16-PORT PoE+ WEB-MANAGED GIGABIT ETHERNET SWITCH

WITH 2 SFP PORTS

MODEL 560931

INTELLINET®
NETWORK SOLUTIONS

INT-560931-UM-10-14-01

FCC Warning

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy. It may cause harmful interference to radio communications if the equipment is not installed and used in accordance with the instructions. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CE Warning

This is a Class A product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

Content

1. Product Overview 8
1.1 Major Management Features 8
1.2 Product Specifications 9
1.3 Package Contents 12
1.4 UL Warning 12
2. Hardware Description 13
3. Preparation for Management 15
3.1 Preparation for Serial Console 15
3.2 Preparation for Web Interface 16
3.3 Preparation for Telnet/SSH Interface 18
4. Feature Configuration - Web UI 20
4.1 System Configuration 20
4.1.1 System Information 20
4.1.2 IP Configuration 21
4.1.3 IPv6 Configuration 22
4.1.4 NTP Configuration 23
4.1.5 System Log Configuration 24
4.2 Power Reduction 26
4.2.1 LED Power Reduction Configuration 26
4.2.2 EEE Configuration 27
4.3 Port Configuration 28
4.4 Security Configuration 30
4.4.1 Security / Switch 30
4.4.1.1 Security / Switch / Users Configuration 30
4.4.1.2 Security / Switch / Privilege Levels Configuration 31
4.4.1.3 Security / Switch / Auth Method 33
4.4.1.4 Security /Switch / SSH Configuration 34
4.4.1.5 Security / Switch / HTTPS Configuration 34
4.4.1.6 Security / Switch / Access Management Configuration 35
4.4.1.7 Security / Switch / SNMP 37
4.4.1.8 RMON Statistics Configuration 45
4.4.2 Security / Network 50
4.4.2.1 Port Security Limit Control Configuration 50
4.4.2.2 Security / Network / Network Access Server Configuration 53
4.4.2.3 Security / Network / Access Control List Configuration 60
4.4.2.4 Switch / Network / DHCP Configuration 74

4.4.2.5 IP Source Guard Configuration 76
4.4.2.6 ARP Inspection 78
4.4.3 Security / AAA Authentication Server Configuration 79
4.5 Aggregation Configuration 83
4.5.1 Static Aggregation 83
4.5.2 LACP - Dynamic Aggregation 84
4.6 Loop Protection 86
4.7 Spanning Tree 87
4.7.1 Spanning Tree / Bridge Setting 87
4.7.2 Spanning Tree / MSTI Mapping 89
4.7.3 Spanning Tree / MSTI Priorities 91
4.7.4 Spanning Tree / CIST Ports 92
4.7.5 Spanning Tree MSTI Ports 94
4.8 MVR (Multicast VLAN Registration) 96
4.9 IPMC (IP Multicast) 97
4.9.1 IGMP Snooping Configuration 97
4.9.1.1 Basic Configuration 97
4.9.1.2 IGMP Snooping VLAN Configuration 99
4.9.1.3 IGMP Snooping / Port Group Filtering 101
4.9.2 MLD Snooping Configuration 102
4.9.2.1 Basic Configuration 102
4.9.2.2 MLD Snooping VLAN Configuration 103
4.9.2.3 IPMC / MLD Snooping / Port Group Filtering 105
4.10 LLDP Parameters 106
4.10.1 LLDP Configuration 106
4.10.2 LLDP Media Configuration 108
4.11 PoE Configuration 115
4.12 MAC Address Table Configuration 118
4.13 VLAN (Virtual LAN) 121
4.13.1 VLAN Membership Configuration 121
4.13.2 VLAN Port Configuration 123
4.14 Private VLANs 125
4.14.1 Private VLAN Membership Configuration 125
4.14.2 Port Isolation Configuration 126
4.15 VCL 128
4.15.1 VCL / MAC-Based VLAN Configuration 128
4.15.2 VCL / Protocol-based VLAN 129
4.15.3 VCL / IP Subnet-based VLAN 131

4.16 Voice VLAN Configuration.....133
4.16.1 Voice VLAN / Configuration.....133
4.16.2 Voice VLAN / OUI Configuration.....135
4.17 QoS.....136
4.17.1 QoS / Ingress Port Classification.....136
4.17.2 QoS / Ingress Port Policer Config.....137
4.17.3 QoS / Port Scheduler.....138
4.17.4 QoS / Egress Port Shapers.....139
4.17.5 QoS / Port Tag Remarking.....140
4.17.6 QoS / Port DSCP Configuration.....141
4.17.7 QoS / DSCP based QoS Ingress Classification.....142
4.17.8 QoS / DSCP Translation.....144
4.17.9 QoS / DSCP Classification.....145
4.17.10 QoS / Control List Configuration.....146
4.17.11 QoS / Storm Control Configuration.....148
4.18 Mirroring Configuration.....150
4.19 UPnP Configuration.....152
4.20 sFlow Configuration.....153
5. Feature Configuration - CLI.....155
5.1 System Configuration.....155
5.2 Power Reduction.....159
5.3 Port Configuration.....160
5.4 Security Configuration.....161
5.5 Aggregation Configuration.....172
5.6 Loop Protection.....173
5.7 Spanning Tree.....174
5.8 MVR.....176
5.9 IPMC.....177
5.10 LLDP Configuration.....178
5.11 Power over Ethernet Configuration.....179
5.12 MAC Address Table Configuration.....180
5.13 VLAN Configuration.....181
5.14 Private VLAN Configuration.....181
5.15 VCL Configuration.....182
5.16 Voice VLAN Configuration.....183
5.17 QoS Configuration.....184
5.18 Mirroring Configuration.....186
5.19 UPnP Configuration.....187

5.20 sFlow Configuration 187
5.21 Diagnostic Commands 188
5.22 Maintenance Commands 189
6. Web Configuration - Monitor, Diagnostic, Maintenance 191
6.1 Monitor 191
6.1.1 Monitor / System 191
6.1.1.1 Monitor / System / Information 191
6.1.1.2 CPU Load 192
6.1.1.3 System Log Information 192
6.1.1.4 System / Detailed Log 194
6.1.2 Monitor / Port State 194
6.1.2.1 Port State 194
6.1.2.2 Traffic Overview 195
6.1.2.3 QoS Statistics 196
6.1.2.4 QCL Status 197
6.1.2.5 Detailed Port Statistics 199
6.1. 3 Monitor / Security 203
6.1.3.1 Security / Access Management Statistics 203
6.1.3.2 Security / Network 204
6.1.3.3 Security / AAA 223
6.1.3.4 Switch / SNMP / RMON 230
6.1.4 LACP System Status 236
6.1.4.1 System Status 236
6.1.4.2 LACP Port Status 237
6.1.4.3 LACP statistics 238
6.1.5 Loop Protection 239
6.1.6 STP Bridge Status 240
6.1.6.1 Bridge Status 240
6.1.6.2 STP Port Status 241
6.1.6.3 STP Port Statistics 242
6.1.7 MVR Status 243
6.1.7.1 Statistics 243
6.1.7.2 MVR Group Table 244
6.1.8 Monitor / IPMC / IGMP Snooping 245
6.1.8.1 IGMP Snooping 245
6.1.8.2 MLD Snooping Status 249
6.1.9 Monitor / LLDP 253
6.1.9.1 LLDP / Neighbor 253

6.1.9.2 LLDP MED Neighbors 255
6.1.9.3 LLDP PoE 259
6.1.9.4 LLDP EEE 260
6.1.9.5 LLDP Statistics 263
6.1.10 Dynamic MAC Table 265
6.1.11 VLAN Membership Status 266
6.1.13 VCL MAC-Based VLAN Status 271
6.1.14 sFlow 272
6.2 Diagnostic 273
6.2.1 Ping 273
6.2.2 Ping6 274
6.2.3 VeriPHY Cable Diagnostic 275
6.3 Maintenance 277
6.3.1 Restart Device 277
6.3.2 Factory Defaults 277
6.3.3 Software Upload 278
6.3.3.1 Firmware Update 278
6.3.3.2 Image Select 278
6.3.4 Configuration 280
Revision History 281

1. Product Overview

This is a Layer 2 full-management Gigabit PoE switch, featuring 16 10/100/1000M RJ45 ports plus 2 Gigabit SFP open slots. The Ethernet ports support IEEE 802.3at PoE, and each port supports up to 30W. The SFP open slots are available for different types of SFP transceivers to extend the transmission distance up to 100 kilometers. Including rackmount brackets, the 19" size fits into your rack environment.

This switch's embedded and powerful Layer 2 software engine supports Web Management, SNMP, IPv4/v6, IEEE 802.1Q VLAN, Private VLAN, Protocol VLAN, Voice VLAN, QoS with up to 4 priority queues, up to 13 Link Aggregation groups, Multiple Spanning Tree Protocol, IGMPv4/v6 IP Multicast Forwarding and Filtering, MVR, Bandwidth Control, Loop Protection, LLDP, PoE Configuration and abundant security features such as IEEE 802.1X, AAA, IP Source Guard, Port Security and Access Management. With these advanced L2 management features, the switches are ideal for the medium or large network environment to strengthen its network connection.

1.1 Major Management Features

- 8/16/24 10/100/1000Base RJ45 plus 2 1000Base SFP
- 8/16/24 10/100/1000Base RJ45 are all built with PoE functionality
- Up to 20/36/52Gbps switching capacity, 8K MAC Address Table
- Each port supports up to 30W per IEEE 802.3af/at
- Per-Port Power Management Feature supports Enable/Disable, Priority Setting, Overloading Protection and Power Level settings
- IEEE 802.1D STP and IEEE 802.1w RSTP
- IEEE 802.1Q VLAN, up to 4K VLAN Group
- Port-Based VLAN, MAC-Based VLAN, Protocol-Based VLAN, MVRP and QinQ
- IEEE 802.2ad LACP, Static Trunk support up to 13 trunks, up to 16 ports per trunk
- IGMP Snooping V1/V2/V3 and Querier port
- Up to 9K Jumbo Frame
- Rate Control and Storm Control for Broadcast/Multicast/Unknown Unicast
- QoS supports up to 8 priority queues per port, 802.1p/IP Precedence, IP ToS, IP DSCP, DiffServ, the queue scheduling supports WRR, Strict Priority and Hybrid
- Advanced Security supports IEEE 802.1x, RADIUS, TACAS+, IP/MAC Filter
- Support Command Line, Web Management, SNMP V1/V2c/V3, RMON, Secured Management supports HTTPS, SSL and SSHv2
- sFlow, NTP, LLDP, Port Mirroring, Cable Diagnostic, UPnP
- IPv6 Features

Note: Refer to the website datasheet for details and product specifications.

1.2 Product Specifications

Hardware Specification				
Interface	Total Ports	**10**	**18**	**26**
	10/100/1000 Mbps	**8**	**16**	**24**
	Gigabit SFP	**2**	**2**	**2**
	Autonegotiation and Auto-MDIX	**Yes**	**Yes**	**Yes**
	Flow Control	**Backpressure for half duplex, 802.3x for full duplex**		
	Console (RS-232)	**Yes**		
LEDs	System (State / Color)	**Y**		
	Port (State: Link/Act / Color)	**Y**		
	PoE (State: On / Color)	**Y**		
System	CPU	**416MHz**		
	Flash	**16MB**		
	SDRAM	**128MB**		
	Packet Buffer	**4Mb**		
	Switching Capacity	**20/36/52Gbps non-blocking**		
	Forwarding Architecture	**Store and forward**		
	Package Forwarding Rate	**14.8/26.8/38.7Mpps (@** 64bytes)		
	MAC Address Table	**8K**		
	Jumbo Frames	**9K**		
PSE Ports	Port Volume	**8**	**16**	**24**
	PoE Capability	**30W (802.3at)**		
	Total PSE Power	**120/230/500W (Current Share)**		
	Power through RJ45 pins	**Pair 1,2 / 3,6**		
Power Requirement / Consumption	AC Input	**100-240V AC, 50/60Hz**		
	Consumption - not including PSE	**10W**	**17W**	**25W**
Environmental	Operating Temperature / ˚C	**0-40**		
	Relative Humidity while operating	**5-90% (non-condensing)**		
	Storage Temperature / ˚C	**-20 – 80**		
	Relative Humidity at storage	**5-90% (non-condensing)**		
Mechanical	Dimensions mm (HxWxD)	**44x330x210**	**44x330x210**	**44x440x331**
	Weight	**2.45 kg**	**2.45 kg**	**3.0 kg**
Compliance	CE, FCC Part 15 Class A	**Yes**		

Software Specifications

Standards	IEEE 802.3 - 10Base-T
	IEEE 802.3u - 100Base-TX
	IEEE 802.3ab - 1000Base-T
	IEEE 802.3z - 1000Base-SX/LX
	IEEE 802.3x - Flow Control
	IEEE 802.1Q - VLAN
	IEEE 802.1p - Class of Service
	IEEE 802.1D - Spanning Tree
	IEEE 802.1w - Rapid Spanning Tree
	IEEE 802.1s - Multiple Spanning Tree
	IEEE 802.3ad - Link Agregation Control Protocol (LACP)
	IEEE802.1v - Protocol VLAN
	IEEE 802.1AB - LLDP (Link Layer Discovery Protocol)
	IEEE 802.1X - Access Control
	IEEE 802.3at - Power over Ethernet
	IEEE 802.3af - Power over Ethernet
Port Configuration	Link State, Speed/Duplex, Auto-Nego, Flow Control
	Rate Control/Limit
VLAN	Port based and 802.1Q Tag-based VLAN
	Maximum 4K VLAN Group, 4096 VLANs ID
	QinQ
	Private VLAN
	MVR (Multicast VLAN Registration)
	MAC based VLAN
	IP Subnet-based VLAN
	IEEE802.1v Protocol VLAN
	Voice VLAN
QoS	4 Physical priority queues
	Scheduling - WRR, Strict, WRR+SP
	CoS: Port-based, 802.1p, DSCP, TCP/UDP Port-based
	Storm Control (Broadcast, Multicast, unknown Unicast)
Link Agreggation	Static and 802.3ad LACP
	Static Trtunk
	Hash Algorithm Type (DA, SA, DA+SA MAC-based, SIP...)
Loop Protection	Protect the unexpected network loop by shutdown port
Spanning Tree	IEEE 802.1D - Legacy Spanning Tree
	IEEE 802.1w - Rapid Spanning Tree

	IEEE 802.1s - Multiple Spanning Tree
	BPDU Guard, BPDU Filtering
Multicast	IGMP Snooping v1/v2/v3, MLD(IPv6) Snooping v1/v2
	Maximum 8K Multicast Groups
	IGMP/MLD Querier, Router Port, Proxy, Immediate Leave
Traffic Mirroring	Port Mirror (1 to 1, 1 to N, N to 1)
	sFlow
MAC Address Table	Dynamic MAC address management
	Static MAC address
Security	Port Security (MAC-Port, IP-MAC-Port Binding)
	802.1x authentication (Port based, MAC address based)
	User Name Password Authentication by Local/RADIUS…
	Up to 15 User Privilege Levels
	Access Management by IP
	IP Source Guard
	RADIUS
	TACACS+
	Guest VLAN
	DoS Defense
	SSHv1/SSHv2
	SSLv2/SSLv3/TLSv1
	Access Control List (L2/L3/L4)
Management	Web GUI Management, CLI (Console/Telnet/SSH)
	DHCP Client, Snooping, Relay/Option 82, BOOTP
	SNMP V1/V2c/V3, Trap, RMON
	Firmware upgrades by TFTP/HTTP
	Configurration Backup/Reload
	Link Layer Discovery Protocol (LLDP) by IPv4/v6 types
	System Log for events, warnings and information
	NTP

Maintenance	VeriPHY Diagnostic
	IPv4/V6 Ping Diagnostics

	CPU Monitor
PoE Specifications	Per port POE State Enable/Disable
	Maximum system/port PoE power setting
	Port power priority setting
	PD Status monitoring

1.3 Package Contents

Before you start to install this switch, verify that the packaging contains the following items:

- One Network Switch
- One Power Cord
- One User Manual on CD
- One Rackmount Kit + 8 Screws





1.4 UL Warning

If using this switch in conjunction with the similar 8-port (+ 2 SFPs) model, note that that model is designed for building installations and is not intended to be connected to exposed (outside plant) networks (including campus environments), and the ITE is to be connected only to PoE networks without routing to the outside plant.

2. Hardware Description

This section mainly describes the hardware of the switch and gives a physical and functional overview of it.

Front Panel

The front panel of the switch consists of 16 (Model 560931) 10/100/1000 Base-TX RJ45 ports and 2 Gigabit uplink SFP ports. The LED Indicators are also located on the front panel.

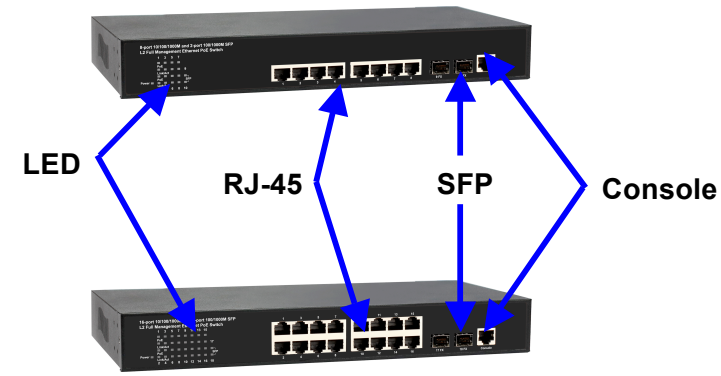

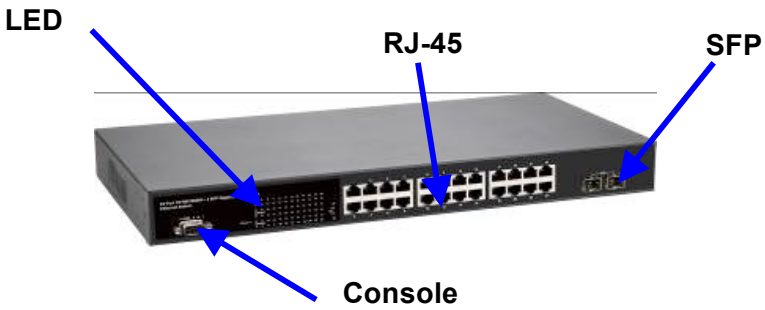

LED Indicators

The LED Indicators present real-time information of systematic operation status. The following table is an example (24-port model) of the LEDs' status and their meaning.

LED	Color / Status	Description	No. of LEDs
Power	Amber On	Power on	Power
10/100/1000M	Green On	Link Up	1-24
	Green Blinking	Data Activating	
PoE	Amber On	PD is connected	1-24
SFP	Green On	linked to Power Device	25-26
	Green Blinking	Data Activating	25-26

Rear Panel

The 3-pronged power plug is on the rear panel of the switch.

Hardware Installation

The switch is usually mounted in a 19” rack, which is usually installed in an IT room or other secure place. The switch supports AC power input, PoE delivery and rackmount mounting. Make sure all the power cables, Ethernet cables, screws and the air circulation are well prepared and installed as directed below.

AC Power Input

Connect the attached power cord to the AC power input connector. The compatible AC power input range is from 100 to 264 VAC.

Ethernet cable Request

Wiring cable types:.

10 Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable, EIA/TIA-568 100-ohm (Max. 100m)

100 Base-TX: 2-pair UTP/STP Cat. 5 cable, EIA/TIA-568 100-ohm (Max. 100m)

1000 Base-T: 4-pair UTP/STP Cat. 5 cable, EIA/TIA-568 100-ohm (Max. 100m)

PoE: To deliver power without problems, Cat 5e or Cat 6 cable is suggested, as high-quality Ethernet cable reduces the loss of power during transmission.

SFP Installation

When installing an SFP transceiver, make sure the SFP type at each end is the same and the transmission distance, wavelength and fiber cable can meet your demands. It is recommended that the SFP transceiver be purchased with the switch to avoid any incompatibility issues.

When connecting, plug the SFP fiber transceiver in first. The SFP transceiver has 2 plugs for fiber cable: one is TX (transmit), the other is RX (receive). Cross-connect the transmit channel at each end to the receive channel at the opposite end.

Rackmount Installation

Attach the brackets to the device by using the screws provided in the Rackmount Kit.

Mount the device in the 19" rack by using four rackmounting screws provided by the rack manufacturer.

3. Preparation for Management

The switch provides both in-band and out-band configuration methods.

Out-band Management: You can configure the switch using RS232 console cable if you don't attach your admin PC to your network, or if you lose the network connection to your switch. It wouldn't be affected by network performance. This is so-called out-band management.

In-Band Management: You can remotely manage the switch via a Web browser, such as Microsoft Internet Explorer or Mozilla, to configure and operate the switch from anywhere on the network.

The following topics are covered in this chapter:

3.1 Preparation for Serial Console

3.2 Preparation for Web Interface

3.1 Preparation for Serial Console

In the package, there is one R232 console cable. Attach one end of the console cable to your PC COM port, the other end to the console port of the switch.

1. Go to Start → Program → Accessories → Communication → Hyper Terminal
2. Give a name to the new console connection.
3. Choose the COM name.
4. Select correct serial settings. The serial settings of the switch are as below:

   Baud Rate: 115200 / Parity: None / Data Bit: 8 / Stop Bit: 1
5. After connecting, you can see Switch login request.
6. Log in to the switch. The default username is "admin"; the password, "admin."

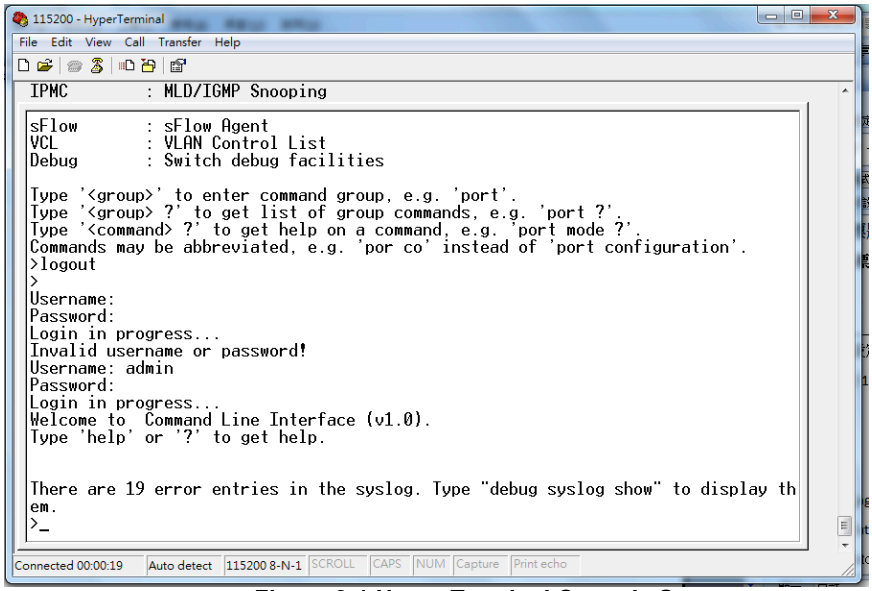
115200 - HyperTerminal
File Edit View Call Transfer Help
IPMC : MLD/IGMP Snooping
sFlow : sFlow Agent
VCL : VLAN Control List
Debug : Switch debug facilities
Type '<group>' to enter command group, e.g. 'port'.
Type '<group> ?' to get list of group commands, e.g. 'port ?'.
Type '<command> ?' to get help on a command, e.g. 'port mode ?'.
Commands may be abbreviated, e.g. 'por co' instead of 'port configuration'.
>logout
>
Username:
Password:
Login in progress...
Invalid username or password!
Username: admin
Password:
Login in progress...
Welcome to Command Line Interface (v1.0).
Type 'help' or '?' to get help.
There are 19 error entries in the syslog. Type "debug syslog show" to display th
em.
>_
Connected 00:00:19
Auto detect
115200 8-N-1
SCROLL
CAPS
NUM
Capture
Print echo

Figure 3-1 Hyper Terminal Console Screen

Note: The Win 7 or later OS version doesn't provide the Console Terminal tool, but you can search for and download the tool: Hyper Terminal from the Microsoft website or other terminal tools, such as PuTTY for a console connection.

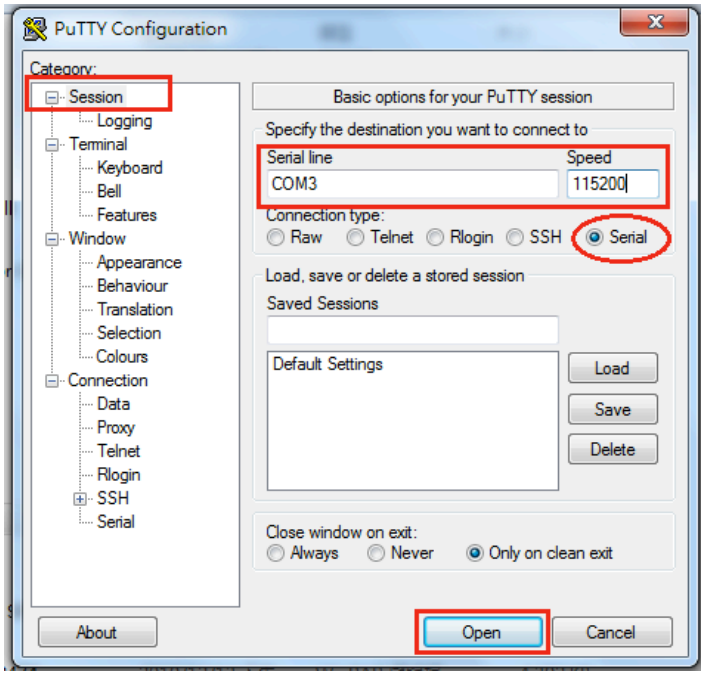

Figure 3-2 PuTTY Configuration

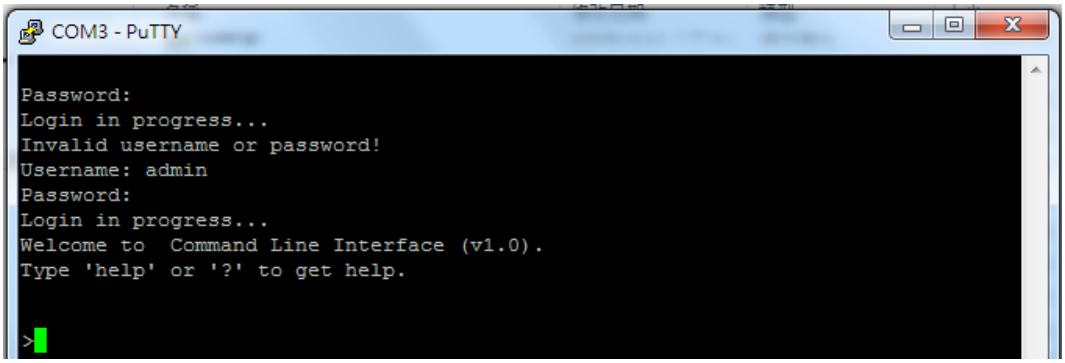

Figure 3-3 PuTTY Login Screen

3.2 Preparation for Web Interface

The Web Management page allows you to use a standard Web browser — such as Microsoft Internet Explorer, Google Chrome or Mozilla Firefox — to configure the switch from anywhere on the network.

Before you attempt to use the Web user interface to manage switch operation, verify that your switch is properly installed on your network and that every PC on this network can access the switch via the Web browser.

1. Verify that your network interface card (NIC) is operational, and that your operating system supports the TCP/IP protocol.
2. Connect the switch to a power source and connect your computer to the switch.
3. The switch default IP address is 192.168.2.1. The switch and the connected PC should be located within the same IP subnet.

4. Change your computer's IP address to 192.168.2.XX or another IP address that is located in the 192.168.2.x subnet (for example: IP Address: 192.168.2.30; Subnet Mask: 255.255.255.0).

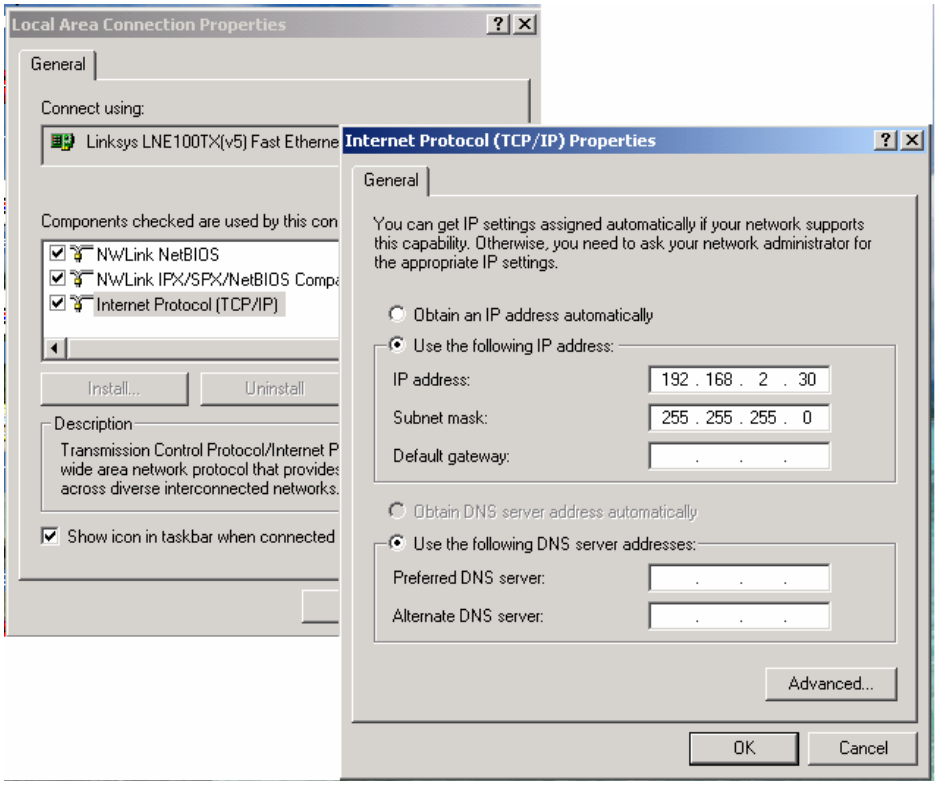
Local Area Connection Properties
General
Connect using:
Linksys LNE100TX(v5) Fast Etherne
Components checked are used by this con
NWLink NetBIOS
NWLink IPX/SPX/NetBIOS Compa
Internet Protocol (TCP/IP)
Install...
Uninstall
Description
Transmission Control Protocol/Internet P
wide area network protocol that provides
across diverse interconnected networks.
Show icon in taskbar when connected
Internet Protocol (TCP/IP) Properties
General
You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.
Obtain an IP address automatically
Use the following IP address:
IP address: 192 . 168 . 2 . 30
Subnet mask: 255 . 255 . 255 . 0
Default gateway:
Obtain DNS server address automatically
Use the following DNS server addresses:
Preferred DNS server:
Alternate DNS server:
Advanced...
OK
Cancel

Launch the Web browser and log in.

5. Launch the Web browser (Internet Explorer or Mozilla Firefox) on the PC.
6. Type “http://192.168.2.1” (or the IP address of the switch). And then press **Enter**.
7. The login screen will appear next.
8. Key in the password. Default user name and password are both “admin.”

If you can't log in to the switch, the following steps can help you to identify the problem.

1. Switch to DOS command mode and type "ipconfig" to check the NIC's setting. Type "ping 192.168.2.1" to verify a normal response time.

2. Check the security and firewall settings of your computer.

3. Try a different Web browser.

3.3 Preparation for Telnet/SSH Interface

If your Window OS is Win XP, Win 2000 or an earlier version, you can access the Telnet console by default command. If your OS is Window 7 or a later version, download a terminal tool, such as HyperTeminal or PuTTY.

The switch supports both Telnet and SSH consoles. The SSH console can be treated as a secured Telnet connection, but you need to enable the SSH feature in "Security / Switch / SSH."

Traditional Telnet Connection

1. Go to Start → Run → cmd. And then press **Enter**.
2. Type “Telnet 192.168.2.1” (or the IP address of the switch). And then press **Enter**.

Access Telnet or SSH by Terminal tool PuTTY.

1. Open Telnet/SSH Client/PuTTY

In the Session configuration, choose Telnet/SSH in the Protocol field.

In the Session configuration, enter the Host Name (IP Address of your switch) and Port number (default Telnet =23, SSH = 22).

Then click **Open** to start the SSH session console.

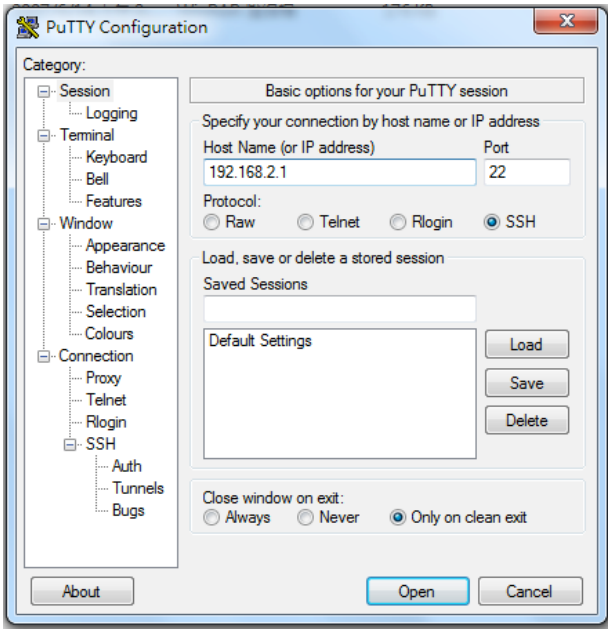

2. After you click **Open**, you can see the cipher information in the popup screen. Press **Yes** to accept the Security Alert.

If you choose the Telnet connection, there is no such cipher information and window. It goes directly to the next step.

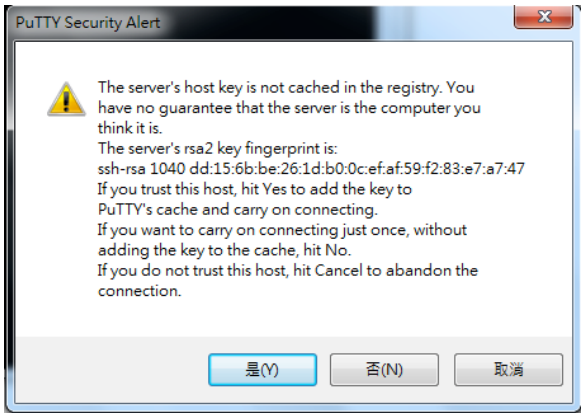
PuTTY Security Alert
The server's host key is not cached in the registry. You have no guarantee that the server is the computer you think it is.
The server's rsa2 key fingerprint is:
ssh-rsa 1040 dd:15:6b:be:26:1d:b0:0c:ef:af:59:f2:83:e7:a7:47
If you trust this host, hit Yes to add the key to PuTTY's cache and carry on connecting.
If you want to carry on connecting just once, without adding the key to the cache, hit No.
If you do not trust this host, hit Cancel to abandon the connection.
是(Y)
否(N)
取消

3. After few seconds, the Telnet/SSH connection is established, the login page of Telnet/SSH is the same as console. The command line of Telnet, SSH and console are all the same.

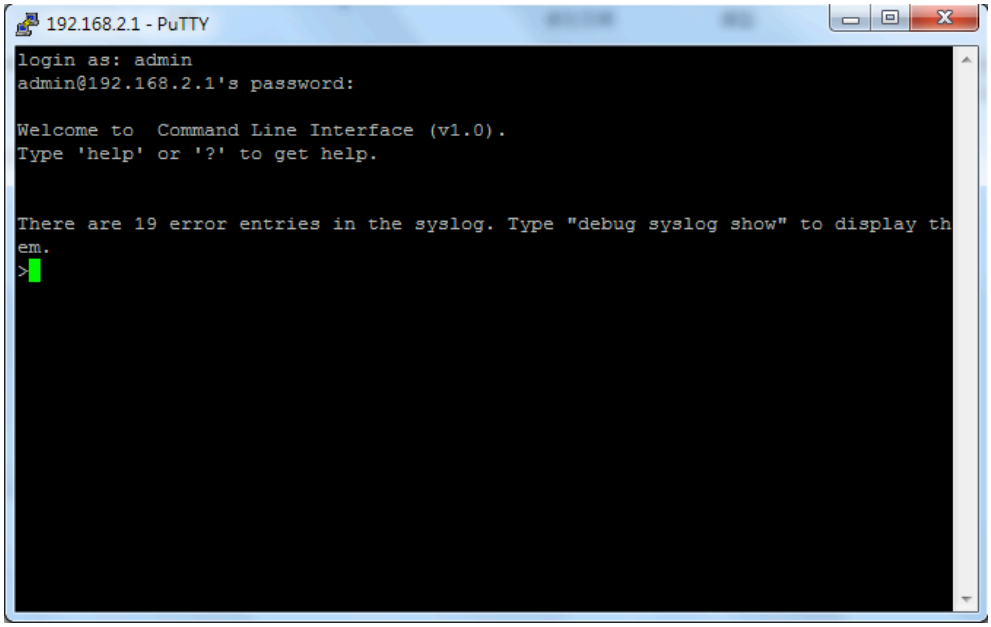
192.168.2.1 - PuTTY
login as: admin
admin@192.168.2.1's password:
Welcome to Command Line Interface (v1.0).
Type 'help' or '?' to get help.
There are 19 error entries in the syslog. Type "debug syslog show" to display th
em.
>

4. Feature Configuration - Web UI

The switch provides abundant software features. After you log in to the switch, you can start configuring the settings or monitoring the status. There is a question mark at the top right of the screen that you can click to get help from the system.

Following are Web UI configuration guides for your reference.

4.1 System Configuration

4.1.1 System Information

This page shows the system information and allows you to configure the new settings.

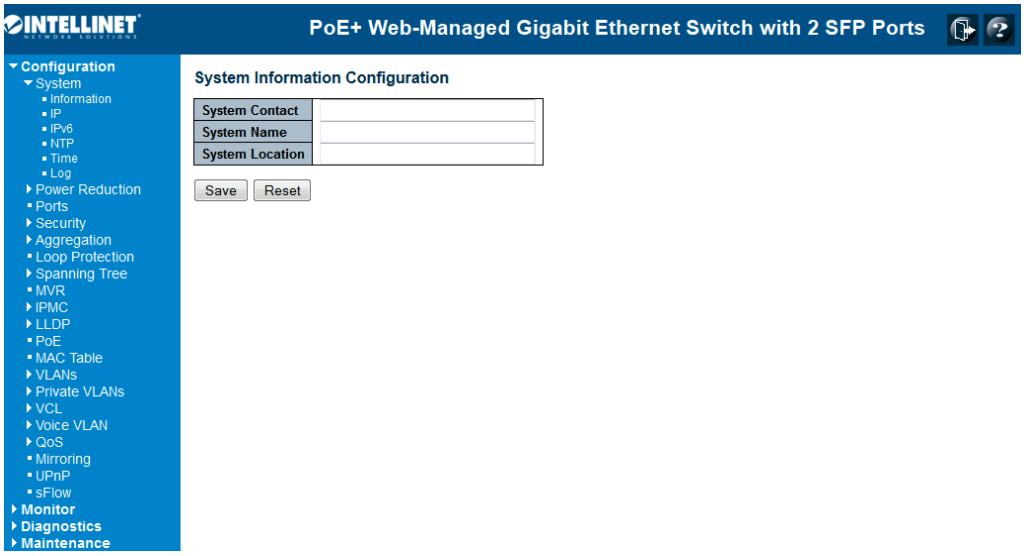

System Contact

The textual identification of the contact person for this managed node, together with information on how to contact this person.

System Name

An administratively assigned name for this managed node. By convention, this is the node's fully qualified domain name. A domain name is a text string drawn from the alphabet (A-Z, a-z), digits (0-9) and minus sign (-). No space characters are permitted as part of a name. The first character must be an alpha character, and the first or last character must not be a minus sign. The allowed string length is up to 255.

System Location

The physical location of this node (e.g., telephone closet, 3rd floor). The allowed string length is up to 255, and the allowed content is 32 to 126 ASCII characters.

Time zone Offset

Provide the time zone offset relative to UTC/GMT. The offset is given in minutes east of GMT. The valid range is from -720 to 720 minutes.

Buttons:

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.1.2 IP Configuration:

Configure the switch-managed IP information on this page.

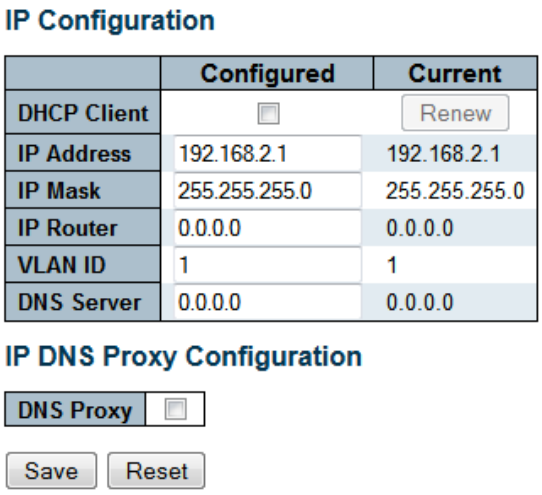

The Configured column is used to view or change the IP configuration.

The Current column is used to show the active IP configuration.

DHCP Client

Enable the DHCP client by checking this box. If DHCP fails and the configured IP address is zero, DHCP will retry. If DHCP fails and the configured IP address is non-zero, DHCP will stop and the configured IP settings will be used. The DHCP client will announce the configured System Name as hostname to provide DNS lookup.

IP Address

Provide the IP address of this switch in dotted decimal notation.

IP Mask

Provide the IP mask of this switch in dotted decimal notation.

IP Router

Provide the IP address of the router in dotted decimal notation.

NTP Server

Provide the IP address of the NTP Server in dotted decimal notation.

DNS Server

Provide the IP address of the DNS Server in dotted decimal notation.

VLAN ID

Provide the managed VLAND ID. The allowed range is 1 to 4095.

DNS Proxy

When DNS proxy is enabled, the switch will relay DNS requests to the current configured DNS server on the switch, and reply as a DNS resolver to the client device on the network.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Renew: Click to renew DHCP. This button is only available if DHCP is enabled.

4.1.3 IPv6 Configuration

Configure the switch-managed IPv6 information on this page:

IPv6 Configuration

	Configured	Current
Auto Configuration	☑	Renew
Address	::192.168.2.1	::192.168.2.1 Link-Local Address: fe80::203:ceff:fe20:8d4f
Prefix	96	96
Router	::	::

Save Reset

The Configured column is used to view or change the IPv6 configuration.

The Current column is used to show the active IPv6 configuration.

Auto Configuration

Enable IPv6 auto-configuration by checking this box. If it fails, the configured IPv6 address is zero. The router may delay responding to a router solicitation for a few seconds. The total time needed to complete auto-configuration can be significantly longer.

Address

Provide the IPv6 address of this switch. The IPv6 address is in 128-bit records represented as eight fields of up to four hexadecimal digits with a colon separating each field (:). For example, “fe80::215:c5ff:fe03:4dc7.” The symbol :: is a special syntax that can be used as a shorthand way of representing multiple 16-bit groups of contiguous zeros; but it can only appear once. It can also represent a legally valid IPv4 address. For example, “::192.1.2.34.”

Prefix

Provide the IPv6 Prefix of this switch. The allowed range is `1` to `128`.

Router

Provide the IPv6 gateway address of this switch. The IPv6 address is in 128-bit records represented as eight fields of up to four hexadecimal digits with a colon separating each field (:). For example, “fe80::215:c5ff:fe03:4dc7.”

The symbol :: is a special syntax that can be used as a shorthand way of representing multiple 16-bit groups of contiguous zeros; but it can only appear once. It can also represent a legally valid IPv4 address. For example, “::192.1.2.34.”

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Renew: Click to renew IPv6 AUTOCONF. This button is only available if IPv6 AUTOCONF is enabled.

4.1.4 NTP Configuration:

NTP is short for Network Time Protocol. Network Time Protocol (NTP) is used to synchronize time clocks on the Internet. You can configurethe NTP Server’s IP address here to synchronize the clocks of the remote time server on the network.

This page indicates the NTP mode operation:

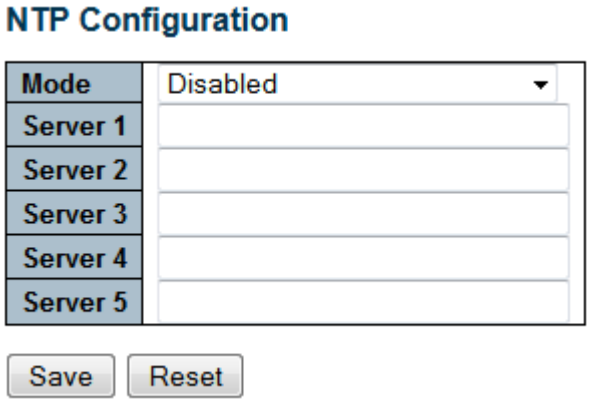

Mode

Possible modes:
Enable NTP mode operation. When NTP mode operation is enabled, the agent forwards NTP messages between the clients and the server when they are not on the same subnet domain.
Disable NTP mode operation.

Server #

Provide the NTP IPv4 or IPv6 address of this switch. The IPv6 address is in 128-bit records represented as eight fields of up to four hexadecimal digits with a colon separating each field (:). For example, “fe80::215:c5ff:fe03:4dc7.” The symbol :: is a special syntax that can be used as a shorthand way of

representing multiple 16-bit groups of contiguous zeros; but it can only appear once. It can also represent a legally valid IPv4 address. For example, "::192.1.2.34."

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.1.5 System Log Configuration:

System Log is useful to allow the system administrator to monitor the switch's events history. The switch supports syslog server mode. You can install the syslog server in one computer, then configure the server address and event types in the switch's system log configuration. When the events occur, the switch will send information or warning messages to the syslog server. The administrator can analysyze the system logs recorded in the syslog server to find out the cause of the issues.

The switch Web UI allows you to Enable the Syslog Server, assign the IP address and assign the syslog level.

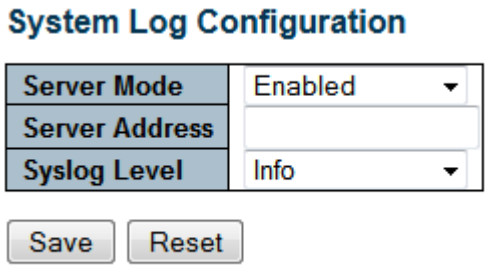

Server Mode

Indicates the server mode operation. When the mode operation is enabled, the syslog message will send out to syslog server. The syslog protocol is based on UDP communication and received on UDP port 514 and the syslog server will not send acknowledgments back sender since UDP is a connectionless protocol and it does not provide acknowledgments. The syslog packet will always send out even if the syslog server does not exist. Possible modes:
Enable server mode operation.
Disable server mode operation.

Server Address

Indicates the IPv4 host address of the syslog server. If the switch provides a DNS feature, it also can be a host name.

Syslog Level

Indicates what kind of message will be sent to the syslog server. Possible modes:
Info: Send information, warnings and errors.
Warning: Send warnings and errors.
Error: Send errors.

4.2 Power Reduction

4.2.1 LED Power Reduction Configuration

LED Intensity

LED power consumption can be reduced by lowering the LED intensity. LED intensity could, for example, be lowered during nighttime, or they could be turned completely off. It is possible to configure LED intensity for each hour of the day.

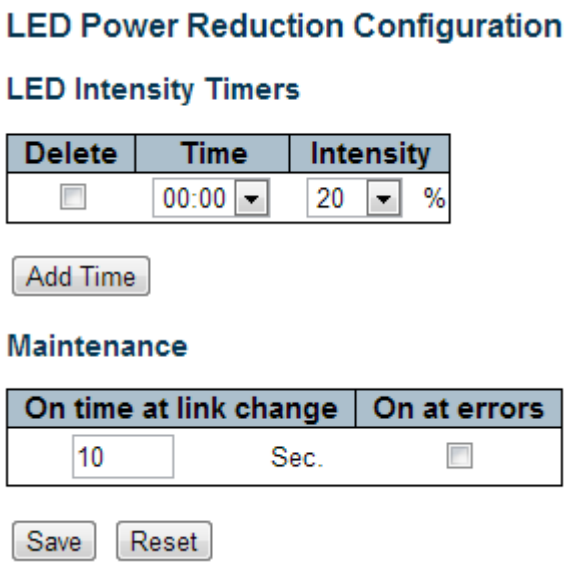

Time

The time at which the LED intensity shall be set. The time settings are in hourly increments.

Intensity

The LED intensity (100% = Full power, 0% = LED off)

Maintenance Time

As a network administrator doing maintenance on the switch (e.g., adding or moving users), you may want to have full LED intensity during the maintenance period. Therefore, it is possible to specify that the LEDs shall use full intensity during a specific period of time.
Maintenance Time is the number of seconds that the LEDs will have full intensity after either a port has changed link state or the LED push button has been pressed.

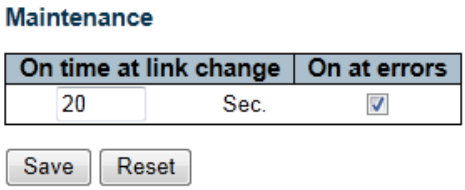

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.2.2 EEE Configuration

This page allows you to inspect and configure the current EEE port settings:

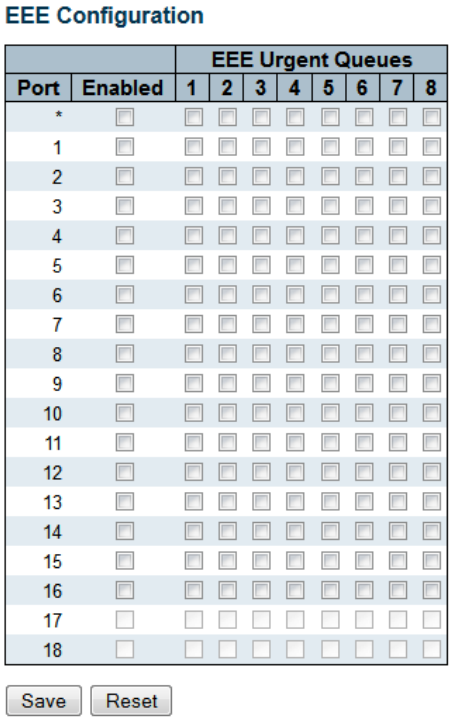

EEE is a power-saving option that reduces the power usage when there is very low traffic utilization (or no traffic).

EEE works by powering down circuits when there is no traffic. When a port gets data to be transmitted, all circuits are powered up. The time it takes to power up the circuits is called wakeup time. The default wakeup time is 17 microsecs. for 1Gbit links and 30 microsecs. for other link speeds. EEE devices must agree upon the value of the wakeup time in order to make sure that both the receiving and transmitting devices have all circuits powered up when traffic is transmitted. The devices can exchange information about wakeup time using the LLDP protocol.

For maximizing the power saving, the circuit isn't started at soon as transmit data is ready for a port, but is instead queued until 3000 bytes of data is ready to be sent. To avoid a long delay in case that data is less than 3000 bytes, data is always transmitted after 48 microsecs., giving a maximum latency of 48 microsecs. + the wakeup time.

If desired, you can minimize the latency for specific frames by mapping the frames to a specific queue (done with QOS), and then marking the queue as an urgent queue. When an urgent queue gets data to be transmitted, the circuits will be powered up at once and the latency will be reduced to the wakeup time.

Port

The switch port number of the logical EEE port.

EEE Enabled

Controls whether EEE is enabled for this switch port.

EEE Urgent Queues

Queues set will activate transmision of frames as soon as any data is available. Otherwise, the queue will postpone the transmsion until 3000 bytes is ready to be transmitted.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.3 Port Configuration:

This page displays current port configurations and link status. Some of the ports settings can also be configured here.

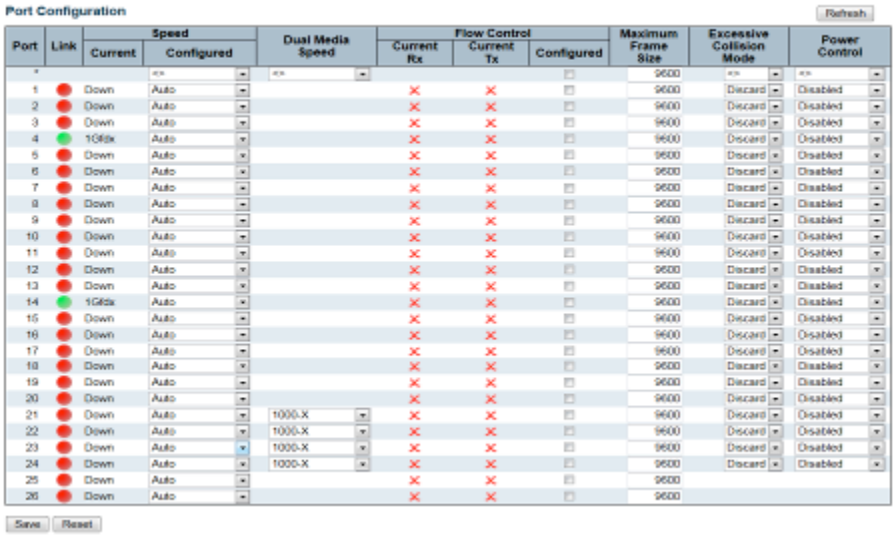

Port

This is the port number for this row.

Link

The current link state is displayed graphically.

Green indicates the link is up and red that it is down.

Current Link Speed

Provides the current link speed of the port.

Ex: 1Gfdx. 1G indicates the Gigabit speed, fdx indicates full duplex mode.

Configured Link Speed

Select any available link speed for the selected switch port.

Auto Speed: Selects the highest speed that is compatible with a link partner.

Disabled: Disables the switch port operation.

Fiber Speed

Configure the speed for a fiber port.

Note: Port speed for the copper ports will automatically be set to Auto when dual media is selected.

Disabled: Disables SFPs (copper port only).

SFP-Auto: Automatically determines the speed at the SFP.

Note: There is no standardized way to do SFP auto detect, so here it is done by reading the SFP rom. As a result, some SFPs might not be detectable.

1000-X force SFP speed to 1000-X.
100-FX force SFP speed to 100-FX.

Flow Control

When Auto Speed is selected on a port, this section indicates the flow control capability that is advertised to the link partner.
When a fixed-speed setting is selected, that is what is used. The Current Rx column indicates whether pause frames on the port are obeyed, and the Current Tx column indicates whether pause frames on the port are transmitted. The Rx and Tx settings are determined by the result of the last Auto-Negotiation.
Check the configured column to use flow control. This setting is related to the setting for Configured Link Speed.

Maximum Frame Size

Enter the maximum frame size allowed for the switch port, including FCS.

The switch supports up to 9K Jumbo Frames.

Excessive Collision Mode

Configure port transmit collision behavior.
Discard: Discard frame after 16 collisions (default).
Restart: Restart backoff algorithm after 16 collisions.

Power Control

The Usage column shows the current percentage of the power consumption per port. The Configured column allows for changing the power savings mode parameters per port.
Disabled: All power savings mechanisms are disabled.
ActiPHY: Link down power savings enabled.
PerfectReach: Link up power savings enabled.
Enabled: Both link up and link down power savings enabled.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Refresh: Click to refresh the page. Any changes made locally will be undone.

4.4 Security Configuration:

The Security Configuration feature has three subsections: Switch, Network and AAA.

4.4.1 Security / Switch

The switch settings include User Database, Privilege Levels, Authentication Method, SSH, HTTPs, Access Management, SNMP and RMON setting.

4.4.1.1 Security / Switch / Users Configuration

This page provides an overview of the current users. Currently, the only way to log in as another user on the Web server is to close and reopen the browser.

This page configures a user: This is also a link to **Add User** & **Edit User**.



Add New User/Edit User

Click "Add New User", and the configuration page goes to "Add User" screen. You can see the User Setting table. Follow the below instructions to fill the table.

Click the created User Name, and the page goes to "Edit User" screen. You can change the settings on it.

User Name

A string identifying the user name that this entry should belong to. The allowed string length is 1 to 32. The valid user name is a combination of letters, numbers and underscores.

Password

The password of the user. The allowed string length is 0 to 32.

Privilege Level

The privilege level of the user. The allowed range is 1 to 15.

If the privilege level value is 15, it can access all groups; i.e., granted full control of the device. But other values need to refer to each group privilege level. User's privilege should be same or greater than the group privilege level to have the access to that group.

By default, most groups' privilege level 5 has the read-only access and privilege level 10 has the read-write access. And the system maintenance (software upload, factory defaults, etc.) need user privilege level 15. Generally, privilege level 15 can be used for an administrator account, privilege level 10 for a standard user account and privilege level 5 for a guest account.

Check the next chapter to see how to configure privilege levels.

Buttons

Add new user: Click to add a new user.

4.4.1.2 Security / Switch / Privilege Level Configuration:

This page provides an overview of the privilege levels.

Privilege Level Configuration

Group Name	Privilege Levels			
	Configuration Read-only	Configuration/Execute Read/write	Status/Statistics Read-only	Status/Statistics Read/write
Aggregation	5	10	5	10
Debug	15	15	15	15
Diagnostics	5	10	5	10
EEE	5	10	5	10
Fan_Control	5	10	5	10
IP	5	10	5	10
IPMC_LIB	5	10	5	10
IPMC_Snooping	5	10	5	10
LACP	5	10	5	10
LLDP	5	10	5	10
LLDP_MED	5	10	5	10
Loop_Protect	5	10	5	10
MAC_Table	5	10	5	10
MVR	5	10	5	10
Maintenance	15	15	15	15
Mirroring	5	10	5	10
PHY	5	10	5	10
POE	5	10	5	10
Port_Security	5	10	5	10
Ports	5	10	1	10
Private_VLANs	5	10	5	10
QoS	5	10	5	10
SNMP	5	10	5	10
Security	5	10	5	10
Spanning_Tree	5	10	5	10
System	5	10	1	10
Timer	5	10	5	10
UPnP	5	10	5	10
VCL	5	10	5	10
VLANs	5	10	5	10
Voice_VLAN	5	10	5	10
sFlow	5	10	5	10

Save Reset

Group Name

The name identifying the privilege group. In most cases, a privilege level group consists of a single module (e.g., LACP, RSTP or QoS), but a few of them contain more than one.

The following description defines these privilege level groups in details:
System: Contact, Name, Location, Time zone, Log.
Security: Authentication, System Access Management, Port (contains Dot1x port, MAC based and the MAC Address Limit), ACL, HTTPS, SSH, ARP Inspection and IP source guard.
IP: Everything except “ping.”
Port: Everything except “VeriPHY.”
Diagnostics: “ping” and '”VeriPHY.”
Maintenance: CLI-System Reboot, System Restore Default, System Password, Configuration Save, Configuration Load and Firmware Load. Web-Users, Privilege Levels and everything in Maintenance.
Debug: Only present in CLI.

Privilege Levels

Every group has an authorization Privilege level for the following subgroups: configuration read-only, configuration/execute read-write, status/statistics read-only, status/statistics read-write (e.g., for clearing statistics).

User Privilege should be the same or greater than the authorization Privilege level to have the access to that group.

Insufficient Privilege Level: If you log in with a lower-level privilege and try to access the higher privilege level configuration feature, the message Insufficient Privilege Level will appear. If you want to continue, be sure that you have the privilege.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.4.1.3 Security / Switch / Auth. Method

This page allows you to configure how a user is authenticated when he logs in to the switch via one of the management client interfaces.

The table has one row for each client type and a number of columns:

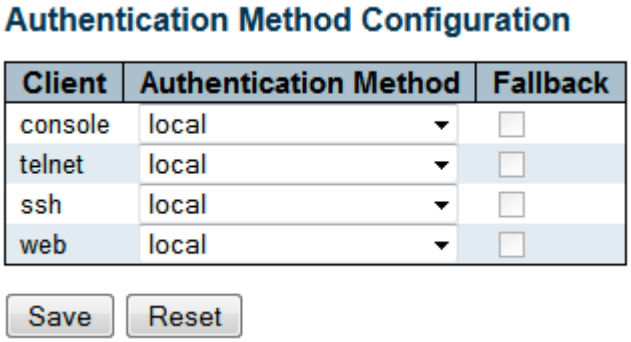

Client

The management client for which the configuration below applies.

Authentication Method

Authentication Method can be set to one of the following values:

none: Authentication is disabled and login is not possible.

local: Use the local user database on the switch for authentication.

RADIUS: Use a remote RADIUS server for authentication.

TACACS+ : Use a remote TACACS server for authentication.

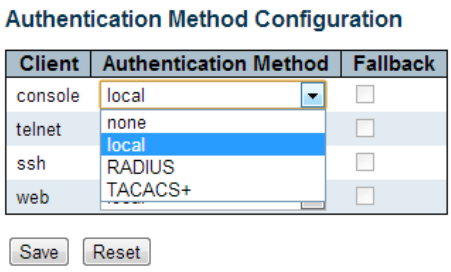

Fallback

Enable fallback to local authentication by checking this box.
If none of the configured authentication servers are alive, the local user database is used for authentication.
This is only possible if the Authentication Method is set to a value other than “none” or “local.”

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.4.1.4 Security / Switch / SSH Configuration

With SSH, you can remotely connect to the switch by command line interface (CLI). The SSH connection can secure all the configuration commands you sent to the switch. It is also known as secured Telnet console.

To access the switch by SSH, you should install an SSH client on you computer, such as the PuTTy console tool. On the switch side, the switch acts as an SSH server for user login, and you can enable or disable SSH on this page.

Check the Chapter 3.3 Preparation for Telnet/SSH connection to see how to manage the switch through SSH console.



Mode

Indicates the SSH mode operation. Possible modes:

Enabled: Enable SSH mode operation.

Disabled: Disable SSH mode operation.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.4.1.5 Security / Switch / HTTPS Configuration

The Web management page also provides secured management HTTPS login. All the configuration commands will be secured and will be hard for hackers to sniff the login password and configuration commands.

This page allows you to configure HTTPS mode.

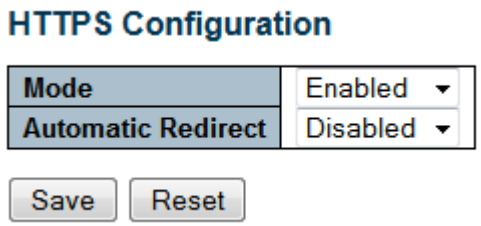

Mode

Indicates the HTTPS mode operation. Possible modes:
Enabled: Enable HTTPS mode operation.
Disabled: Disable HTTPS mode operation.

Automatic Redirect

Indicates the HTTPS redirect mode operation. Automatically redirects the Web browser to HTTPS when HTTPS mode is enabled. Possible modes:

Enabled: Enable HTTPS redirect mode operation.

Disabled: Disable HTTPS redirect mode operation.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.4.1.6 Security / Switch / Access Management Configuration

The Access Management mode allows you to limit the switch access with a specific range of IP addresses and disable some remote management services, such HTTP, HTTPS, SNMP, Telnet and SSH. This feature is important as you install the switch on a network. After enabling Access Management, only the preconfigured IP address or a range of IP addresses can access the switch management interface, and only the available service can be accessed.

Configure the access management table on this page. The maximum entry number is **16.** If the application's type matches any one of the access management entries, it will allow access to the switch.

In the example below, only the IP addresses from 192.168.2.101 to 192.168.2.200 can access the switch's management interface. The available services are HTTP, HTTPS, SNMP, Telnet and SSH. If an IP address such as 192.168.2.201 is used to try to open the web management interface, it is not allowed.

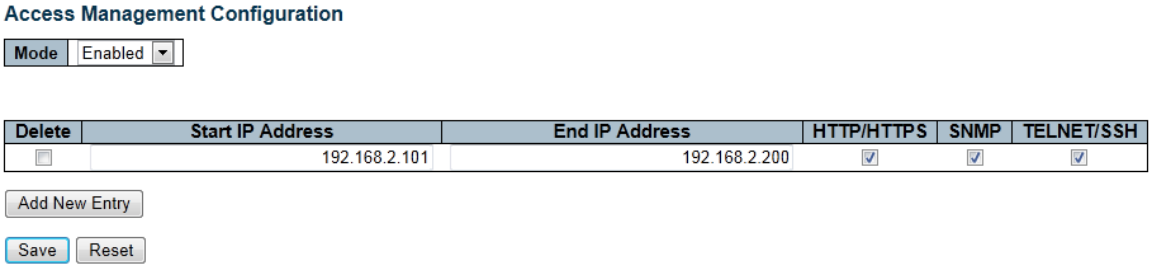

Mode

Indicates the access management mode operation. Possible modes:
Enabled: Enable access management mode operation.
Disabled: Disable access management mode operation.

Delete

Check to delete the entry. It will be deleted during the next save.

Start IP address

Indicates the start IP address for the access management entry.

End IP address

Indicates the end IP address for the access management entry.

With the Start and End IP address, you can assign a range of IP addresses.

HTTP / HTTPS

Indicates that the host can access the switch from the HTTP / HTTPS interface if the host IP address matches the IP address range provided in the entry.

SNMP

Indicates that the host can access the switch from the SNMP interface if the host IP address matches the IP address range provided in the entry.

TELNET / SSH

Indicates that the host can access the switch from the TELNET / SSH interface if the host IP address matches the IP address range provided in the entry.

Buttons

Add New Entry: Click to add a new group entry.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.4.1.7 Security / Switch / SNMP

Simple Network Management Protocol (SNMP) is a protocol used for exchanging management information between network devices. The switch supports SNMP and equips lots of OIDs for remote management. All the OIDs are unique and correspond to one feature/command.

The switch can support SNMP V1, V2c and V3. The following commands show how to configure SNMP and its related parameters.

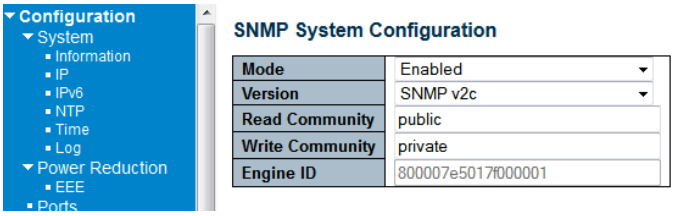

Mode

Indicates the SNMP mode operation. Possible modes:
Enabled: Enable SNMP mode operation.
Disabled: Disable SNMP mode operation.

Version

Indicates the SNMP-supported version. Possible versions:
SNMPv1: Set SNMP-supported version 1.
SNMPv2c: Set SNMP-supported version 2c.
SNMPv3: Set SNMP-supported version 3.

Read Community

Indicates the community read-access string to permit access to the SNMP agent. The allowed string length is 0 to 255, and the allowed content is ASCII characters from 33 to 126.

The field is applicable only when the SNMP version is SNMPv1 or SNMPv2c. If the SNMP version is SNMPv3, the community string will be associated with the SNMPv3 communities table. It provides more flexibility to configure a security name than a SNMPv1 or SNMPv2c community string. In addition to community string, a particular range of source addresses can be used to restrict the source subnet.

Write Community

Indicates the community write-access string to permit access to the SNMP agent. The allowed string length is 0 to 255, and the allowed content is ASCII characters from 33 to 126.

The field is applicable only when the SNMP version is SNMPv1 or SNMPv2c. If the SNMP version is SNMPv3, the community string will be associated with the SNMPv3 communities table. It provides more flexibility to configure a security name than a SNMPv1 or SNMPv2c community string. In addition to community string, a particular range of source addresses can be used to restrict the source subnet.

Engine ID

Indicates the SNMPv3 engine ID. The string must contain an even number (in hexadecimal format) with the number of digits between 10 and 64 — but all zeros and all Fs are not allowed. Changes in the Engine ID will clear all original local users.

SNMP Trap Configuration

Configure SNMP trap on this page.

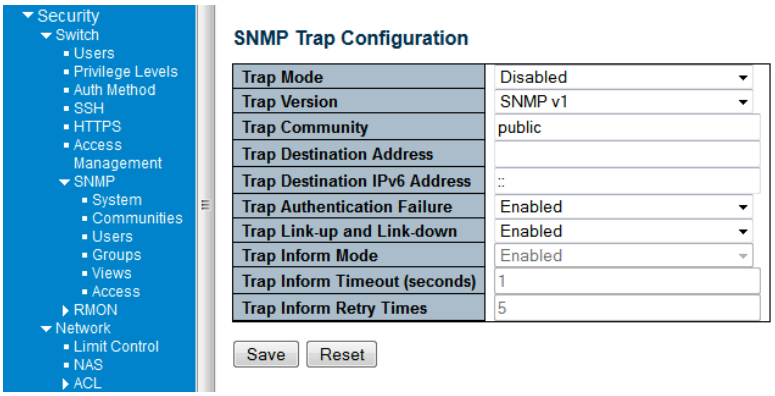

Trap Mode

Indicates the SNMP trap mode operation. Possible modes:
Enabled: Enable SNMP trap mode operation.
Disabled: Disable SNMP trap mode operation.

Trap Version

Indicates the SNMP trap-supported version. Possible versions:
SNMPv1: Set SNMP trap-supported version 1.
SNMPv2c: Set SNMP trap-supported version 2c.
SNMPv3: Set SNMP trap-supported version 3.

Trap Community

Indicates the community access string when sending an SNMP trap packet. The allowed string length is 0 to 255, and the allowed content is ASCII characters from 33 to 126.

Trap Destination Address

Indicates the SNMP trap destination address.

Trap Destination IPv6 Address

Provide the trap destination IPv6 address of this switch. The IPv6 address is in 128-bit records represented as eight fields of up to four hexadecimal digits with a colon separating each field (:). For example, “fe80::215:c5ff:fe03:4dc7: The symbol :: is a special syntax that can be used as a shorthand way of representing multiple 16-bit groups of contiguous zeros; but it can only appear once. It can also represent a legally valid IPv4 address. For example, “::192.1.2.34.”

Trap Authentication Failure

Indicates that the SNMP entity is permitted to generate authentication failure traps. Possible modes:
Enabled: SNMP trap authentication failure.
Disabled: Disable SNMP trap authentication failure.

Trap Link-up and Link-down

Indicates the SNMP trap link-up and link-down mode operation. Possible modes:
Enabled: Enable SNMP trap link-up and link-down mode operation.
Disabled: Disable SNMP trap link-up and link-down mode operation.

Trap Inform Mode

Indicates the SNMP trap inform mode operation. Possible modes:
Enabled: Enable SNMP trap inform mode operation.
Disabled: Disable SNMP trap inform mode operation.

Trap Inform Timeout (seconds)

Indicates the SNMP trap inform timeout. The allowed range is 0 to 2147.

Trap Inform Retry Times

Indicates the SNMP trap inform retry times. The allowed range is 0 to 255.

Trap Probe Security Engine ID

Indicates the SNMP trap probe security engine ID mode of operation. Possible values:
Enabled: Enable SNMP trap probe security engine ID mode of operation.
Disabled: Disable SNMP trap probe security engine ID mode of operation.

Trap Security Engine ID

Indicates the SNMP trap security engine ID. SNMPv3 sends traps and informs using USM for authentication and privacy. A unique engine ID for these traps and informs is needed. When "Trap Probe Security Engine ID" is enabled, the ID will be probed automatically. Otherwise, the ID specified in this field is used. The string must contain an even number (in hexadecimal format) with number of digits between 10 and 64, but all zeros and all Fs are not allowed.

Trap Security Name

Indicates the SNMP trap security name. SNMPv3 traps and informs using USM for authentication and privacy. A unique security name is needed when traps and informs are enabled.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

SNMPv3 Community Configuration

You can configure the SNMPv3 community table on this page:

The entry index key is Community.

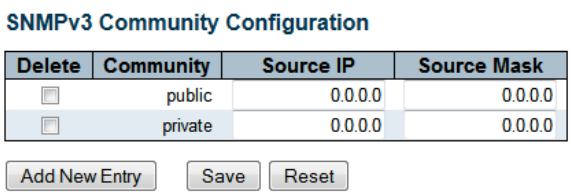

Delete

Check to delete the entry. It will be deleted during the next save.

Community

Indicates the community access string to permit access to the SNMPv3 agent. The allowed string length is 1 to 32, and the allowed content is ASCII characters from 33 to 126. The community string will be treated as a security name and map a SNMPv1 or SNMPv2c community string.

Source IP

Indicates the SNMP access source address. A particular range of source addresses can be used to restrict the source subnet when combined with a source mask.

Source Mask

Indicates the SNMP access source address mask.

Buttons

Add new community: Click to add a new community entry.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

SNMPv3 User Configuration

Configure the SNMPv3 user table on this page. The entry index keys are Engine ID and User Name.

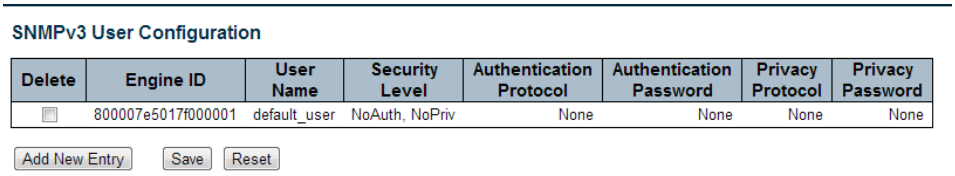

Delete

Check to delete the entry. It will be deleted during the next save.

Engine ID

An octet string identifying the engine ID that this entry should belong to. The string must contain an even number (in hexadecimal format) with the number of digits between 10 and 64, but all zeros and all Fs are not allowed. The SNMPv3 architecture uses the User-based Security Model (USM) for message security and the View-based Access Control Model (VACM) for access control. For the USM entry, the usm User Engine ID and usm User Name are the entry's keys. In a simple agent, the usm User Engine ID is always that agent's own snmp Engine ID value. The value can also take the value of the snmp Engine ID of a remote SNMP engine with which this user can communicate. In other words, if the user engine ID equals the system engine ID, then it is local user; otherwise, it's a remote user.

User Name

A string identifying the user name that this entry should belong to. The allowed string length is 1 to 32, and the allowed content is ASCII characters from 33 to 126.

Security Level

Indicates the security model that this entry should belong to. Possible security models:

NoAuth, NoPriv: No authentication and no privacy.

Auth, NoPriv: Authentication and no privacy.

Auth, Priv: Authentication and privacy.
The value of security level cannot be modified if entry already exists. That means it must first be ensured that the value is set correctly.

Authentication Protocol

Indicates the authentication protocol that this entry should belong to. Possible authentication protocols:
None: No authentication protocol.
MD5: An optional flag to indicate that this user uses MD5 authentication protocol.
SHA: An optional flag to indicate that this user uses SHA authentication protocol.
The value of the security level cannot be modified if an entry already exists. That means you must first ensure that the value is set correctly.

Authentication Password

A string identifying the authentication password phrase. For MD5 authentication protocol, the allowed string length is 8 to 32. For SHA authentication protocol, the allowed string length is 8 to 40. The allowed content is ASCII characters from 33 to 126.

Privacy Protocol

Indicates the privacy protocol that this entry should belong to. Possible privacy protocols:
None: No privacy protocol.
DES: An optional flag to indicate that this user uses DES authentication protocol.

Privacy Password

A string identifying the privacy password phrase. The allowed string length is 8 to 32, and the allowed content is ASCII characters from 33 to 126.

Buttons

Add new user: Click to add a new user entry.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

SNMPv3 Group Configuration

Configure the SNMPv3 group table on this page:

The entry index keys are Security Mode and Security Name.

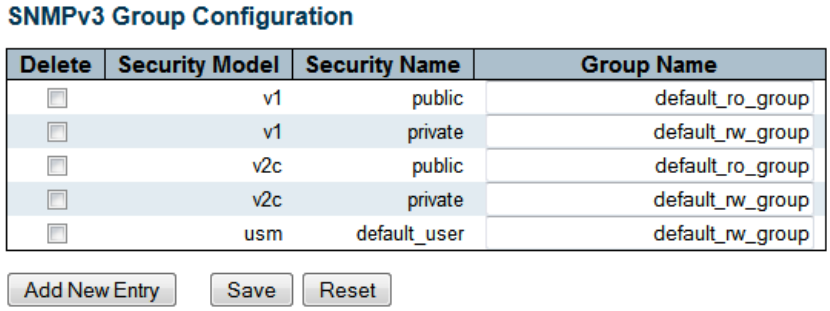

Delete

Check to delete the entry. It will be deleted during the next save.

Security Model

Indicates the security model that this entry should belong to. Possible security models:
v1: Reserved for SNMPv1.
v2c: Reserved for SNMPv2c.
usm: User-based Security Model (USM).

Security Name

A string identifying the security name that this entry should belong to. The allowed string length is 1 to 32, and the allowed content is ASCII characters from 33 to 126.

Group Name

A string identifying the group name that this entry should belong to. The allowed string length is 1 to 32, and the allowed content is ASCII characters from 33 to 126.

Buttons

Add new group: Click to add a new group entry.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

SNMPv3 View Configuration

Configure the SNMPv3 view table on this page.

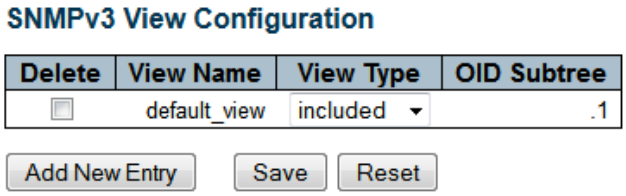

The entry index keys are **View Name** and **OID Sub-tree**.

Delete

Check to delete the entry. It will be deleted during the next save.

View Name

A string identifying the view name that this entry should belong to. The allowed string length is 1 to 32, and the allowed content is ASCII characters from 33 to 126.

View Type

Indicates the view type that this entry should belong to. Possible view types:

Included: An optional flag to indicate that this view sub-tree should be included.
Excluded: An optional flag to indicate that this view sub-tree should be excluded.
In general, if a view entry's view type is “excluded,” there should be another view entry existing with view type as “included,” and its OID sub-tree should overstep the “excluded” view entry.

OID Subtree

The OID defining the root of the sub-tree to add to the named view. The allowed OID length is 1 to 128. The allowed string content is digital number or asterisk (*).

Buttons

Add new view: Click to add a new view entry.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

SNMPv3 Access Configuration

Configure the SNMPv3 access table on this page. The entry index keys are Group Name, Security Model and Security Level.

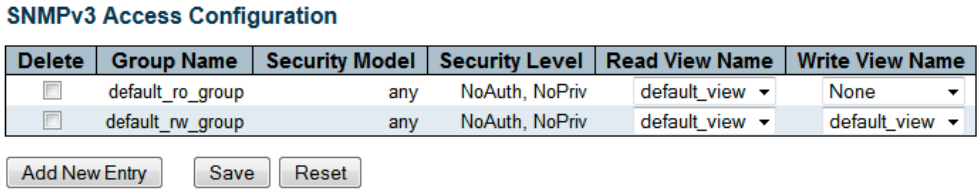

Delete

Check to delete the entry. It will be deleted during the next save.

Group Name

A string identifying the group name that this entry should belong to. The allowed string length is 1 to 32, and the allowed content is ASCII characters from 33 to 126.

Security Model

Indicates the security model that this entry should belong to. Possible security models:

Any: Any security model accepted(v1|v2c|usm).

V1: Reserved for SNMPv1.

V2c: Reserved for SNMPv2c.

Usm: User-based Security Model (USM).
Security Level : Indicates the security model that this entry should belong to.

Possible security models:

NoAuth, NoPriv: No authentication and no privacy.

Auth, NoPriv: Authentication and no privacy.

Auth, Priv: Authentication and privacy.

Read View Name

The name of the MIB view defining the MIB objects for which this request may request the current values. The allowed string length is 1 to 32, and the allowed content is ASCII characters from 33 to 126.

Write View Name

The name of the MIB view defining the MIB objects for which this request may potentially set new values. The allowed string length is 1 to 32, and the allowed content is ASCII characters from 33 to 126.

Buttons

Add new access: Click to add a new access entry.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.4.1.8 RMON Statistics Configuration

RMON is short for Remote Monitoring On Network. An RMON implementation typically operates in a client/server model. The monitoring device (probe) contains RMON software agents that collect information of the system and ports. The RMON software agent acts as a server, and the network management system (NMS) that communicate with it acts as a client. The RMON agent of the switch supports four groups: Statistics, History, Alarm and Event.

RMON Group	Function	Elements
Statistics	Contains statistics measured by the probe for each monitored interface on this device. Real-time LAN statistics; e.g., utilization, collisions, CRC errors	Packets dropped, packets sent, bytes sent (octets), broadcast packets, multicast packets, CRC errors, undersize packets, oversize packets, fragments, jabbers, collisions and counters for packets ranging from 64, 65 to 127, 128 to 255, 256 to 511, 512 to 1023, and 1024 to 1518 bytes.
History	Records periodic statistical samples from a network and stores for retrieval.	History of above Statistics.
Alarm	Definitions for RMON SNMP traps to be sent when statistics exceed defined thresholds.	Interval for sampling, particular variable, sample type, value of statistics during the last sampling period, startup alarm, rising threshold, rising index, falling threshold, falling index.
Events	Controls the generation and notification of events from this device.	Event index, log index, event log time, event description.

The NMS can get the above information through remote polling. The information from the switch can be collected, analyzed and displayed as a table, graphic, etc.

RMON Statistics Configuration

Configure the RMON Statistics table on this page. The entry index key is **ID.**

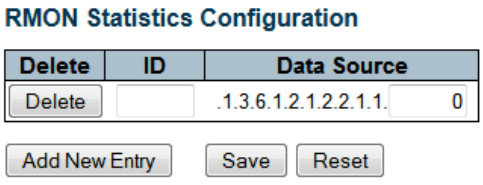

Delete

Check to delete the entry. It will be deleted during the next save.

ID

Indicates the index of the entry. The range is from 1 to 65535.

Data Source

Indicates the port ID to be monitored. If in a stacked switch, the value must add 1000* (switch ID-1); for example, if the port is switch 3 port 5, the value is 2005

Buttons

Add new entry: Click to add a new community entry.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

RMON History Configuration

Configure the RMON History table on this page. The entry index key is ID**.**

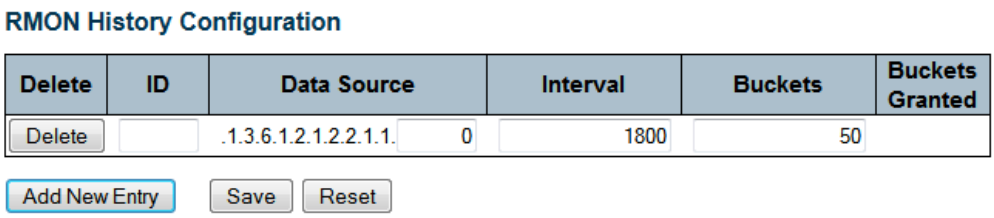

Delete

Check to delete the entry. It will be deleted during the next save.

ID

Indicates the index of the entry. The range is from 1 to 65535.

Data Source

Indicates the port ID to be monitored. If in a stacked switch, the value must add 1000* (switch ID-1); for example, if the port is switch 3 port 5, the value is 2005.

Interval

Indicates the interval in seconds for sampling the history statistics data. The range is from 1 to 3600; the default value is 1800 seconds.

Buckets

Indicates the maximum data entries associated with this History entry stored in RMON. The range is from 1 to 3600; the default value is 50.

Buckets Granted

The number of data shall be saved in the RMON.

Buttons

Add new entry: Click to add a new community entry.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

RMON Alarm Configuration

Configure the RMON Alarm table on this page. The entry index key is ID.



Delete

Check to delete the entry. It will be deleted during the next save.

ID

Indicates the index of the entry. The range is from 1 to 65535.

Interval

Indicates the interval in seconds for sampling and comparing the rising and falling threshold. The range is from 1 to 65535.

Variable

Indicates the particular variable to be sampled. The possible variables:

InOctets: The total number of octets received on the interface, including framing characters.

InUcastPkts: The number of unicast packets delivered to a higher-layer protocol.

InNUcastPkts: The number of broadcast and multicast packets delivered to a higher-layer protocol.

InDiscards: The number of inbound packets that are discarded even when the packets are normal.

InErrors: The number of inbound packets that contained errors preventing them from being deliverable to a higher-layer protocol.

InUnknownProtos: The number of the inbound packets that were discarded because of unknown or unsupported protocols.

OutOctets: The number of octets transmitted out of the interface, including framing characters.

OutUcastPkts: The number of unicast packets that request to transmit.

OutNUcastPkts: The number of broadcast and multicast packets that request to transmit.

OutDiscards: The number of outbound packets that are discarded even when the packets are normal.

OutErrors: The number of outbound packets that could not be transmitted because of errors.

OutQlen: The length of the output packet queue (in packets).

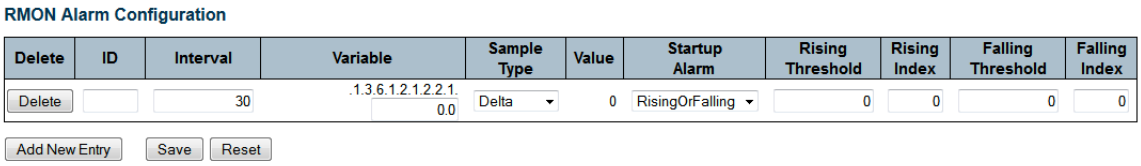

Sample Type

The method of sampling the selected variable and calculating the value to be compared against the thresholds. Possible sample types:

Absolute: Get the sample directly.
Delta: Calculate the difference between samples (default).

Value

The value of the statistic during the last sampling period.

Startup Alarm

The method of sampling the selected variable and calculating the value to be compared against the thresholds. Possible sample types:

Rising: Trigger alarm when the first value is larger than the rising threshold.

Falling: Trigger alarm when the first value is less than the falling threshold.

RisingOrFalling: Trigger alarm when the first value is larger than the rising threshold or less than the falling threshold (default).

Rising Threshold

Rising threshold value (-2147483648 – 2147483647).

Rising Index

Rising event index (1 – 65535).

Falling Threshold

Falling threshold value (-2147483648 – 2147483647)

Falling Index

Falling event index (1 – 65535).

Buttons

Add new entry: Click to add a new community entry.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

RMON Event Configuration

Configure the RMON Event table on this page. The entry index key is ID.



Delete

Check to delete the entry. It will be deleted during the next save.

ID

Indicates the index of the entry. The range is from 1 to 65535.

Desc

Indicates this event, the string length is from 0 to 127; the default is a null string.

Type

Indicates the notification of events. Possible types:

None: The total number of octets received on the interface, including framing characters.

Log: The number of unicast packets delivered to a higher-layer protocol.

Snmptrap: The number of broadcast and multicast packets delivered to a higher-layer protocol.

Logandtrap: The number of inbound packets that are discarded even when the packets are normal.

community

Specify the community when a trap is sent. The string length is from 0 to 127, the default is "public."

Event Last Time

Indicates the value of sysUp Time at the time this event entry last generated an event.

Buttons

Add new entry: Click to add a new community entry.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.4.2 Security /Network

4.4.2.1 Port Security Limit Control Configuration

This page allows you to configure the Port Security Limit Control system and port settings.

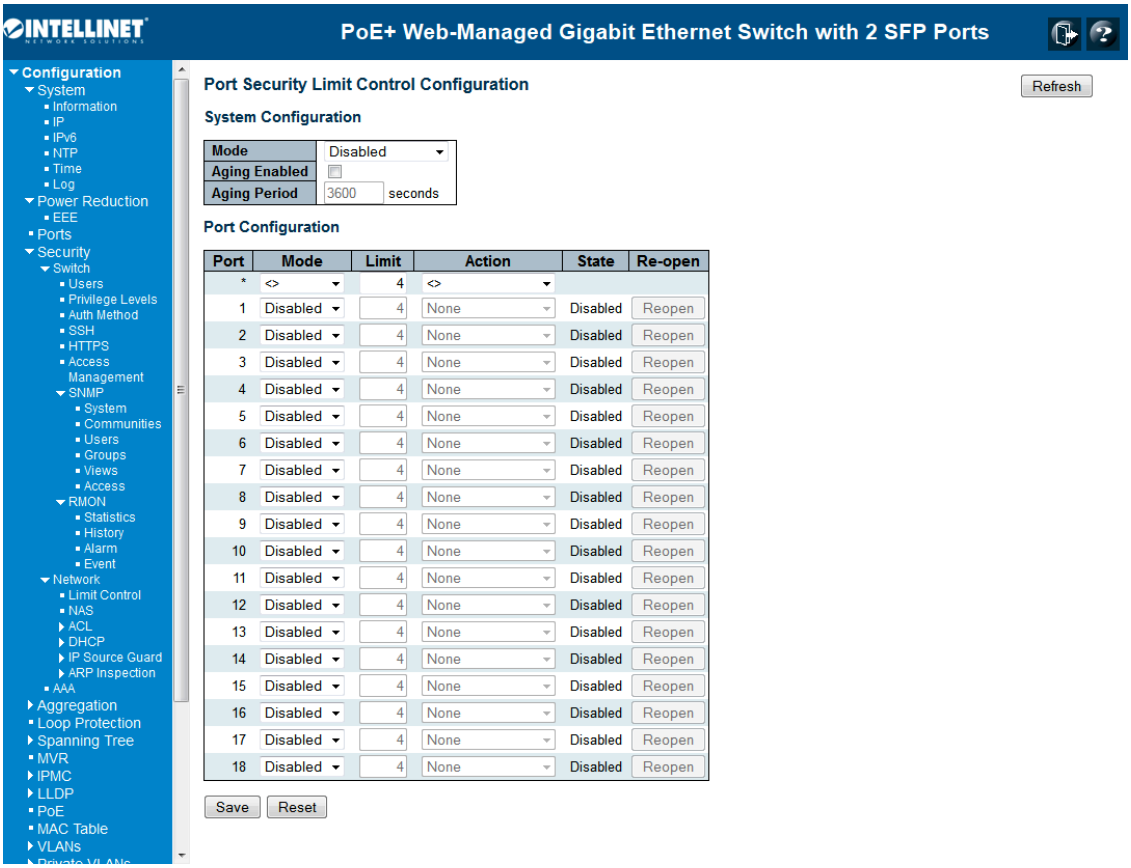

Limit Control allows for limiting the number of users on a given port. A user is identified by a MAC address and VLAN ID. If Limit Control is enabled on a port, the limit specifies the maximum number of users on the port. If this number is exceeded, an action is taken. The action can be one of the four different actions as described below.
The Limit Control module utilizes a lower-layer module, Port Security module, which manages MAC addresses learned on the port.

The Limit Control configuration consists of two sections: systemwide and portwide.

System Configuration

Mode

Indicates if Limit Control is globally enabled or disabled on the switch. If globally disabled, other modules may still use the underlying functionality, but limit checks and corresponding actions are disabled.

Aging Enabled

If checked, secured MAC addresses are subject to aging as discussed under Aging Period.

Aging Period

If Aging Period is checked, then the aging period is controlled with this input. If other modules are using the underlying port security for securing MAC addresses, they may have other requirements to the aging period. The underlying port security will use the shorter requested aging period of all modules that use the functionality.
The Aging Period can be set to a number between 10 and 10,000,000 seconds.
To understand why aging may be desired, consider the following scenario: Suppose an end-host is connected to a third-party switch or hub, which in turn is connected to a port on this switch on which Limit Control is enabled. The end-host will be allowed to forward if the limit is not exceeded. Now suppose that the end-host logs off or powers down. If it weren't for aging, the end-host would still take up resources on this switch and would be allowed to forward. To overcome this situation, enable aging. With aging enabled, a timer is started once the end-host gets secured. When the timer expires, the switch starts looking for frames from the end-host, and if such frames are not seen within the next Aging Period, the end-host is assumed to be disconnected, and the corresponding resources are freed up on the switch.

Port Configuration

The table allows you to configure the Port Configuration parameters:

Port

The port number to which the configuration below applies.

Mode

Controls whether Limit Control is enabled on this port. Both this and the Global Mode must be set to Enabled for Limit Control to be in effect. Notice that other modules may still use the underlying port security features without enabling Limit Control on a given port.

Limit

The maximum number of MAC addresses that can be secured on this port. This number cannot exceed 1024. If the limit is exceeded, the corresponding action is taken.
The switch is "born" with a total number of MAC addresses from which all ports draw whenever a new MAC address is seen on a Port Security-enabled port. Since all ports draw from the same pool, it may happen that a configured maximum cannot be granted, if the remaining ports have already used all available MAC addresses.

Action

If Limit is reached, the switch can take one of the following actions:

None: Do not allow more than Limit MAC addresses on the port, but take no further action.

Trap: If Limit+ 1 MAC addresses is seen on the port, send an SNMP trap. If Aging is disabled, only one SNMP trap will be sent, but with Aging enabled, new SNMP traps will be sent every time the limit gets exceeded.

Shutdown: If Limit + 1 MAC addresses is seen on the port, shut down the port. This implies that all secured MAC addresses will be removed from the port, and no new address will be learned. Even if the link is physically disconnected and reconnected on the port (by disconnecting the cable), the port will remain shut down. There are three ways to re-open the port:
1) Boot the switch
2) Disable and re-enable Limit Control on the port or the switch
3) Click the Reopen button

Trap & Shutdown: If Limit + 1 MAC addresses is seen on the port, both the "Trap" and the "Shutdown" actions described above will be taken.

State

This column shows the current state of the port as seen from the Limit Control's point of view. The state takes one of four values:

Disabled: Limit Control is either globally disabled or disabled on the port.

Ready: The limit is not yet reached. This can be shown for all actions.

Limit Reached: Indicates that the limit is reached on this port. This state can only be shown if Action is set to **None** or **Trap**.

Shutdown: Indicates that the port is shut down by the Limit Control module. This state can only be shown if Action is set to **Shutdown** or **Trap & Shutdown**.

Re-open Button

If a port is shut down by this module, you may reopen it by clicking this button, which will only be enabled if this is the case. For other methods, refer to **Shutdown** in the Action section.
Note that clicking the reopen button causes the page to be refreshed, so non-committed changes will be lost.

Buttons

Refresh: Click to refresh the page. Note that non-committed changes will be lost.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.4.2.2 Security / Network / Network Access Server Configuration

This page allows you to configure the IEEE802.1X and MAC-based authentication system and port settings.

Network Access Server Configuration

System Configuration

Mode	Disabled
Reauthentication Enabled	
Reauthentication Period	3600 seconds
EAPOL Timeout	30 seconds
Aging Period	300 seconds
Hold Time	10 seconds
RADIUS-Assigned QoS Enabled	
RADIUS-Assigned VLAN Enabled	
Guest VLAN Enabled	
Guest VLAN ID	1
Max. Reauth. Count	2
Allow Guest VLAN if EAPOL Seen	

Port Configuration for Switch 1

Port	Admin State	RADIUS-Assigned QoS Enabled	RADIUS-Assigned VLAN Enabled	Guest VLAN Enabled	Port State	Restart
*	<>					
1	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
2	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
3	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
4	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
5	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
6	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
7	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
8	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
9	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
10	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
11	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
12	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
13	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
14	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
15	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
16	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
17	Force Authorized				Globally Disabled	Reauthenticate Reinitialize
18	Force Authorized				Globally Disabled	Reauthenticate Reinitialize

Save Reset

The IEEE 802.1X standard defines a port-based access control procedure that prevents unauthorized access to a network by requiring users to first submit credentials for authentication. One or more central servers, the backend servers, determine whether the user is allowed access to the network. These backend (RADIUS) servers are configured on the "Configuration→Security→AAA" page. The IEEE802.1X standard defines port-based operation, but non-standard variants overcome security limitations as shall be explored below.

MAC-based authentication allows for authentication of more than one user on the same port, and doesn't require the user to have special 802.1X supplicant software installed on his system. The switch uses the user's MAC address to authenticate against the backend server. Intruders can create counterfeit MAC addresses, which makes MAC-based authentication less secure than 802.1X authentication.

The NAS configuration consists of two sections: systemwide and portwide.

System Configuration

Mode

Indicates if NAS is globally enabled or disabled on the switch. If globally disabled, all ports are allowed forwarding of frames.

Reauthentication Enabled

If checked, successfully authenticated supplicants/clients are reauthenticated after the interval specified by the Reauthentication Period. Reauthentication for 802.1X-enabled ports can be used to detect if a new device is plugged into a switch port or if a supplicant is no longer attached.

For MAC-based ports, reauthentication is only useful if the RADIUS server configuration has changed. It does not involve communication between the switch and the client, and therefore doesn't imply that a client is still present on a port (see Aging Period below).

Reauthentication Period

Determines the period, in seconds, after which a connected client must be reauthenticated. This is only active if the Reauthentication Enabled checkbox is checked. Valid values are in the range 1 to 3600 seconds.

EAPOL Timeout

Determines the time for retransmission of Request Identity EAPOL frames.
Valid values are in the range 1 to 65535 seconds. This has no effect for MAC-based ports.

Aging Period

This setting applies to the following modes; i.e., modes using the Port Security functionality to secure MAC addresses:
• Single 802.1X
• Multi 802.1X
• MAC-Based Auth.
When the NAS module uses the Port Security module to secure MAC addresses, the Port Security module needs to check for activity on the MAC address in question at regular intervals and free resources if no activity is seen within a given period of time. This parameter controls exactly this period and can be set to a number between 10 and 1000000 seconds.
If reauthentication is enabled and the port is in an 802.1X-based mode, this is not so critical, since supplicants that are no longer attached to the port will get removed upon the next reauthentication, which will fail. But if reauthentication is not enabled, the only way to free resources is by aging the entries.
For ports in MAC-based Auth. mode, reauthentication doesn't cause direct communication between the switch and the client, so this will not detect whether the client is still attached or not, and the only way to free any resources is to age the entry.

Hold Time

This setting applies to the following modes; i.e., modes using the Port Security functionality to secure MAC addresses:
• Single 802.1X
• Multi 802.1X
• MAC-Based Auth.
If a client is denied access — either because the RADIUS server denies the client access or because the RADIUS server request times out (according to the timeout specified on the "Configuration→Security→ AAA" page) — the client is put on hold in the Unauthorized state. The hold timer does not count during an ongoing authentication.
In MAC-based Auth. mode, the switch will ignore new frames coming from the client during the hold time. The Hold Time can be set to a number between 10 and 1000000 seconds.

RADIUS-Assigned QoS Enabled

RADIUS-assigned QoS provides a means to centrally control the traffic class to which traffic coming from a successfully authenticated supplicant is assigned on the switch. The RADIUS server must be configured to transmit special RADIUS attributes to take advantage of this feature (see RADIUS-Assigned QoS Enabled below for a detailed description).
The "RADIUS-Assigned QoS Enabled" checkbox provides a quick way to globally enable/disable RADIUS server-assigned QoS Class functionality. When checked, the individual ports' ditto setting determine whether RADIUS-assigned QoS Class is enabled on that port. When unchecked, RADIUS-server assigned QoS Class is disabled on all ports.

RADIUS-Assigned VLAN Enabled

RADIUS-assigned VLAN provides a means to centrally control the VLAN on which a successfully authenticated supplicant is placed on the switch. Incoming traffic will be classified to and switched on the RADIUS-assigned VLAN. The RADIUS server must be configured to transmit special RADIUS attributes to take advantage of this feature (see RADIUS-Assigned VLAN Enabled below for a detailed description).

The "RADIUS-Assigned VLAN Enabled" checkbox provides a quick way to globally enable/disable RADIUS-server assigned VLAN functionality. When checked, the individual ports' ditto setting determine whether RADIUS-assigned VLAN is enabled on that port. When unchecked, RADIUS-server assigned VLAN is disabled on all ports.

Guest VLAN Enabled

A Guest VLAN is a special VLAN — typically with limited network access — on which 802.1X-unaware clients are placed after a network administrator-defined timeout. The switch follows a set of rules for entering and leaving the Guest VLAN as listed below.

The "Guest VLAN Enabled" checkbox provides a quick way to globally enable/disable Guest VLAN functionality. When checked, the individual ports' ditto setting determines whether the port can be moved into Guest VLAN. When unchecked, the ability to move to the Guest VLAN is disabled on all ports.

Guest VLAN ID

This is the value that a port's Port VLAN ID is set to if a port is moved into the Guest VLAN. It is only changeable if the Guest VLAN option is globally enabled.
Valid values are in the range 1-4095.

Max. Reauth. Count

The number of times the switch transmits an EAPOL Request Identity frame without response before considering entering the Guest VLAN is adjusted with this setting. The value can only be changed if the Guest VLAN option is globally enabled.
Valid values are in the range 1-255.

Allow Guest VLAN if EAPOL Seen

The switch remembers if an EAPOL frame has been received on the port for the lifetime of the port. Once the switch considers whether to enter the Guest VLAN, it will first check if this option is enabled or disabled. If disabled (unchecked; default), the switch will only enter the Guest VLAN if an EAPOL frame has not been received on the port for the lifetime of the port. If enabled (checked), the switch will consider entering the Guest VLAN even if an EAPOL frame has been received on the port for the lifetime of the port.
The value can only be changed if the Guest VLAN option is globally enabled.

Port Configuration

The table has a number of columns that allow you to configure the port mode based on the IEEE 802.1X standard. Select the port and configure the settings.

Port

The port number for which the configuration below applies.

Admin State

If NAS is globally enabled, this selection controls the port's authentication mode. The following modes are available:

Force Authorized

In this mode, the switch will send one EAPOL Success frame when the port link comes up, and any client on the port will be allowed network access without authentication.

Force Unauthorized

In this mode, the switch will send one EAPOL Failure frame when the port link comes up, and any client on the port will be disallowed network access.

Port-based 802.1X

In the 802.1X world, the user is called the supplicant, the switch is the authenticator, and the RADIUS server is the authentication server. The authenticator acts as the man in the middle, forwarding requests and responses between the supplicant and the authentication server. Frames sent between the supplicant and the switch are special 802.1X frames, known as EAPOL (EAP Over LANs) frames.

EAPOL frames encapsulate EAP PDUs (RFC3748). Frames sent between the switch and the RADIUS server are RADIUS packets. RADIUS packets also encapsulate EAP PDUs together with other attributes like the switch's IP address, name and the supplicant's port number on the switch. EAP is very flexible, in that it allows for different authentication methods, like MD5-CHALLENGE, PEAP and TLS. The important thing is that the authenticator (the switch) doesn't need to know which authentication method the supplicant and the authentication server are using, or how many information exchange frames are needed for a particular method. The switch simply encapsulates the EAP part of the frame into the relevant type (EAPOL or RADIUS) and forwards it.
When authentication is complete, the RADIUS server sends a special packet containing a success or failure indication. Besides forwarding this decision to the supplicant, the switch uses it to open up or block traffic on the switch port connected to the supplicant.

Note: Suppose two backend servers are enabled and that the server timeout is configured to X seconds (using the AAA configuration page), and suppose that the first server in the list is currently down (but not considered dead). Now, if the supplicant retransmits EAPOL Start frames at a rate faster than X seconds, then it will never get authenticated, because the switch will cancel ongoing backend authentication server requests whenever it receives a new EAPOL Start frame from the supplicant. And since the server hasn't yet failed (because the X seconds haven't expired), the same server will be contacted upon the next backend authentication server request from the switch. This scenario will loop forever. Therefore, the server timeout should be smaller than the supplicant's EAPOL Start frame retransmission rate.

Single 802.1X

In port-based 802.1X authentication, once a supplicant is successfully authenticated on a port, the whole port is opened for network traffic. This allows other clients connected to the port (for instance, through a hub) to piggy-back on the successfully authenticated client and get network access even though they really aren't authenticated. To overcome this security breach, use the Single 802.1X variant.
Single 802.1X is really not an IEEE standard, but features many of the same characteristics as does port-based 802.1X. In Single 802.1X, at most one supplicant can get authenticated on the port at a time.

Normal EAPOL frames are used in the communication between the supplicant and the switch. If more than one supplicant is connected to a port, the one that comes first when the port's link comes up will be the first one considered. If that supplicant doesn't provide valid credentials within a certain amount of time, another supplicant will get a chance. Once a supplicant is successfully authenticated, only that supplicant will be allowed access. This is the most secure of all the supported modes. In this mode, the Port Security module is used to secure a supplicant's MAC address once successfully authenticated.

Multi 802.1X

Multi 802.1X is — like Single 802.1X — not an IEEE standard, but a variant that features many of the same characteristics. In Multi 802.1X, one or more supplicants can get authenticated on the same port at the same time. Each supplicant is authenticated individually and secured in the MAC table using the Port Security module.
In Multi 802.1X, it is not possible to use the multicast BPDU MAC address as a destination MAC address for EAPOL frames sent from the switch toward the supplicant, since that would cause all supplicants attached to the port to reply to requests sent from the switch. Instead, the switch uses the supplicant's MAC address, which is obtained from the first EAPOL Start or EAPOL Response Identity frame sent by the supplicant. An exception to this is when no supplicants are attached. In this case, the switch sends EAPOL Request Identity frames using the BPDU multicast MAC address as destination to wake up any supplicants that might be on the port.
The maximum number of supplicants that can be attached to a port can be limited using the Port Security Limit Control functionality.

MAC-based Auth.

Unlike port-based 802.1X, MAC-based authentication is not a standard, but merely a best-practices method adopted by the industry. In MAC-based authentication, users are called clients, and the switch acts as the supplicant on behalf of clients. The initial frame (any kind of frame) sent by a client is snooped by the switch, which in turn uses the client's MAC address as both username and password in the subsequent EAP exchange with the RADIUS server. The 6-byte MAC address is converted to a string on the following form "xx-xx-xx-xx-xx-xx", that is, a dash (-) is used as separator between the lower-cased hexadecimal digits. The switch only supports the MD5-Challenge authentication method, so the RADIUS server must be configured accordingly.
When authentication is complete, the RADIUS server sends a success or failure indication, which in turn causes the switch to open up or block traffic for that particular client, using the Port-Security module. Only then will frames from the client be forwarded on the switch. There are no EAPOL frames involved in this authentication, and therefore, MAC-based Authentication has nothing to do with the 802.1X standard.
The advantage of MAC-based authentication over 802.1X-based authentication is that the clients don't need special supplicant software to authenticate. The disadvantage is that MAC addresses can be spoofed by malicious users — equipment whose MAC address is a valid RADIUS user can be used by anyone. Also, only the MD5-Challenge method is supported. The maximum number of clients that can be attached to a port can be limited using the Port Security Limit Control functionality.

RADIUS-Assigned QoS Enabled

When RADIUS-Assigned QoS is both globally enabled and enabled (checked) on a given port, the switch reacts to QoS Class information carried in the RADIUS Access-Accept packet transmitted by the RADIUS server when a supplicant is successfully authenticated. If present and valid, traffic received on the supplicant's port will be classified to the given QoS Class. If (re-)authentication fails or the RADIUS Access-Accept packet no longer carries a QoS Class or it's invalid, or the supplicant is otherwise no longer present on the port, the port's QoS Class is immediately reverted to the original QoS Class (which may be changed by the administrator in the meantime without affecting the RADIUS-assigned).
This option is only available for single-client modes; that is:
• Port-based 802.1X
• Single 802.1X0

RADIUS attributes used in identifying a QoS Class:
The User-Priority-Table attribute defined in RFC4675 forms the basis for identifying the QoS Class in an Access-Accept packet.
Only the first occurrence of the attribute in the packet will be considered, and to be valid, it must follow

this rule:
• All 8 octets in the attribute's value must be identical and consist of ASCII characters in the range 0-3, which translates into the desired QoS Class in the range 0-3.

RADIUS-Assigned VLAN Enabled

When RADIUS-Assigned VLAN is both globally enabled and enabled (checked) for a given port, the switch reacts to VLAN ID information carried in the RADIUS Access-Accept packet transmitted by the RADIUS server when a supplicant is successfully authenticated. If present and valid, the port's Port VLAN ID will be changed to this VLAN ID, the port will be set to be a member of that VLAN ID, and the port will be forced into VLAN unaware mode. Once assigned, all traffic arriving on the port will be classified and switched on the RADIUS-assigned VLAN ID.
If (re-)authentication fails or the RADIUS Access-Accept packet no longer carries a VLAN ID or it's invalid, or the supplicant is otherwise no longer present on the port, the port's VLAN ID is immediately reverted to the original VLAN ID (which may be changed by the administrator in the meanwhile without affecting the RADIUS-assigned).
This option is only available for single-client modes; that is:
• Port-based 802.1X
• Single 802.1X
For troubleshooting VLAN assignments, use the "Monitor→VLANs→VLAN Membership and VLAN Port" pages. These pages show which modules have (temporarily) overridden the current Port VLAN configuration.

RADIUS attributes used in identifying a VLAN ID:
RFC2868 and RFC3580 form the basis for the attributes used in identifying a VLAN ID in an Access-Accept packet. The following criteria are used:
• The Tunnel-Medium-Type, Tunnel-Type and Tunnel-Private-Group-IDattributes must all be present at least once in the Access-Accept packet.
• The switch looks for the first set of these attributes that have the same Tag value and fulfill the following requirements (if Tag == 0 is used, the Tunnel-Private-Group-ID does not need to include a Tag):
- Value of Tunnel-Medium-Type must be set to "IEEE-802" (ordinal 6).
- Value of Tunnel-Type must be set to "VLAN" (ordinal 13).
- Value of Tunnel-Private-Group-ID must be a string of ASCII chars in the range 0-9, which is interpreted as a decimal string representing the VLAN ID. Leading 0s are discarded. The final value must be in the range 1-4095.

Guest VLAN Enabled

When Guest VLAN is both globally enabled and enabled (checked) for a given port, the switch considers moving the port into the Guest VLAN according to the rules outlined below.
This option is only available for EAPOL-based modes; that is:
• Port-based 802.1X
• Single 802.1X
• Multi 802.1X
For troubleshooting VLAN assignments, use the "Monitor→VLANs→VLAN Membership and VLAN Port" pages. These pages show which modules have (temporarily) overridden the current Port VLAN configuration.

Guest VLAN Operation:
When a Guest VLAN-enabled port's link comes up, the switch starts transmitting EAPOL Request Identity frames. If the number of transmissions of such frames exceeds Max,. Reauth., Count and no EAPOL frames have been received in the meantime, the switch considers entering the Guest VLAN. The interval between transmission of EAPOL Request Identity frames is configured with EAPOL Timeout. If “Allow Guest VLAN if EAPOL Seen” is enabled, the port will now be placed in the Guest VLAN. If disabled, the switch will first check its history to see if an EAPOL frame has previously been received on the port (this history is cleared if the port link goes down or the port's Admin State is changed), and if not, the port will be placed in the Guest VLAN. Otherwise, it will not move to the Guest VLAN, but continue transmitting EAPOL Request Identity frames at the rate given by EAPOL Timeout.
Once in the Guest VLAN, the port is considered authenticated, and all attached clients on the port are

allowed access on this VLAN. The switch will not transmit an EAPOL Success frame when entering the Guest VLAN.
While in the Guest VLAN, the switch monitors the link for EAPOL frames, and if one such frame is received, the switch immediately takes the port out of the Guest VLAN and starts authenticating the supplicant according to the port mode. If an EAPOL frame is received, the port will never be able to go back into the Guest VLAN if the "Allow Guest VLAN if EAPOL Seen" is disabled.

Port State

The current state of the port. It can undertake one of the following values:
Globally Disabled: NAS is globally disabled.
Link Down: NAS is globally enabled, but there is no link on the port.
Authorized: The port is in Force Authorized or a single-supplicant mode and the supplicant is authorized.
Unauthorized: The port is in Force Unauthorized or a single-supplicant mode and the supplicant is not successfully authorized by the RADIUS server.
X Auth/Y Unauth: The port is in a multi-supplicant mode. Currently X clients are authorized and Y are unauthorized.

Restart

Two buttons are available for each row. The buttons are only enabled when authentication is globally enabled and the port's Admin State is in an EAPOL-based or MAC-based mode.
Clicking these buttons will not cause settings changed on the page to take effect.
Reauthenticate: Schedules a reauthentication whenever the quiet-period of the port runs out (EAPOL-based authentication).For MAC-based authentication, reauthentication will be attempted immediately.
The button only has effect for successfully authenticated clients on the port and will not cause the clients to get temporarily unauthorized.
Reinitialize: Forces a reinitialization of the clients on the port and thereby a reauthentication immediately. The clients will transfer to the unauthorized state while the reauthentication is in progress.

Buttons

Refresh: Click to refresh the page.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.4.2.3 Security / Network / Access Control List Configuration

Configure the ACL parameters (ACE) of each switch port. These parameters will affect frames received on a port unless the frame matches a specific ACE.

ACL Ports Configuration for Switch 1

Port	Policy ID	Action	Rate Limiter ID	Port Redirect	Mirror	Logging	Shutdown	State	Counter
*	0	<>	<>	Disabled Port 1 Port 2	<>	<>	<>	<>	*
1	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
2	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
3	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	5290
4	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
5	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
6	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
7	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
8	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
9	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
10	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
11	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
12	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
13	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
14	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
15	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
16	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
17	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0
18	0	Permit	Disabled	Disabled Port 1 Port 2	Disabled	Disabled	Disabled	Enabled	0

Save Reset

The settings relate to the currently selected stack unit, as reflected by the page header.

Port

The logical port for the settings contained in the same row.

Policy ID

Select the policy to apply to this port. The allowed values are **0** through **255**. The default value is 0.

Action

Select whether forwarding is permitted ("Permit") or denied ("Deny"). The default value is "Permit."

Rate Limiter ID

Select which rate limiter to apply on this port. The allowed values are **Disabled** or the values **1** through **16**. The default value is "Disabled."

Disabled Port Copy

Select which port frames are copied on. The allowed values are **Disabled** or a specific port number. The default value is "Disabled."

Mirror

Specify the mirror operation of this port. The allowed values:
Enabled: Frames received on the port are mirrored.
Disabled: Frames received on the port are not mirrored.
The default value is "Disabled."

Logging

Specify the logging operation of this port. The allowed values:
Enabled: Frames received on the port are stored in the System Log.
Disabled : Frames received on the port are not logged.
The default value is "Disabled." Note that the System Log memory size and logging rate are limited.

Shutdown

Specify the port shut-down operation of this port. The allowed values:
Enabled: If a frame is received on the port, the port will be disabled.
Disabled: Port shut down is disabled.
The default value is "Disabled."

Counter

Counts the number of frames that match this ACE.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Refresh: Click to refresh the page. Any changes made locally will be undone.

Clear: Click to clear the counter.

ACL Rate Limiters Configuration

Configure the rate limiter for the ACL of the switch.

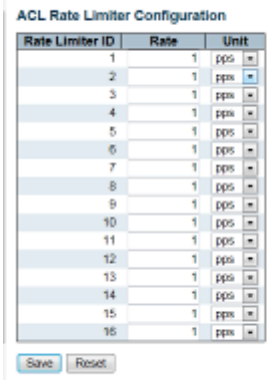

Rate Limiter ID

The rate limiter ID for the settings contained in the same row.

Rate

The allowed values are: **0-3276700** in pps.

Or **0,100,200,300,…,1000000** in kbps.

Unit

Specify the rate unit. The allowed values:
pps: packets per second.
kbps: kbits per second.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Access Control List Configuration

This page shows the Access Control List (ACL), which is made up of the ACEs defined on this switch. Each row describes the ACE that is defined. The maximum number of ACEs is **256** on each switch.



Click on the lowest plus sign to add a new ACE to the list. The reserved ACEs used for internal protocol, cannot be edited or deleted, the order sequence cannot be changed and the priority is highest.

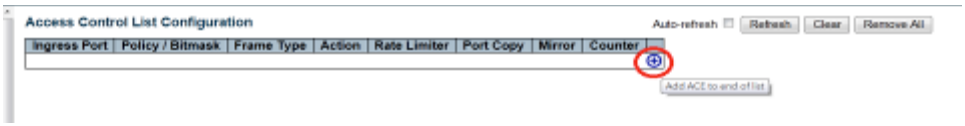

Ingress Port

Indicates the ingress port of the ACE. Possible values:
All: The ACE will match all ingress port.
Port: The ACE will match a specific ingress port.

Policy / Bitmask

Indicates the policy number and bitmask of the ACE.

Frame Type

Indicates the frame type of the ACE. Possible values:

Any: The ACE will match any frame type.

EType: The ACE will match Ethernet Type frames. Note that an Ethernet Type-based ACE will not get matched by IP and ARP frames.

ARP: The ACE will match ARP/RARP frames.

IPv4: The ACE will match all IPv4 frames.
IPv4/ICMP: The ACE will match IPv4 frames with ICMP protocol.
IPv4/UDP: The ACE will match IPv4 frames with UDP protocol.
IPv4/TCP: The ACE will match IPv4 frames with TCP protocol.
IPv4/Other: The ACE will match IPv4 frames, which are not ICMP/UDP/TCP.

IPv6: The ACE will match all IPv6 standard frames.

Action

Indicates the forwarding action of the ACE.

Permit:: Frames matching the ACE may be forwarded and learned.

Deny: Frames matching the ACE are dropped.

Rate Limiter

Indicates the rate limiter number of the ACE. The allowed range is **1** to **16**. When **Disabled** is displayed, the rate limiter operation is disabled.

Port Copy

Indicates the port copy operation of the ACE. Frames matching the ACE are copied to the port number. The allowed values are **Disabled** or a specific port number. When **Disabled** is displayed, the port copy operation is disabled.

Mirror

Specify the mirror operation of this port. Frames matching the ACE are mirrored to the destination mirror port. The allowed values:
Enabled: Frames received on the port are mirrored.
Disabled: Frames received on the port are not mirrored.
The default value is "Disabled."

Counter

The counter indicates the number of times the ACE was hit by a frame.

Modification Buttons

You can modify each ACE (Access Control Entry) in the table using the following buttons:

: Inserts a new ACE before the current row.

: Edits the ACE row.

: Moves the ACE up the list.

: Moves the ACE down the list.

: Deletes the ACE.

: The lowest plus sign adds a new entry at the bottom of the ACE listings.

Buttons

Auto-refresh: Check this box to refresh the page automatically. Automatic refresh occurs at regular intervals.

Refresh: Click to refresh the page. Note that non-committed changes will be lost.

Clear: Click to clear the counter

Remove All: Click to remove all ACEs

ACE Configuration

Configure an ACE (Access Control Entry) on this page.

An ACE consists of several parameters. These parameters vary according to the frame type that you select. First select the ingress port for the ACE, and then select the frame type. Different parameter options are displayed depending on the frame type selected.

A frame that hits this ACE matches the configuration that is defined here.

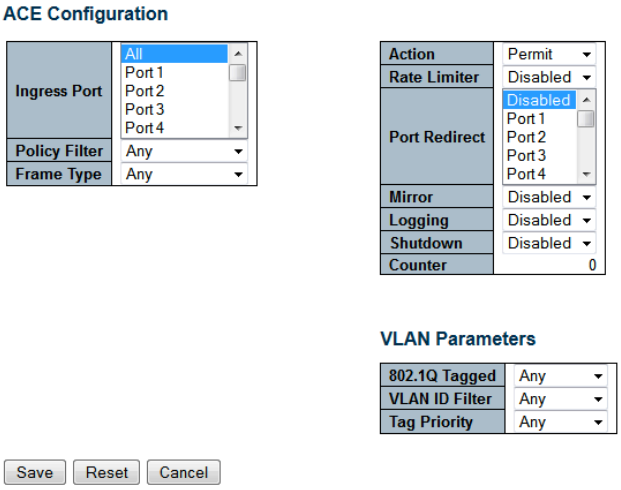

Ingress Port

Select the ingress port for which this ACE applies.
All: The ACE applies to all ports.
Port *n*: The ACE applies to this port number, where *n* is the number of the switch port. You can select one port or select multiple ports for the entry.

Policy Filter

Specify the policy number filter for this ACE. The policy ID should be the same when you want apply it to the ACL or Port.
Any: No policy filter is specified. (policy filter status is "don't-care".)
Specific: If you want to filter a specific policy with this ACE, choose this value. Two field for entering an policy value and bitmask appears.

Policy Value

When "Specific" is selected for the policy filter, you can enter a specific policy value. The allowed range is **0** to **255**.

Policy Bitmask

When "Specific" is selected for the policy filter, you can enter a specific policy bitmask. The allowed range is **0x0** to **0xff**.

Select the switch to which this ACE applies. This parameter is reserved to the Stacking model. If the switch doesn't support stacking, the parameter will not display here.
Any: The ACE applies to any port.
Switch n: The ACE applies to this switch number, where n is the number of the switch.

Frame Type

Select the frame type for this ACE. These frame types are mutually exclusive.
Any: Any frame can match this ACE.

Ethernet Type: Only Ethernet Type frames can match this ACE. The IEEE 802.3 describes the value of Length/Type Field specifications to be greater than or equal to 1536 decimal (equal to 0600 hexadecimal).
ARP: Only ARP frames can match this ACE. Notice the ARP frames won't match the ACE with ethernet type.
IPv4: Only IPv4 frames can match this ACE. Notice the IPv4 frames won't match the ACE with ethernet type.

IPv6: Only IPv6 frames can match this ACE. Notice the IPv6 frames won't match the ACE with ehternet type.

Action

Specify the action to take with a frame that hits this ACE.
Permit: The frame that hits this ACE is granted permission for the ACE operation.
Deny: The frame that hits this ACE is dropped.

Rate Limiter

Specify the rate limiter in number of base units. The allowed range is **1** to **16**. **Disabled** indicates that the rate limiter operation is disabled.

Port Copy

Frames that hit the ACE are copied to the port number specified here. The allowed range is the same as the switch port number range. **Disabled** indicates that the port copy operation is disabled.

Mirror

Specify the mirror operation of this port. Frames matching the ACE are mirrored to the destination mirror port. The allowed values are:
Enabled: Frames received on the port are mirrored.
Disabled: Frames received on the port are not mirrored.
The default value is "Disabled".

Logging

Specify the logging operation of the ACE. The allowed values:
Enabled: Frames matching the ACE are stored in the System Log.
Disabled: Frames matching the ACE are not logged.
Note that the System Log memory size and logging rate is limited.

Shutdown

Specify the port shut down operation of the ACE. The allowed values:
Enabled: If a frame matches the ACE, the ingress port will be disabled.
Disabled: Port shut down is disabled for the ACE.

Counter

The counter indicates the number of times the ACE was hit by a frame.

MAC Parameters

SMAC Filter

*(*Only *displayed when the frame type is Ethernet Type or ARP.)*
Specify the source MAC filter for this ACE.
Any: No SMAC filter is specified. (SMAC filter status is "don't-care".)
Specific: If you want to filter a specific source MAC address with this ACE, choose this value. A field for

entering an SMAC value appears.

SMAC Value

When "Specific" is selected for the SMAC filter, you can enter a specific source MAC address. The legal format is "xx-xx-xx-xx-xx-xx". A frame that hits this ACE matches this SMAC value.

DMAC Filter

Specify the destination MAC filter for this ACE.
Any: No DMAC filter is specified. (DMAC filter status is "don't-care.")
MC: Frame must be multicast.
BC: Frame must be broadcast.
UC: Frame must be unicast.
Specific: If you want to filter a specific destination MAC address with this ACE, choose this value. A field for entering a DMAC value appears.

DMAC Value

When "Specific" is selected for the DMAC filter, you can enter a specific destination MAC address. The legal format is "xx-xx-xx-xx-xx-xx". A frame that hits this ACE matches this DMAC value.

VLAN Parameters

802.1Q Tagged

Specify whether frames can hit the action according to the 802.1Q tagged. The allowed values:
Any: Any value is allowed ("don't-care").
Enabled: Tagged frame only.
Disabled: Untagged frame only.
The default value is "Any".

VLAN ID Filter

Specify the VLAN ID filter for this ACE.
Any: No VLAN ID filter is specified. (VLAN ID filter status is "don't-care.")
Specific: If you want to filter a specific VLAN ID with this ACE, choose this value. A field for entering a VLAN ID number appears.

VLAN ID

When "Specific" is selected for the VLAN ID filter, you can enter a specific VLAN ID number. The allowed range is **1** to **4095**. A frame that hits this ACE matches this VLAN ID value.

Tag Priority

Specify the tag priority for this ACE. A frame that hits this ACE matches this tag priority. The allowed number range is `0` to `7`. The value **Any** means that no tag priority is specified (tag priority is "don't-care.")

ARP Parameters

The ARP parameters can be configured when Frame Type "ARP" is selected.

ARP/RARP

Specify the available ARP/RARP opcode (OP) flag for this ACE.
Any: No ARP/RARP OP flag is specified. (OP is "don't-care.")
ARP: Frame must have ARP/RARP opcode set to ARP.
RARP: Frame must have ARP/RARP opcode set to RARP.
Other: Frame has unknown ARP/RARP Opcode flag.

Request/Reply

Specify the available ARP/RARP opcode (OP) flag for this ACE.
Any: No ARP/RARP OP flag is specified. (OP is "don't-care.")
Request: Frame must have ARP Request or RARP Request OP flag set.
Reply: Frame must have ARP Reply or RARP Reply OP flag.

Sender IP Filter

Specify the sender IP filter for this ACE.
Any: No sender IP filter is specified. (Sender IP filter is "don't-care.")
Host: Sender IP filter is set to Host. Specify the sender IP address in the SIP Address field that appears.
Network: Sender IP filter is set to Network. Specify the sender IP address and sender IP mask in the SIP Address and SIP Mask fields that appear.

Sender IP Address

When "Host" or "Network" is selected for the sender IP filter, you can enter a specific sender IP address in dotted decimal notation.

Sender IP Mask

When "Network" is selected for the sender IP filter, you can enter a specific sender IP mask in dotted decimal notation.

Target IP Filter

Specify the target IP filter for this specific ACE.
Any: No target IP filter is specified. (Target IP filter is "don't-care.")
Host: Target IP filter is set to Host. Specify the target IP address in the Target IP Address field that appears.
Network: Target IP filter is set to Network. Specify the target IP address and target IP mask in the Target IP Address and Target IP Mask fields that appear.

Target IP Address

When "Host" or "Network" is selected for the target IP filter, you can enter a specific target IP address in dotted decimal notation.

Target IP Mask

When "Network" is selected for the target IP filter, you can enter a specific target IP mask in dotted decimal notation.

ARP SMAC Match

Specify whether frames can hit the action according to their sender hardware address field (SHA) settings.

0: ARP frames where SHA is not equal to the SMAC address.
1: ARP frames where SHA is equal to the SMAC address.
Any: Any value is allowed ("don't-care").

RARP DMAC Match

Specify whether frames can hit the action according to their target hardware address field (THA) settings.
0: RARP frames where THA is not equal to the DMAC address.
1: RARP frames where THA is equal to the DMAC address.
Any: Any value is allowed ("don't-care").

IP/Ethernet Length

Specify whether frames can hit the action according to their ARP/RARP hardware address length (HLN) and protocol address length (PLN) settings.
0: ARP/RARP frames where the HLN is not equal to Ethernet (0x06) or the (PLN) is not equal to IPv4 (0x04).
1: ARP/RARP frames where the HLN is equal to Ethernet (0x06) and the (PLN) is equal to IPv4 (0x04).
Any: Any value is allowed ("don't-care").

IP

Specify whether frames can hit the action according to their ARP/RARP hardware address space (HRD) settings.
0: ARP/RARP frames where the HLD is not equal to Ethernet (1).
1: ARP/RARP frames where the HLD is equal to Ethernet (1).
Any: Any value is allowed ("don't-care").

Ethernet

Specify whether frames can hit the action according to their ARP/RARP protocol address space (PRO) settings.
0: ARP/RARP frames where the PRO is not equal to IP (0x800).
1: ARP/RARP frames where the PRO is equal to IP (0x800).
Any: Any value is allowed ("don't-care").

IP Parameters

The IP parameters can be configured when Frame Type "IPv4" is selected.

IP Protocol Filter

Specify the IP protocol filter for this ACE.
Any: No IP protocol filter is specified ("don't-care").
Specific: If you want to filter a specific IP protocol filter with this ACE, choose this value. A field for entering an IP protocol filter appears.
ICMP: Select ICMP to filter IPv4 ICMP protocol frames. Extra fields for defining ICMP parameters will appear. These fields are explained later in this help file.
UDP: Select UDP to filter IPv4 UDP protocol frames. Extra fields for defining UDP parameters will appear. These fields are explained later in this help file.
TCP: Select TCP to filter IPv4 TCP protocol frames. Extra fields for defining TCP parameters will appear. These fields are explained later in this help file.

IP Protocol Value

When "Specific" is selected for the IP protocol value, you can enter a specific value. The allowed range is `0` to `255`. A frame that hits this ACE matches this IP protocol value.

IP TTL

Specify the Time-to-Live settings for this ACE.

zero: IPv4 frames with a Time-to-Live field greater than zero must not be able to match this entry.
non-zero: IPv4 frames with a Time-to-Live field greater than zero must be able to match this entry.
Any: Any value is allowed ("don't-care").

IP Fragment

Specify the fragment offset settings for this ACE. This involves the settings for the More Fragments (MF) bit and the Fragment Offset (FRAG OFFSET) field for an IPv4 frame.
No: IPv4 frames where the MF bit is set or the FRAG OFFSET field is greater than zero must not be able to match this entry.
Yes: IPv4 frames where the MF bit is set or the FRAG OFFSET field is greater than zero must be able to match this entry.
Any: Any value is allowed ("don't-care").

IP Option

Specify the options flag setting for this ACE.
No: IPv4 frames where the options flag is set must not be able to match this entry.
Yes: IPv4 frames where the options flag is set must be able to match this entry.
Any: Any value is allowed ("don't-care").

SIP Filter

Specify the source IP filter for this ACE.
Any: No source IP filter is specified. (Source IP filter is "don't-care".)
Host: Source IP filter is set to Host. Specify the source IP address in the SIP Address field that appears.
Network: Source IP filter is set to Network. Specify the source IP address and source IP mask in the SIP Address and SIP Mask fields that appear.

SIP Address

When "Host" or "Network" is selected for the source IP filter, you can enter a specific SIP address in dotted decimal notation.

SIP Mask

When "Network" is selected for the source IP filter, you can enter a specific SIP mask in dotted decimal notation.

DIP Filter

Specify the destination IP filter for this ACE.
Any: No destination IP filter is specified. (Destination IP filter is "don't-care".)
Host: Destination IP filter is set to Host. Specify the destination IP address in the DIP Address field that appears.
Network: Destination IP filter is set to Network. Specify the destination IP address and destination IP mask in the DIP Address and DIP Mask fields that appear.

DIP Address

When "Host" or "Network" is selected for the destination IP filter, you can enter a specific DIP address in dotted decimal notation.

DIP Mask

When "Network" is selected for the destination IP filter, you can enter a specific DIP mask in dotted decimal notation.

ICMP Parameters

ICMP Type Filter

Specify the ICMP filter for this ACE.
Any: No ICMP filter is specified (ICMP filter status is "don't-care").
Specific: If you want to filter a specific ICMP filter with this ACE, you can enter a specific ICMP value. A field for entering an ICMP value appears.

ICMP Type Value

When "Specific" is selected for the ICMP filter, you can enter a specific ICMP value. The allowed range is **0** to **255**. A frame that hits this ACE matches this ICMP value.

ICMP Code Filter

Specify the ICMP code filter for this ACE.
Any: No ICMP code filter is specified (ICMP code filter status is "don't-care").
Specific: If you want to filter a specific ICMP code filter with this ACE, you can enter a specific ICMP code value. A field for entering an ICMP code value appears.

ICMP Code Value

When "Specific" is selected for the ICMP code filter, you can enter a specific ICMP code value. The allowed range is `0` to `255`. A frame that hits this ACE matches this ICMP code value.

TCP/UDP Parameters

TCP/UDP Source Filter

Specify the TCP/UDP source filter for this ACE.
Any: No TCP/UDP source filter is specified (TCP/UDP source filter status is "don't-care").
Specific: If you want to filter a specific TCP/UDP source filter with this ACE, you can enter a specific TCP/UDP source value. A field for entering a TCP/UDP source value appears.
Range: If you want to filter a specific TCP/UDP source range filter with this ACE, you can enter a specific TCP/UDP source range value. A field for entering a TCP/UDP source value appears.

TCP/UDP Source No.

When "Specific" is selected for the TCP/UDP source filter, you can enter a specific TCP/UDP source value. The allowed range is `0` to `65535`. A frame that hits this ACE matches this TCP/UDP source value.

TCP/UDP Source Range

When "Range" is selected for the TCP/UDP source filter, you can enter a specific TCP/UDP source range value. The allowed range is `0` to `65535`. A frame that hits this ACE matches this TCP/UDP source value.

TCP/UDP Destination Filter

Specify the TCP/UDP destination filter for this ACE.
Any: No TCP/UDP destination filter is specified (TCP/UDP destination filter status is "don't-care").
Specific: If you want to filter a specific TCP/UDP destination filter with this ACE, you can enter a specific TCP/UDP destination value. A field for entering a TCP/UDP destination value appears.
Range: If you want to filter a specific range TCP/UDP destination filter with this ACE, you can enter a specific TCP/UDP destination range value. A field for entering a TCP/UDP destination value appears.

TCP/UDP Destination Number

When "Specific" is selected for the TCP/UDP destination filter, you can enter a specific TCP/UDP destination value. The allowed range is `0` to `65535`. A frame that hits this ACE matches this TCP/UDP destination value.

TCP/UDP Destination Range

When "Range" is selected for the TCP/UDP destination filter, you can enter a specific TCP/UDP destination range value. The allowed range is `0` to `65535`. A frame that hits this ACE matches this TCP/UDP destination value.

TCP FIN

Specify the TCP "No more data from sender" (FIN) value for this ACE.
0: TCP frames where the FIN field is set must not be able to match this entry.
1: TCP frames where the FIN field is set must be able to match this entry.
Any: Any value is allowed ("don't-care").

TCP SYN

Specify the TCP "Synchronize sequence numbers" (SYN) value for this ACE.
0: TCP frames where the SYN field is set must not be able to match this entry.
1: TCP frames where the SYN field is set must be able to match this entry.
Any: Any value is allowed ("don't-care").

TCP RST

Specify the TCP "Reset the connection" (RST) value for this ACE.
0: TCP frames where the RST field is set must not be able to match this entry.
1: TCP frames where the RST field is set must be able to match this entry.
Any: Any value is allowed ("don't-care").

TCP PSH

Specify the TCP "Push Function" (PSH) value for this ACE.
0: TCP frames where the PSH field is set must not be able to match this entry.
1: TCP frames where the PSH field is set must be able to match this entry.
Any: Any value is allowed ("don't-care").

TCP ACK

Specify the TCP "Acknowledgment field significant" (ACK) value for this ACE.
0: TCP frames where the ACK field is set must not be able to match this entry.
1: TCP frames where the ACK field is set must be able to match this entry.
Any: Any value is allowed ("don't-care").

TCP URG

Specify the TCP "Urgent Pointer field significant" (URG) value for this ACE.
0: TCP frames where the URG field is set must not be able to match this entry.
1: TCP frames where the URG field is set must be able to match this entry.
Any: Any value is allowed ("don't-care").

Ethernet Type Parameters

The Ethernet Type parameters can be configured when Frame Type "Ethernet Type" is selected.

EtherType Filter

Specify the Ethernet type filter for this ACE.
Any: No EtherType filter is specified (EtherType filter status is "don't-care").
Specific: If you want to filter a specific EtherType filter with this ACE, you can enter a specific EtherType value. A field for entering a EtherType value appears.

Ethernet Type Value

When "Specific" is selected for the EtherType filter, you can enter a specific EtherType value. The allowed range is **0x600** to **0xFFFF** but excluding 0x800(IPv4), 0x806(ARP) and 0x86DD(IPv6). A frame that hits this ACE matches this EtherType value.

Buttons
Save: Click to save changes.
Reset: Click to undo any changes made locally and revert to previously saved values.
Cancel: Return to the previous page.

4.4.2.4 Switch / Network / DHCP Configuration

DHCP Snooping Configuration

Configure DHCP Snooping on this page.

Snooping Mode

Indicates the DHCP snooping mode operation. Possible modes:
Enabled: Enable DHCP snooping mode operation. When DHCP snooping mode operation is enabled, the DHCP request messages will be forwarded to trusted ports and only allow reply packets from trusted ports.
Disabled: Disable DHCP snooping mode operation.

Port Mode

Indicates the DHCP snooping port mode. Possible port modes:
Trusted: Configures the port as trusted source of the DHCP messages.
Untrusted: Configures the port as untrusted source of the DHCP messages.

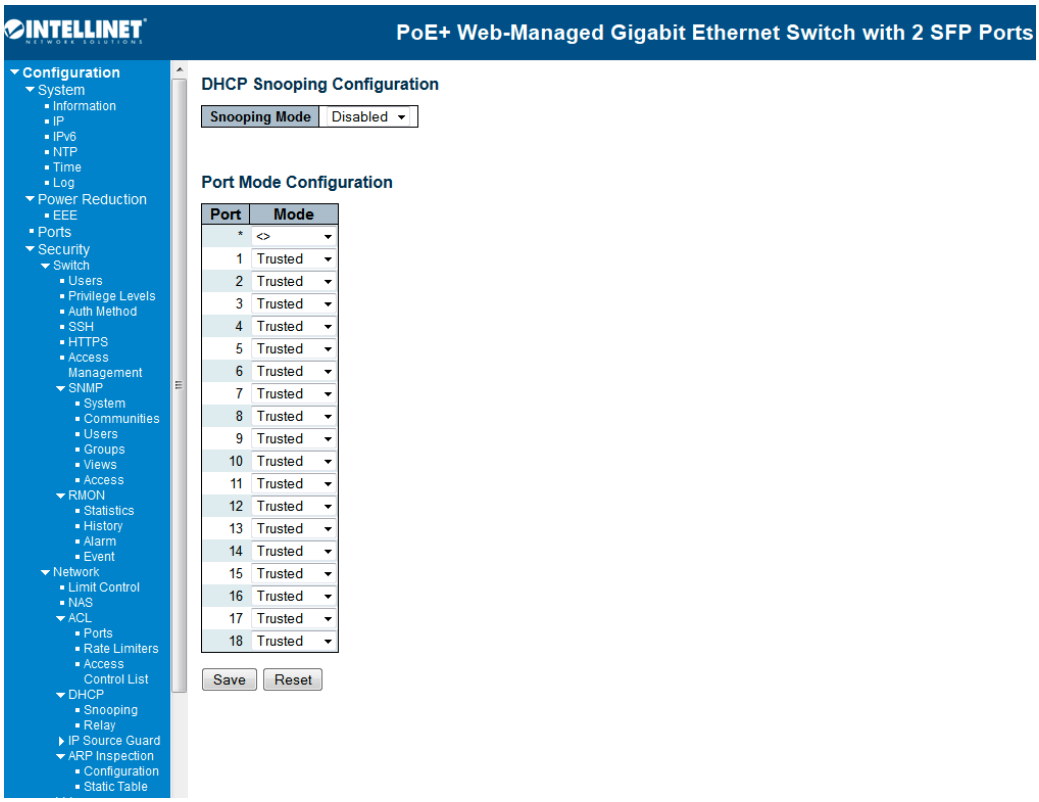

Buttons

Save: Click to save changes.
Reset: Click to undo any changes made locally and revert to previously saved values.

DHCP Relay Configuration

Configure DHCP Relay on this page.

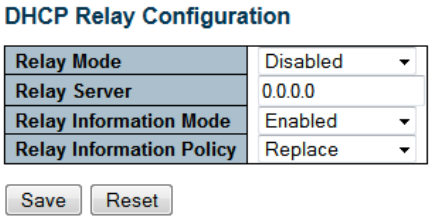

Relay Mode

Indicates the DHCP relay mode operation. Possible modes:
Enabled: Enable DHCP relay mode operation. When DHCP relay mode operation is enabled, the agent forwards and transfers DHCP messages between the clients and the server when they are not in the same subnet domain. And the DHCP broadcast message won't be flooded for security considerations.
Disabled: Disable DHCP relay mode operation.

Relay Server

Indicates the DHCP relay server IP address. A DHCP relay agent is used to forward and to transfer DHCP messages between the clients and the server when they are not in the same subnet domain.

Relay Information Mode

Indicates the DHCP relay information mode option operation. The option 82 circuit ID format as "[vlan_id][module_id][port_no]". The first four characters represent the VLAN ID, the fifth and sixth characters are the module ID (in stand-alone device it always equal 0, in a stackable device it means switch ID), and the last two characters are the port number. For example, "00030108" means the DHCP message received from VLAN ID 3, switch ID 1, port No 8. And the option 82 remote ID value is equal to the switch MAC address.
Possible modes:
Enabled: Enable DHCP relay information mode operation. When DHCP relay information mode operation is enabled, the agent inserts specific information (option 82) into a DHCP message when forwarding to DHCP server and removes it from a DHCP message when transferring to DHCP client. It only works when DHCP relay operation mode is enabled.
Disabled: Disable DHCP relay information mode operation.

Relay Information Policy

Indicates the DHCP relay information option policy. When DHCP relay information mode operation is enabled, if agent receives a DHCP message that already contains relay agent information it will enforce the policy. And it only works under DHCP if relay information operation mode is enabled. Possible policies**:**
Replace: Replace the original relay information when a DHCP message that already contains it is received.
Keep: Keep the **original** relay information when a DHCP message that already contains it is received.
Drop: Drop the **package** when a DHCP message that already contains relay information is received.

4.4.2.5 IP Source Guard Configuration

IP Source Guard Configuration

This page provides IP Source Guard-related configuration.

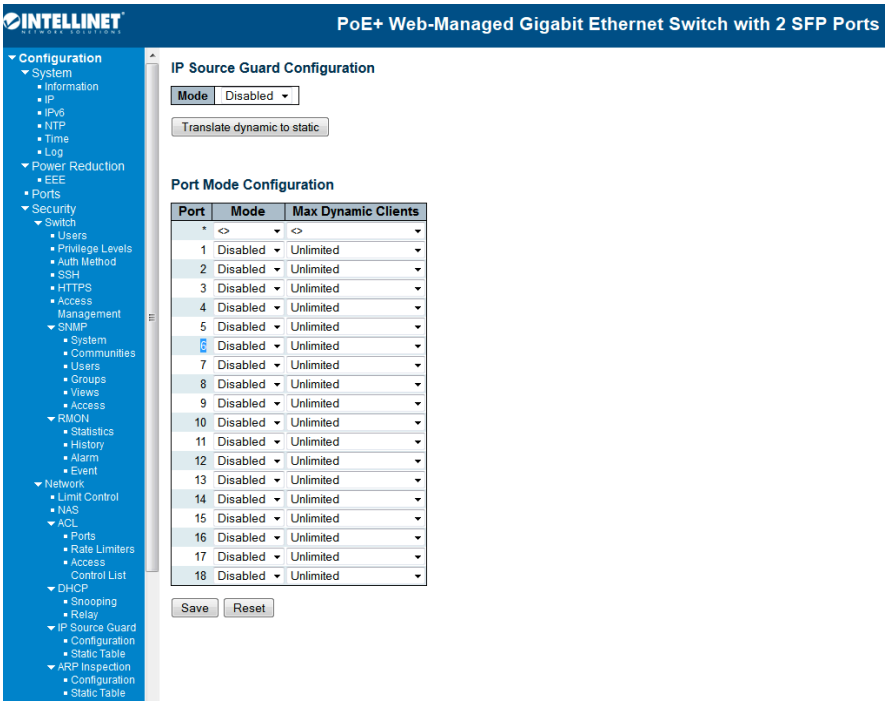

Mode of IP Source Guard Configuration

Enable the Global IP Source Guard or disable the Global IP Source Guard. All configured ACEs will be lost when the mode is enabled.

Port Mode Configuration

Specify IP Source Guard is enabled on which ports. Only when both Global Mode and Port Mode on a given port are enabled is IP Source Guard enabled on this given port.

Max Dynamic Clients

Specify the maximum number of dynamic clients that can be learned on given port. This value can be 0, 1, 2 or unlimited. If the port mode is enabled and the value of max dynamic client is equal to 0, it means the switch will only allow the IP packets forwarding that are matched in static entries on the specific port.

Buttons

Save: Click to save changes.
Reset: Click to undo any changes made locally and revert to previously saved values.
Translate dynamic to static: Click to translate all dynamic entries to static entries.

Static IP Source Guard Table

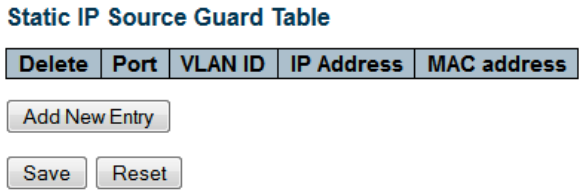

Delete

Check to delete the entry. It will be deleted during the next save.

Port

The logical port for the settings.

VLAN ID

The VLAN ID for the settings.

IP Address

Allowed Source IP address.

MAC address

Allowed Source MAC address.

Adding new entry

Click to add a new entry to the Static IP Source Guard table. Specify the Port, VLAN ID, IP address and IP Mask for the new entry. Click "Save."

Buttons

Save: Click to save changes.
Reset: Click to undo any changes made locally and revert to previously saved values.

4.4.2.6 ARP Inspection

ARP Inspection

This page provides ARP Inspection related configuration.

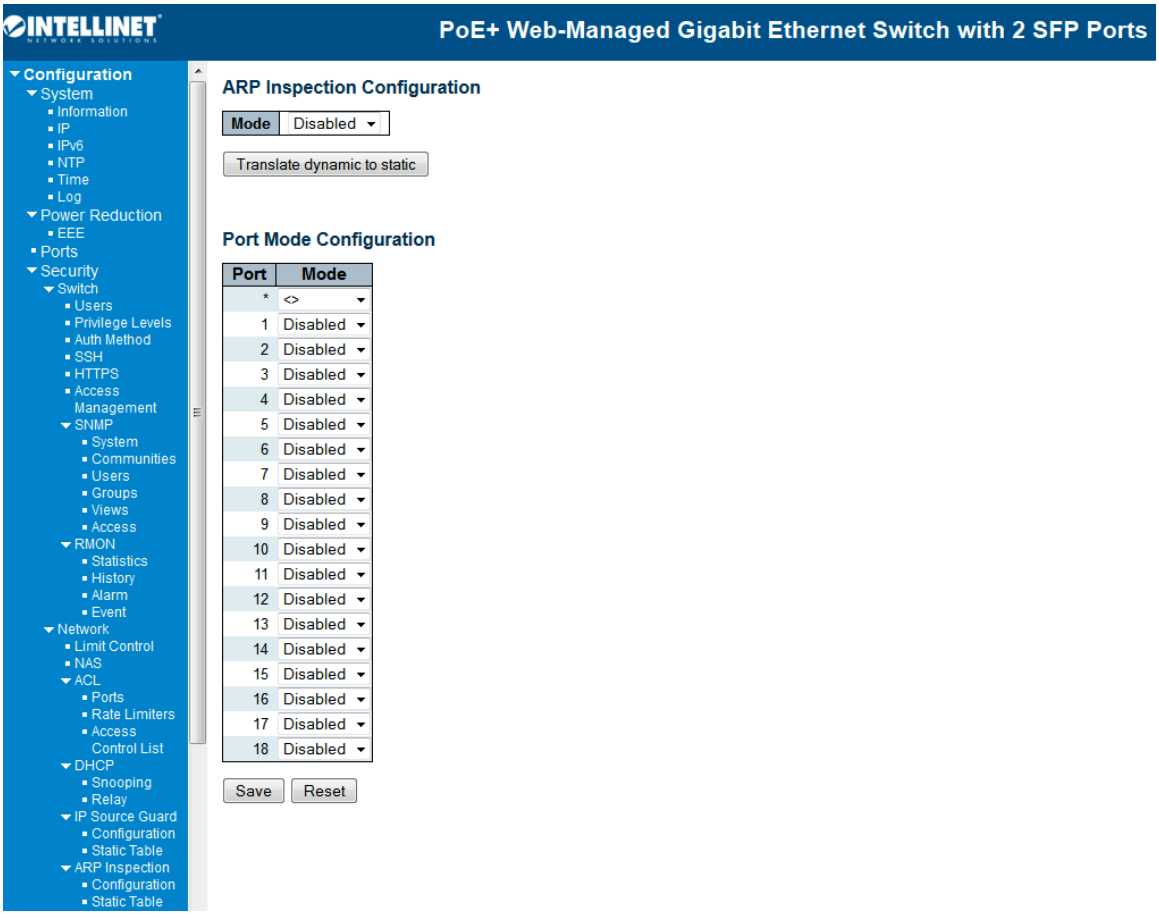

Mode of ARP Inspection Configuration

Enable the Global ARP Inspection or disable the Global ARP Inspection.

Port Mode Configuration

Specify ARP Inspection is enabled on which ports. Only when both Global Mode and Port Mode on a given port are enabled, ARP Inspection is enabled on this given port.

Buttons

Save: Click to save changes.
Reset: Click to undo any changes made locally and revert to previously saved values.
Translate dynamic to static: Click to translate all dynamic entries to static entries.

Static ARP Inspection Table

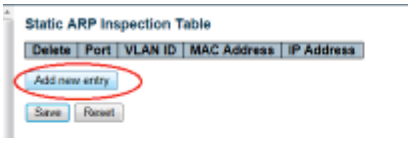

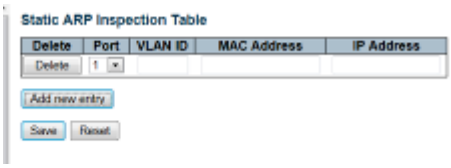

Delete

Check to delete the entry. It will be deleted during the next save.

Port

The logical port for the settings.

VLAND ID

The VLAN ID for the settings.

MAC Address

Allowed Source MAC address in ARP request packets.

IP Address

Allowed Source IP address in ARP request packets.

Adding new entry

Click to add a new entry to the Static ARP Inspection table. Specify the Port, VLAN ID, MAC address, and IP address for the new entry. Click "Save."

Buttons

Save: Click to save changes.
Reset: Click to undo any changes made locally and revert to previously saved values.

4.4.3 Security / AAA Authentication Server Configuration

This page allows you to configure the Authentication Servers.

Common Server Configuration

These setting are common for all of the Authentication Servers.

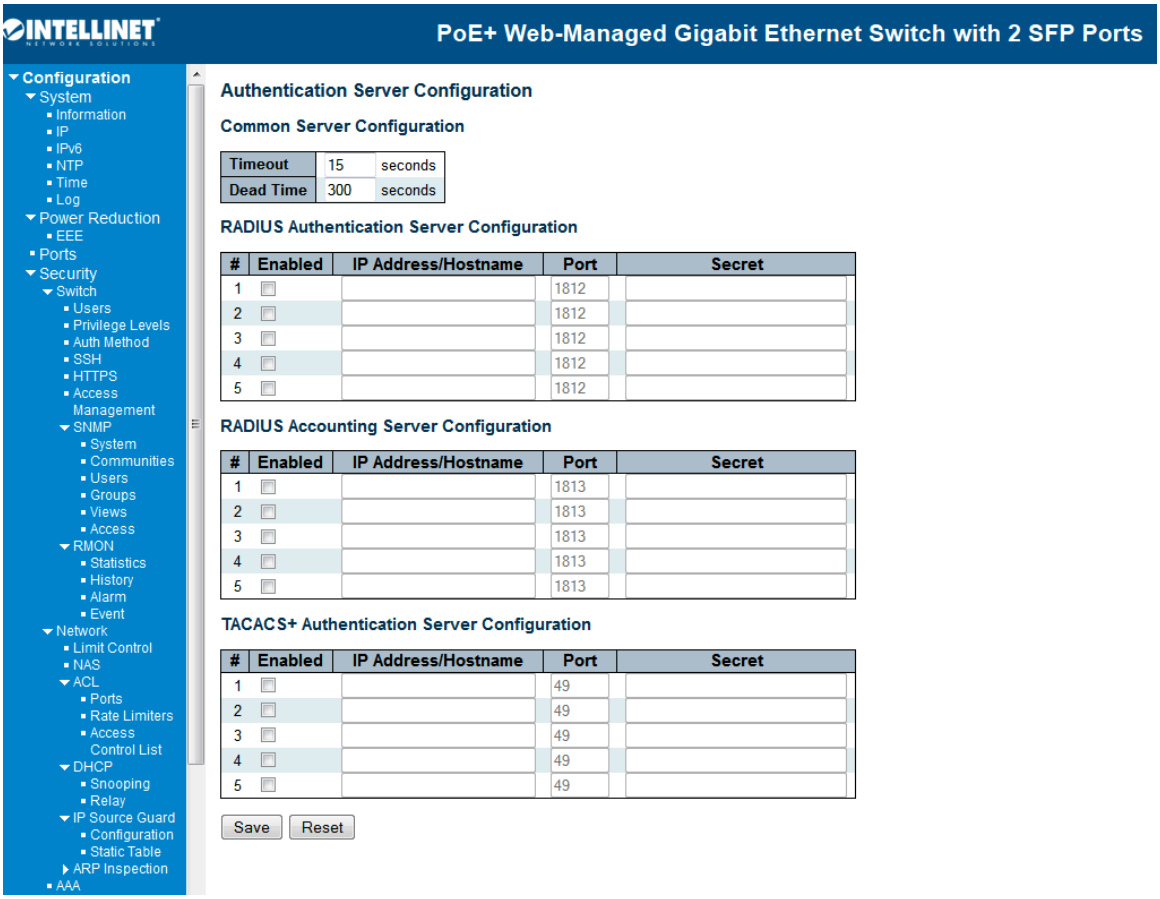

Timeout

The Timeout, which can be set to a number between 3 and 3600 seconds, is the maximum time to wait for a reply from a server. If the server does not reply within this timeframe, we will consider it to be dead and continue with the next enabled server (if any).

RADIUS servers are using the UDP protocol, which is unreliable by design. In order to cope with lost frames, the timeout interval is divided into 3 subintervals of equal length. If a reply is not received within the subinterval, the request is transmitted again. This algorithm causes the RADIUS server to be queried up to 3 times before it is considered to be dead.

Dead Time

The Dead Time, which can be set to a number between 0 and 3600 seconds, is the period during which the switch will not send new requests to a server that has failed to respond to a previous request. This will stop the switch from continually trying to contact a server that it has already determined as dead. Setting the Dead Time to a value greater than 0 (zero) will enable this feature, but only if more than one server has been configured.

RADIUS Authentication Server Configuration

The table has one row for each RADIUS Authentication Server and a number of columns:

#

The RADIUS Authentication Server number for which the configuration below applies.

Enabled

Enable the RADIUS Authentication Server by checking this box.

IP Address/Hostname

The IP address or hostname of the RADIUS Authentication Server. The IP address is expressed in dotted decimal notation.

Port

The UDP port to use on the RADIUS Authentication Server. If the port is set to 0 (zero), the default port (1812) is used on the RADIUS Authentication Server.

Secret

The secret — up to 29 characters long — shared between the RADIUS Authentication Server and the switch.

RADIUS Accounting Server Configuration

The table has one row for each RADIUS Accounting Server and a number of columns, which are:

#

The RADIUS Accounting Server number for which the configuration below applies.

Enabled

Enable the RADIUS Accounting Server by checking this box.

IP Address/Hostname

The IP address or hostname of the RADIUS Accounting Server. IP address is expressed in dotted decimal notation.

Port

The UDP port to use on the RADIUS Accounting Server. If the port is set to 0 (zero), the default port (1813) is used on the RADIUS Accounting Server.

Secret

The secret — up to 29 characters long — shared between the RADIUS Accounting Server and the switch.

TACACS+ Authentication Server Configuration

The table has one row for each TACACS+ Authentication Server and a number of columns:

#

The TACACS+ Authentication Server number for which the configuration below applies.

Enabled

Enable the TACACS+ Authentication Server by checking this box.

IP Address/Hostname

The IP address or hostname of the TACACS+ Authentication Server. The IP address is expressed in dotted decimal notation.

Port

The TCP port to use on the TACACS+ Authentication Server. If the port is set to 0 (zero), the default port (49) is used on the TACACS+ Authentication Server.

Secret

The secret — up to 29 characters long — shared between the TACACS+ Authentication Server and the switch.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.5 Aggregation Configuration

Link Aggregation is also known as Port Trunking. It allows user using multiple ports in parallel to increase the link speed beyond the limits of a port and to increase the redundancy for higher availability. The switch support both Static and Dynamic link aggregation, LACP. The switch also supports different Hash mechanisms to forward traffic according to the MAC address or IP, Protocol Port Number.

4.5.1 Static Aggregation

This page is used to configure the Aggregation hash mode and the aggregation group.

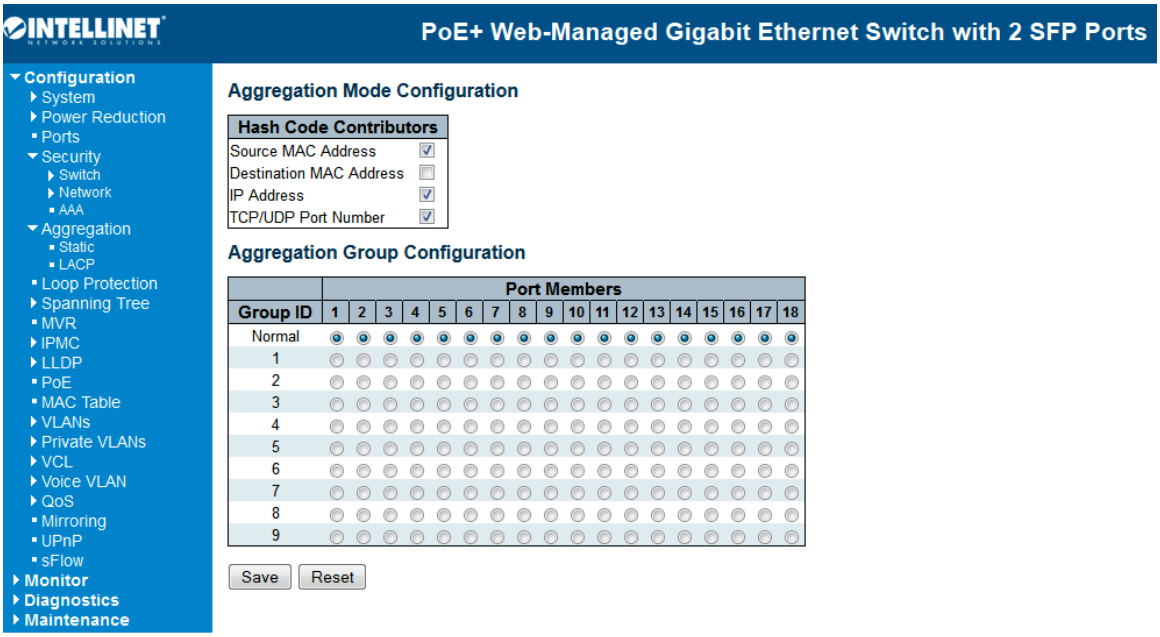

The aggregation hash mode settings are global, whereas the aggregation group relates to the currently selected stack unit, as reflected by the page header.

Hash Code Contributors

Source MAC Address

The Source MAC address can be used to calculate the destination port for the frame. Check to enable the use of the Source MAC address, or uncheck to disable. By default, Source MAC Address is enabled.

Destination MAC Address

The Destination MAC Address can be used to calculate the destination port for the frame. Check to enable the use of the Destination MAC Address, or uncheck to disable. By default, Destination MAC Address is disabled.

IP Address

The IP address can be used to calculate the destination port for the frame. Check to enable the use of the IP Address, or uncheck to disable. By default, IP Address is enabled.

TCP/UDP Port Number

The TCP/UDP port number can be used to calculate the destination port for the frame. Check to enable the use of the TCP/UDP Port Number, or uncheck to disable. By default, TCP/UDP Port Number is enabled.

Aggregation Group Configuration

Group ID

Indicates the group ID for the settings contained in the same row. Group ID "Normal" indicates there is no aggregation. Only one group ID is valid per port.

Port Members

Each switch port is listed for each group ID. Select a radio button to include a port in an aggregation, or clear the radio button to remove the port from the aggregation. By default, no ports belong to any aggregation group. Only full duplex ports can join an aggregation and ports must be in the same speed in each group.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.5.2 LACP - Dynamic Aggregation

This page allows the user to inspect the current LACP port configurations, and possibly change them, as well.

LACP Port Configuration

Port	LACP Enabled	Key		Role	Timeout	Prio
*	☐	<>		<>	<>	32768
1	☐	Auto		Active	Fast	32768
2	☐	Auto		Active	Fast	32768
3	☐	Auto		Active	Fast	32768
4	☐	Auto		Active	Fast	32768
5	☐	Auto		Active	Fast	32768
6	☐	Auto		Active	Fast	32768
7	☐	Auto		Active	Fast	32768
8	☐	Auto		Active	Fast	32768
9	☐	Auto		Active	Fast	32768
10	☐	Auto		Active	Fast	32768
11	☐	Auto		Active	Fast	32768
12	☐	Auto		Active	Fast	32768
13	☐	Auto		Active	Fast	32768
14	☐	Auto		Active	Fast	32768
15	☐	Auto		Active	Fast	32768
16	☐	Auto		Active	Fast	32768
17	☐	Auto		Active	Fast	32768
18	☐	Auto		Active	Fast	32768

Save Reset

Port

The switch port number.

LACP Enabled

Controls whether LACP is enabled on this switch port. LACP will form an aggregation when two or more ports are connected to the same partner. LACP can form up to 12 LLAGs per switch and two GLAGs per stack.

Key

The Key value incurred by the port (range: 1-65535). The **Auto** setting will set the key as appropriate by the physical link speed: 10Mb = 1, 100Mb = 2, 1Gb = 3. Using the **Specific** setting, a user-defined value can be entered. Ports with the same Key value can participate in the same aggregation group, while ports with different keys cannot.

Role

The **Role** shows the LACP activity status. The **Active** will transmit LACP packets each second, while **Passive** will wait for an LACP packet from a partner (speak if spoken to, as it were).

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.6 Loop Protection

This page allows you to inspect the current Loop Protection configurations, and possibly change them, as well. The loop protection feature is very important to protect the unexpected network loop, especially when you install the switch on the Internet. Incorrect installation, media failure or hacker attacks may create network loop.

The switch supports the Loop Protection feature. The port can be shut down or log the information per your configuration when the switch does detect the network loop.

General Settings

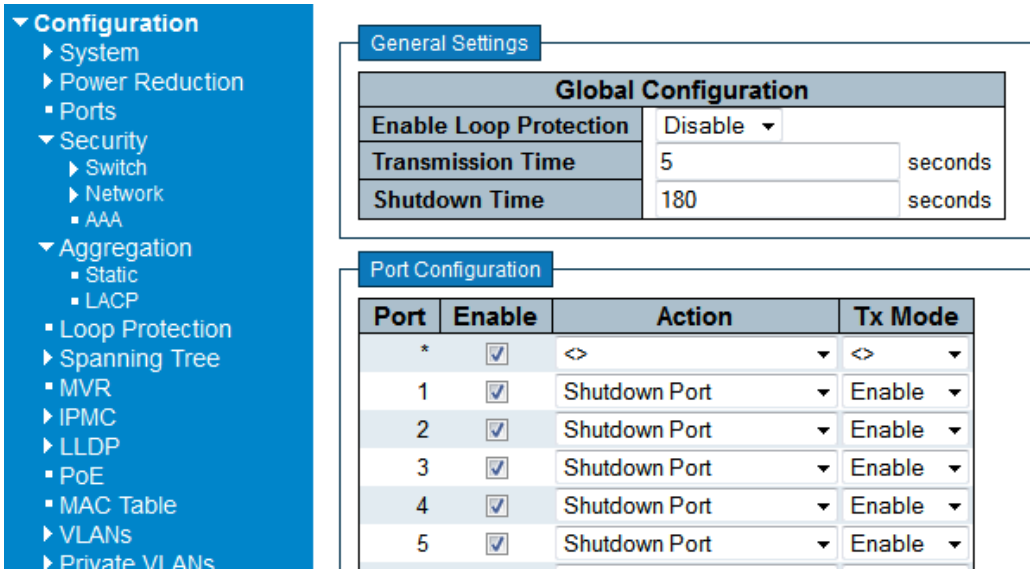

Enable Loop Protection

Controls whether loop protection is enabled (as a whole).

Transmission Time

The interval between each loop protection PDU sent on each port. Valid values are 1 to 10 seconds.

Shutdown Time

The period (in seconds) for which a port will be kept disabled in the event a loop is detected (and the port action shuts down the port). Valid values are 0 to 604800 seconds (7 days). A value of zero will keep a port disabled (until next device restart).

Port Configuration

Port

The switch port number of the port.

Enable

Controls whether loop protection is enabled on this switch port.

Action

Configures the action performed when a loop is detected on a port. The valid values:

Shutdown Port: Shuts down the port until the Shutdown Time timeout.

Shutdown Port and Log: Shuts down the port and log the status.

Log Only: Only log the status.

Tx Mode

Controls whether the port is actively generating loop protection PDUs, or whether it is just passively looking for looped PDUs.

Button

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.7 Spanning Tree

The switch supports Multiple Spanning Tree Protocol (MSTP), Rapid Spanning Tree Protocol (RSTP) and Legacy Spanning Tree Protocol (STP).

The STP and RSTP are combined and defined in IEEE 802.1D-2004, Rapid Spanning Tree Protocol. The RSTP protocol is applied to single network domain no matter how many VLANs are in your network. In the RSTP domain, one of the switches acts as the Root Switch and blocks the link with highest path cost to avoid network loops. There are a maximum of 23 level switches within one RSTP domain. The network size may be limited.

Multiple Spanning Tree Protocol (MSTP) is a direct extension of RSTP. It can provide an independent spanning tree for different VLANs. With the Spanning Tree and VLAN mapping, each VLAN has its own root and blocking path. As the STP region size becomes lower, the convergence time of topology change becomes faster, as well.

Here are some common abbreviations you may want to note:

Common Spanning Tree (CST): Common Spanning Tree (CST) interconnects all adjacent MST regions and acts as a virtual bridge node for communications with STP or RSTP nodes in the global network.

Common and Internal Spanning Tree (CIST): MSTP connects all bridges and LAN segments with a single Common and Internal Spanning Tree (CIST). The CIST is formed as a result of the running spanning tree algorithm between switches that support the STP, RSTP, MSTP protocols.

MSTI: Multiple Spanning Tree Instance: One VLAN can be mapped to an MSTI. Each instance has its own root switch, forwarding path, blocking path and table. An MST Region may contain multiple MSTI.

4.7.1 Spanning Tree / Bridge Setting

This page allows you to configure STP system settings. The settings are used by all STP Bridge instances in the switch.

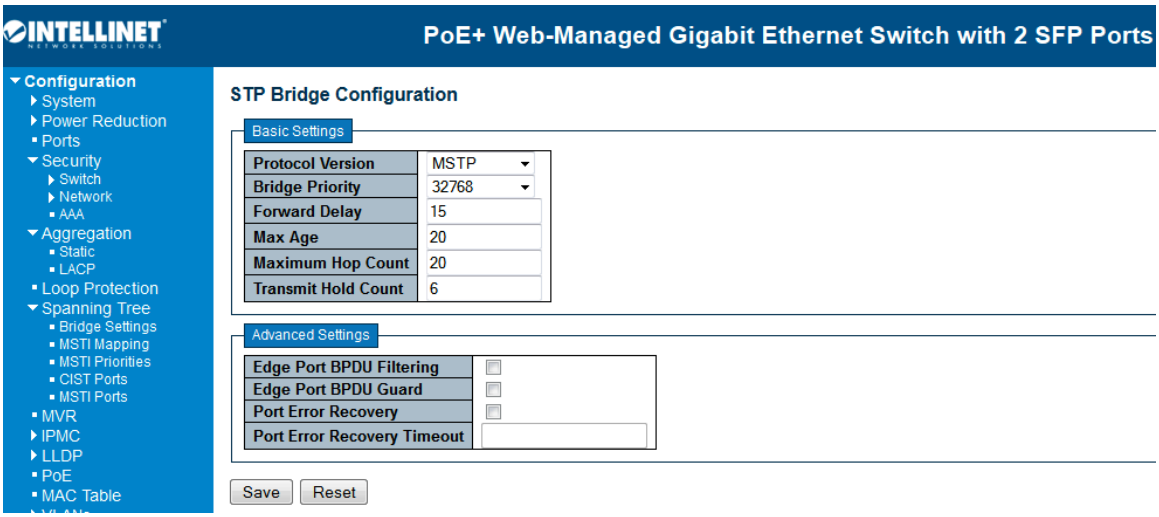

Basic Settings

Protocol Version

The STP protocol version setting. Valid values are **STP, RSTP** and **MSTP**.

Bridge Priority

Controls the bridge priority. Lower numeric values have higher priority. The bridge priority plus the MSTI instance number, concatenated (linked) with the 6-byte MAC address of the switch, forms a *Bridge Identifier*.
For **MSTP** operation, this is the priority of the CIST. Otherwise, this is the priority of the STP/RSTP bridge.

Forward Delay

The delay used by STP Bridges to transit Root and Designated Ports to Forwarding (used in STP compatible mode). Valid values are in the range 4 to 30 seconds.

Max Age

The maximum age of the information transmitted by the Bridge when it is the Root Bridge. Valid values are in the range 6 to 40 seconds, and MaxAge must be <= (FwdDelay-1)*2.

Maximum Hop Count

This defines the initial value of remaining Hops for MSTI information generated at the boundary of an MSTI region. It defines how many bridges a root bridge can distribute its BPDU information to. Valid values are in the range 6 to 40 hops.

Transmit Hold Count

The number of BPDU's a bridge port can send per second. When exceeded, transmission of the next BPDU will be delayed. Valid values are in the range 1 to 10 BPDU's per second.

Advanced Settings

This section describes the advanced settings of the Spanning Tree Protocol.

Edge Port BPDU Filtering

Control whether a port explicitly configured as Edge will transmit and receive BPDUs.

Edge Port BPDU Guard

Control whether a port explicitly configured as Edge will disable itself upon reception of a BPDU. The port will enter the error-disabled state, and will be removed from the active topology.

Port Error Recovery

Control whether a port in the error-disabled state automatically will be enabled after a certain time. If recovery is not enabled, ports have to be disabled and re-enabled for normal STP operation. The condition is also cleared by a system reboot.

Port Error Recovery Timeout

The time to pass before a port in the error-disabled state can be enabled. Valid values are between 30 and 86400 seconds (24 hours).

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.7.2 Spanning Tree / MSTI Mapping

This page allows you to inspect the current STP MSTI bridge instance priority configurations, and possibly change them, as well.

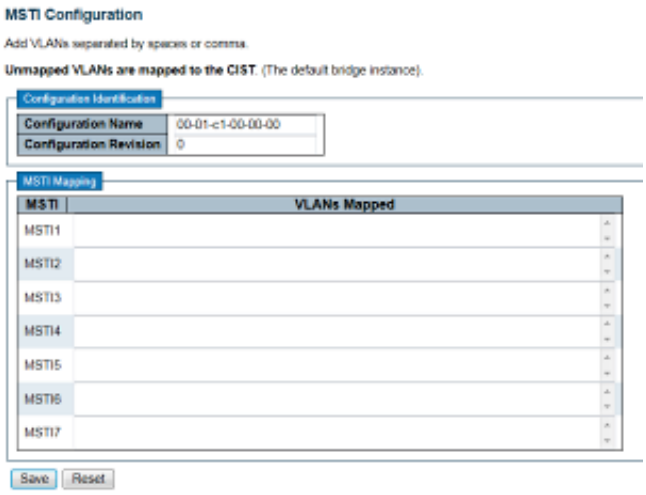

Configuration Identification

Configuration Name

The name identifying the VLAN to MSTI mapping. Bridges must share the name and revision (see below), as well as the VLAN-to-MSTI mapping configuration in order to share spanning trees for MSTIs (Intra-region). The name is at most 32 characters.

Configuration Revision

The revision of the MSTI configuration named above. This must be an integer between 0 and 65535.

MSTI Mapping

MSTI

The bridge instance. The CIST is not available for explicit mapping, as it will receive the VLANs not explicitly mapped.

VLANs Mapped

The list of VLANs mapped to the MSTI. The VLANs must be separated with a comma and/or space. A VLAN can only be mapped to one MSTI. An unused MSTI should just be left empty (I.e., not having any VLANs mapped to it).

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.7.3 Spanning Tree / MSTI Priorities

This page allows you to inspect the current STP MSTI bridge instance priority configurations, and possibly change them, as well.

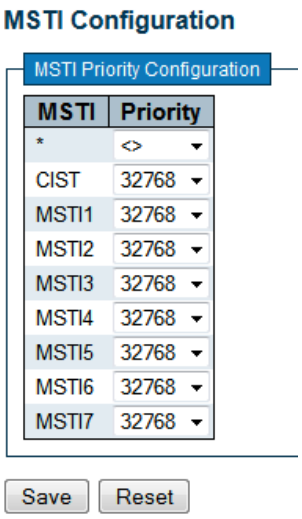

MSTI

The bridge instance. The CIST is the default instance, which is always active.

Priority

Controls the bridge priority. Lower numeric values have better priority. The bridge priority plus the MSTI instance number, concatenated with the 6-byte MAC address of the switch forms a Bridge Identifier.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.7.4 Spanning Tree / CIST Ports

This page allows you to inspect the current STP CIST port configurations, and possibly change them, as well.

This page contains settings for physical and aggregated ports.

The STP port settings relate to the currently selected stack unit, as reflected by the page header.

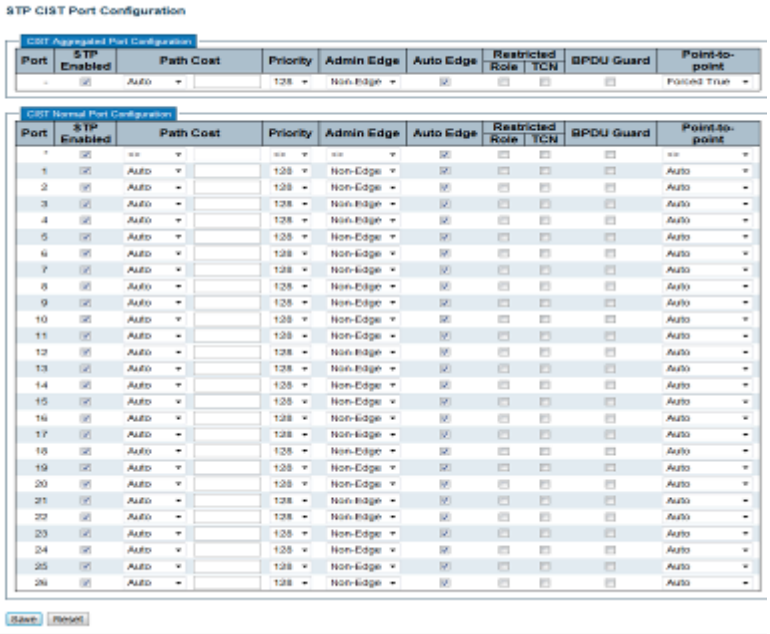

Port

The switch port number of the logical STP port.

STP Enabled

Controls whether STP is enabled on this switch port.

Path Cost

Controls the path cost incurred by the port.

The **Auto** setting will set the path cost as appropriate by the physical link speed, using the 802.1D recommended values.

Using the **Specific** setting, a user-defined value can be entered. The path cost is used when establishing the active topology of the network. Lower path cost ports are chosen as forwarding ports in favor of higher path cost ports. Valid values are in the range 1 to 200000000.

Priority

Controls the port priority. This can be used to control priority of ports having identical port cost. (See above.)

operEdge (state flag)

Operational flag describing whether the port is connecting directly to edge devices. (No Bridges attached.) Transition to the forwarding state is faster for edge ports (having *operEdge true*) than for other ports.The value of this flag is based on AdminEdge and AutoEdge fields. This flag is displayed as Edge in Monitor->Spanning Tree -> STP Detailed Bridge Status.

Admin Edge

Controls whether the *operEdge* flag should start as set or cleared. (The initial *operEdge* state when a port is initialized.)

Auto Edge

Controls whether the bridge should enable automatic edge detection on the bridge port. This allows *operEdge* to be derived from whether BPDUs are received on the port or not.

Restricted Role

If enabled, causes the port not to be selected as Root Port for the CIST or any MSTI, even if it has the best spanning tree priority vector. Such a port will be selected as an Alternate Port after the Root Port has been selected. If set, it can cause a lack of spanning tree connectivity. It can be set by a network administrator to prevent bridges external to a core region of the network from influencing the spanning tree active topology, possibly because those bridges are not under the full control of the administrator. This feature is also known as **Root Guard**.

Restricted TCN

If enabled, causes the port not to propagate received topology change notifications and topology changes to other ports. If set it can cause temporary loss of connectivity after changes in a spanning tree's active topology as a result of persistently incorrect learned station location information. It is set by a network administrator to prevent bridges external to a core region of the network, causing address flushing in that region, possibly because those bridges are not under the full control of the administrator or the physical link state of the attached LANs transits frequently.

BPDU Guard

If enabled, causes the port to disable itself upon receiving valid BPDUs. Contrary to the similar bridge setting, the port **Edge** status does not effect this setting.

A port entering error-disabled state due to this setting is subject to the bridge Port Error Recovery setting as well.

Point2Point

Controls whether the port connects to a point-to-point LAN rather than to a shared medium. This can be automatically determined, or forced either true or false. Transition to the forwarding state is faster for point-to-point LANs than for shared media.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.7.5 Spanning Tree MSTI Ports

STP MSTI Port Configuration

This page allows you to inspect the current STP MSTI port configurations, and possibly change them, as well.

An MSTI port is a virtual port, which is instantiated (represented) separately for each active CIST (physical) port for each MSTI instance configured on and applicable to the port. The MSTI instance must be selected before displaying actual MSTI port configuration options.

This page contains MSTI port settings for physical and aggregated ports.

Apart from the selected MSTI, the STP MSTI port settings also relate to the currently selected stack unit, as reflected by the page header.

Port

The switch port number of the corresponding STP CIST (and MSTI) port.

Path Cost

Controls the path cost incurred by the port. The **Auto** setting will set the path cost as appropriate by the physical link speed, using the 802.1D recommended values. Using the **Specific** setting, a user-defined value can be entered. The path cost is used when establishing the active topology of the network. Lower path cost ports are chosen as forwarding ports in favor of higher path cost ports. Valid values are in the range 1 to 200000000.

Priority

Controls the port priority. This can be used to control priority of ports having identical port cost. (See above.)

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.8 MVR (Multicast VLAN Registration)

MVR is short for Multicast VLAN Registration. The MVR is a protocol for Layer 2 networks that enables multicast traffic from a source VLAN to be shared with client/subscriber VLANs. MVR is typically used for IPTV-like service. In a non-MVR environment, the IPTV source to different VLANs would make multiple copies based on how many client/subscriber VLANs it would deliver.

The IPTV actually delivers the same source with multiple IP streams, and the duplicated traffic occupies the bandwidth of the uplink port. Once the traffic becomes heavy, some unexpected lost or lag appears. However, after MVR is enabled, the client/subscriber VLANs are registered to the same source VLAN, and then only one source stream will be delivered to the registered VLANs.

This page provides MVR-related configurations.

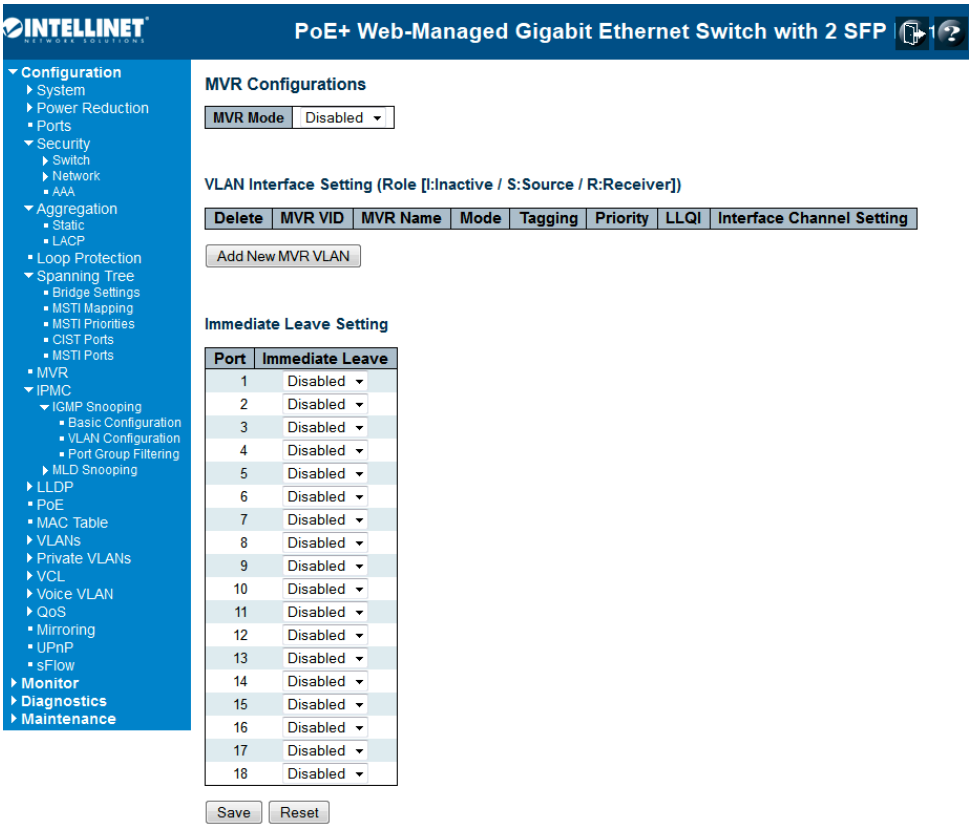

Most of the settings are global, whereas the Router Port configuration is related to the currently selected stack unit, as reflected by the page header.

The MVR feature enables multicast traffic forwarding on the Multicast VLAN. In a multicast television application, a PC or a television with a set-top box can receive the multicast stream. Multiple set-top boxes or PCs can be connected to one subscriber port, which is a switch port configured as an MVR receiver port. When a subscriber selects a channel, the set-top box or PC sends an IGMP join message to Switch A to join the appropriate multicast. Uplink ports that send and receive multicast data to and from the multicast VLAN are called MVR source ports.

MVR Mode

Enable/Disable the Global MVR.

VLAN ID

Specify the Multicast VLAN ID.

Mode

Enable MVR on the port.

Type

Specify the MVR port type on the port.

Immediate Leave

Enable the fast leave on the port.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.9 IPMC (IP Multicast)

IPMC is short for IP Multicast, in which the switch supports IPv4 and IPv6 multicast forwarding and filtering. IGMP Snooping defines how to manage IPv4 multicast traffic; MLD defines how to manage IPv6 multicast traffic.

4.9.1 IGMP Snooping Configuration

Internet Group Management Protocol Snooping (IGMP Snooping) is a multicast constraining mechanism that runs on Layer 2 devices to manage and control multicast groups. By listening to and analyzing IGMP messages, a Layer 2 device running IGMP Snooping establishes mappings between ports and multicast MAC addresses and forwards multicast data based on these mappings.

4.9.1.1 Basic Configuration

This page provides IGMP Snooping-related configuration.

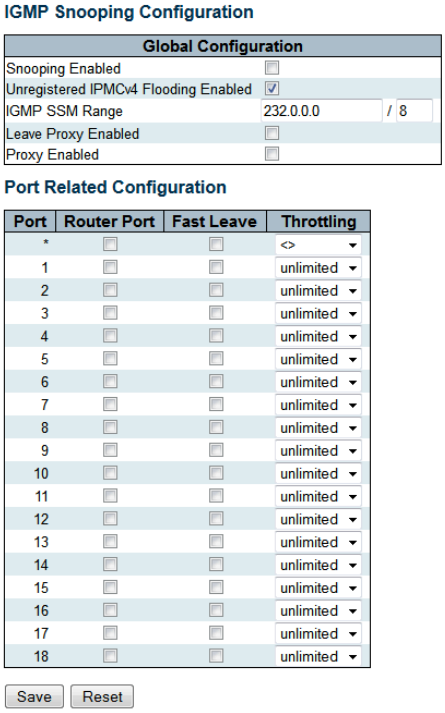

Global Configuration

Snooping Enabled

Enable Global IGMP Snooping.

Unregistered IPMCv4 Flooding enabled

Enable unregistered IPMCv4 traffic flooding. Unregistered IPMCv4 traffic is so-called unknown multicast. After selected, the unregistered multicast stream will be forwarded like normal packets. Once you un-selected it, such streams will be discarded.

IGMP SSM Range

SSM (Source-Specific Multicast) Range allows the SSM-aware hosts and routers to run the SSM service model for the groups in the address range.

Leave Proxy Enabled

Enable IGMP Leave Proxy. This feature can be used to avoid forwarding unnecessary leave messages to the router side.

Proxy Enabled

Enable IGMP Proxy. This feature can be used to avoid forwarding unnecessary join and leave messages to the router side.

Port Related Configuration

Router Port

Specify which ports act as router ports. A router port is a port on the Ethernet switch that leads toward the Layer 3 multicast device or MLD querier. Normally, the router port is the uplink port to the upper L3 Router or IGMP Querier. For example, in below figure, the green ports of the 2 switches are Router ports.

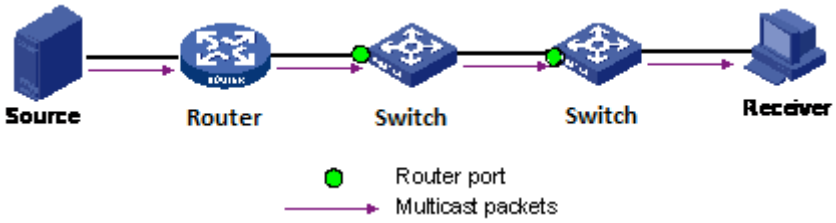

If an aggregation member port is selected as a router port, the whole aggregation will act as a router port.

Fast Leave

Enable the fast leave on the port.
Multicast snooping Fast Leave processing allows the switch to remove an interface from the forwarding-table entry without first sending out group specific queries to the interface. The VLAN interface is pruned from the multicast tree for the multicast group specified in the original leave message.
Fast-leave processing ensures optimal bandwidth management for all hosts on a switched network, even when multiple multicast groups are in use simultaneously. This processing applies to IGMP and MLD.

Throttling

Enable to limit the number of multicast groups to which a switch port can belong.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.9.1.2 IGMP Snooping VLAN Configuration

Navigating the IGMP Snooping VLAN Table

Each page shows up to 99 entries from the VLAN table (the default being 20) selected through the "entries per page" input field. When first visited, the Web page will show the first 20 entries from the beginning of the VLAN Table. The first displayed will be the one with the lowest VLAN ID found in the VLAN Table.
The "VLAN" input fields allow the user to select the starting point in the VLAN Table. Clicking the button will update the displayed table starting from that or the next-closest VLAN Table match.
The last entry of the currently displayed entry is used as a basis for the next lookup. When the end is reached, "No more entries" appears in the displayed table. Use the button to start over.

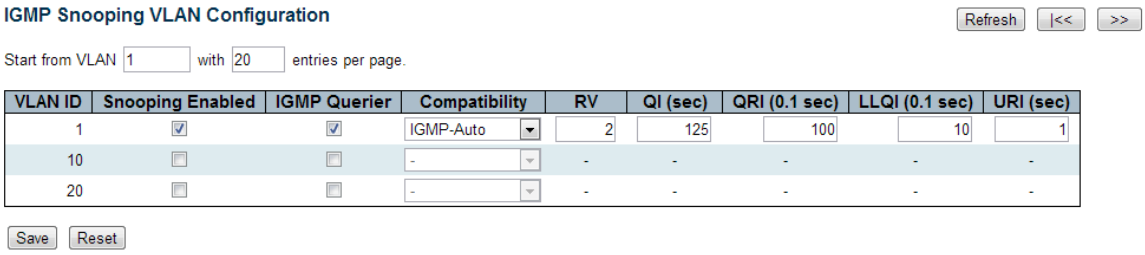

IGMP Snooping VLAN Table Columns

VLAN ID

The VLAN ID of the entry.

IGMP Snooping Enabled

Enable the per-VLAN IGMP Snooping. Only up to 64 VLANs can be selected.

IGMP Querier

Enable the IGMP Querier in the VLAN.

Compatibility

Compatibility is maintained by hosts and routers taking appropriate actions depending on the versions of IGMP operating on hosts and routers within a network. Allowed selections are **IGMP-Auto, Forced IGMPv1, Forced IGMPv2** and **Forced IGMPv3**. The default compatibility value is IGMP-Auto.

RV

Robustness Variable. The Robustness Variable allows tuning for the expected packet loss on a network. The allowed range is **1** to **255**. The default robustness variable value is 2.

QI

Query Interval. The Query Interval is the interval between General Queries sent by the Querier. The allowed range is **1** to **31744** seconds. The default query interval is 125 seconds.

QRI

Query Response Interval. The Max Response Time used to calculate the Max Resp Code inserted into the periodic General Queries. The allowed range is **0** to **31744** in tenths of seconds. The default query response interval is 100 in tenths of seconds (10 seconds).

LLQI (LMQI for IGMP)

Last Member Query Interval. The Last Member Query Time is the time value represented by the Last Member Query Interval, multiplied by the Last Member Query Count. The allowed range is **0** to **31744** in tenths of seconds. The default last member query interval is 10 in tenths of seconds (1 second).

URI

Unsolicited Report Interval. The Unsolicited Report Interval is the time between repetitions of a host's initial report of membership in a group. The allowed range is **0** to **31744** seconds. The default unsolicited report interval is 1 second.

Buttons

Refresh : Refreshes the displayed table starting from the “VLAN” input fields.
<< : Updates the table starting from the first entry in the VLAN Table; i.e., the entry with the lowest VLAN ID.
>>: Update the table, staring with the entry after the last entry currently displayed.
Save: To save the configuration.
Reset: Click to undo any changes made locally and revert to previously saved values.

4.9.1.3 IGMP Snooping / Port Group Filtering

IGMP Snooping Port Group Filtering Configuration

Delete

Check to delete the entry. It will be deleted during the next save.

Port

The logical port for the settings.

Filtering Groups

The IP Multicast Group that will be filtered.

Adding New Filtering Group

Click to add a new entry to the Group Filtering table. Specify the Port and Filtering Group of the new entry. Click "Save."

Warning message about the Filtering Group.
The range of the IP Multicast is 224.0.0.0 - 239.255.255.255.

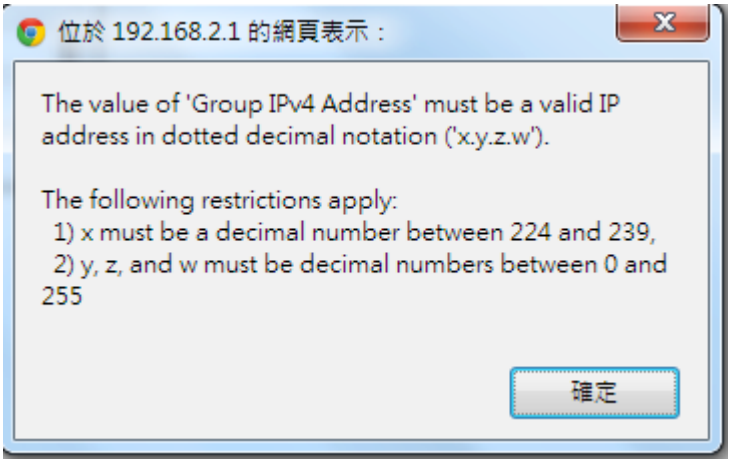
位於 192.168.2.1 的網頁表示：
The value of 'Group IPv4 Address' must be a valid IP address in dotted decimal notation ('x.y.z.w').
The following restrictions apply:
1) x must be a decimal number between 224 and 239,
2) y, z, and w must be decimal numbers between 0 and 255
確定

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.9.2 MLD Snooping Configuration

This section provides MLD Snooping-related configuration. The MLD is for IPv6 Multicast Snooping. The difference between the 2 IGMP and MLD is that the IGMP is applied to IPv4 Multicast stream while the MLD is applied to IPv6 Multicast stream. While configuring the MLD Snooping configuration, the only thing you need to understand is the IPv6 packet format.

4.9.2.1 Basic Configuration

This is basic configuration of the MLD, IPv6 Multicast Routing.
Most of the settings are global, whereas the Router Port configuration is related to the currently selected stack unit, as reflected by the page header.

Snooping Enabled

Enable Global MLD Snooping.

Unregistered IPMCv6 Flooding enabled

Enable unregistered IPMCv6 traffic flooding. Note that disabling unregistered IPMCv6 traffic flooding may lead to failure of Neighbor Discovery.

SSM Range

SSM (Source-Specific Multicast) Range allows the SSM-aware hosts and routers to run the SSM service model for the groups in the address range.

Leave Proxy Enabled

Enable MLD Leave Proxy. This feature can be used to avoid forwarding unnecessary leave messages to the router side.

Proxy Enabled

Enable MLD Proxy. This feature can be used to avoid forwarding unnecessary join and leave messages to the router side.

Router Port

Specify which ports act as router ports. A router port is a port on the Ethernet switch that leads toward the Layer 3 multicast device or MLD querier. Normally, the router port is the uplink port to the upper L3 Router or IGMP Querier. For example, in below figure, the green ports of the 2 switches are Router ports.

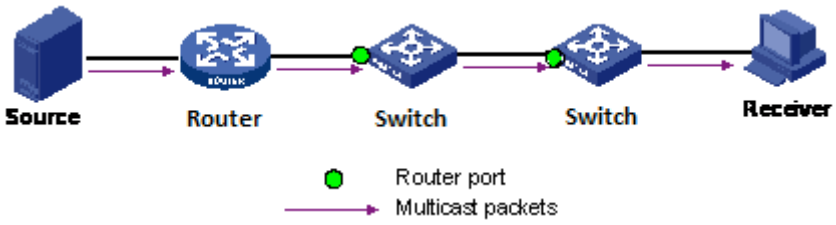

If an aggregation member port is selected as a router port, the whole aggregation will act as a router port.

Fast Leave

Enable the fast leave on the port.

Throttling

Enable to limit the number of multicast groups to which a switch port can belong.

Buttons

Save: Click to save changes.
Reset: Click to undo any changes made locally and revert to previously saved values.

4.9.2.2 MLD Snooping VLAN Configuration

Navigating the MLD Snooping VLAN Table

Each page shows up to 99 entries from the VLAN table (the default being 20) selected through the "entries per page" input field. When first visited, the Web page will show the first 20 entries from the beginning of the VLAN Table. The first displayed will be the one with the lowest VLAN ID found in the VLAN Table.
The "VLAN" input fields allow the user to select the starting point in the VLAN Table. Clicking the button will update the displayed table starting from that or the next-closest VLAN Table match.
The last entry of the currently displayed entry is used as a basis for the next lookup. When the end is reached, "No more entries" appears in the displayed table. Use the button to start over.

MLD Snooping VLAN Table Columns

VLAN ID

The VLAN ID of the entry.

MLD Snooping Enabled

Enable the per-VLAN MLD Snooping. Up to 64 VLANs can be selected.

MLD Querier

Enable the IGMP Querier in the VLAN.

Compatibility

Compatibility is maintained by hosts and routers taking appropriate actions depending on the versions of MLD operating on hosts and routers within a network. Allowed selections are **MLD-Auto**, **Forced MLDv1** and **Forced MLDv2**. The default compatibility value is MLD-Auto.

RV

Robustness Variable. The Robustness Variable allows tuning for the expected packet loss on a link. The allowed range is **1** to **255**. The default robustness variable value is 2.

QI

Query Interval. The Query Interval variable denotes the interval between General Queries sent by the Querier. The allowed range is **1 to 31744** seconds. The default query interval is 125 seconds.

QRI

Query Response Interval. The Maximum Response Delay used to calculate the Maximum Response Code inserted into the periodic General Queries. The allowed range is **0** to **31744** in tenths of seconds. The default query response interval is 100 in tenths of seconds (10 seconds).

LLQI

Last Listener Query Interval. The Last Listener Query Interval is the Maximum Response Delay used to calculate the Maximum Response Code inserted into Multicast Address Specific Queries sent in response to Version 1 Multicast Listener Done messages. It is also the Maximum Response Delay used to calculate the Maximum Response Code inserted into Multicast Address and Source Specific Query messages. The allowed range is **0** to **31744** in tenths of seconds. The default last listener query interval is 10 in tenths of seconds (1 second).

URI

Unsolicited Report Interval. The Unsolicited Report Interval is the time between repetitions of a node's initial report of interest in a multicast address. The allowed range is **0** to **31744** seconds. The default unsolicited report interval is 1 second.

Buttons

Refresh : Refreshes the displayed table starting from the “VLAN” input fields.

<< : Updates the table starting from the first entry in the VLAN Table; i.e., the entry with the lowest VLAN ID.

>>: Update the table, staring with the entry after the last entry currently displayed.

4.9.2.3 IPMC / MLD Snooping / Port Group Filtering

MLD Snooping Port Group Filtering Configuration

Delete

Check to delete the entry. It will be deleted during the next save.

Port

The logical port for the settings.

Filtering Groups

The IP Multicast Group that will be filtered.

Adding New Filtering Group

Click to add a new entry to the Group Filtering table. Specify the Port and Filtering Group for the new entry. Click "Save."

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.10 LLDP Parameters

The **Link Layer Discovery Protocol (LLDP)** is a vendor-neutral link layer protocol. LLDP information is sent by devices from each of their interfaces at a fixed interval, in the form of an Ethernet Frame. Each frame contains one **LLDP Data Unit (LLDPDU)**. Each LLDPDU is a sequence of **Type-Length-Value (TLV)** structures. Each LLDP frame starts with the following mandatory TLVs: *Chassis ID*, *Port ID* and *Time-to-Live*. The mandatory TLVs are followed by any number of optional TLVs.

This section allows you to inspect and configure the current LLDP port settings.

4.10.1 LLDP Configuration

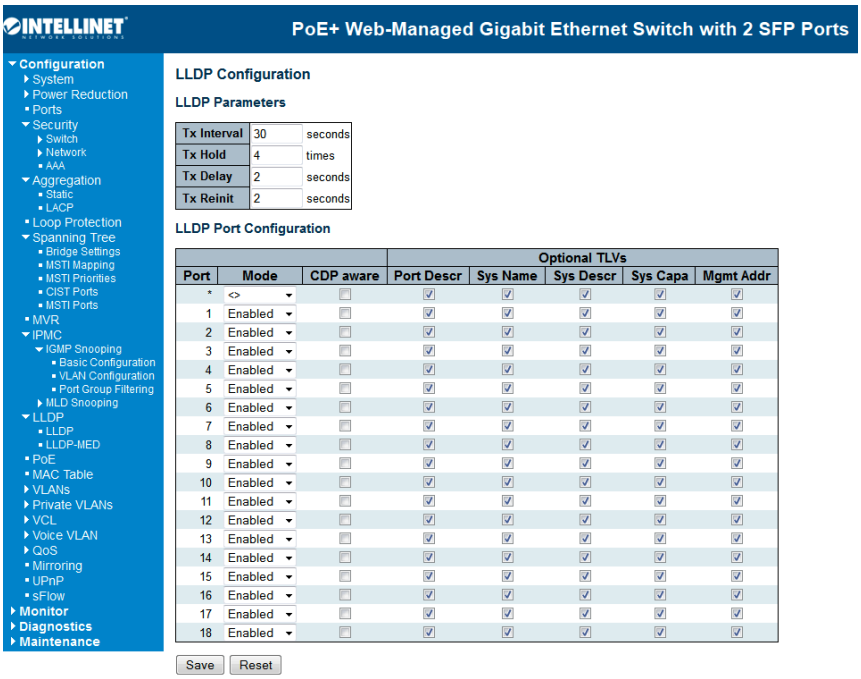

Tx Interval

The switch periodically transmits LLDP frames to its neighbors for having the network discovery information up to date. The interval between each LLDP frame is determined by the **Tx Interval** value. Valid values are restricted to 5 - 32768 seconds.

Tx Hold

Each LLDP frame contains information about how long the information in the LLDP frame shall be considered valid. The LLDP information valid period is set to **Tx Hold** multiplied by **Tx Interval** seconds. Valid values are restricted to 2 - 10 times.

Tx Delay

If some configuration is changed (e.g., the IP address) a new LLDP frame is transmitted, but the time between the LLDP frames will always be at least the value of **Tx Delay** seconds. **Tx Delay** cannot be larger than 1/4 of the **Tx Interval** value. Valid values are restricted to 1 - 8192 seconds.

Tx Reinit

When a port is disabled, LLDP is disabled or the switch is rebooted, an LLDP shutdown frame is

transmitted to the neighboring units, signalling that the LLDP information isn't valid anymore. **Tx Reinit** controls the amount of seconds between the shutdown frame and a new LLDP initialization. Valid values are restricted to 1 - 10 seconds.

LLDP Port Configuration

The LLDP port settings relate to the currently selected stack unit, as reflected by the page header.

Port

The switch port number of the logical LLDP port.

Mode

Select LLDP mode.

Rx only The switch will not send out LLDP information, but LLDP information from neighbor units is analyzed.

Tx only The switch will drop LLDP information received from neighbors, but will send out LLDP information.

Disabled The switch will not send out LLDP information, and will drop LLDP information received from neighbors.

Enabled The switch will send out LLDP information, and will analyze LLDP information received from neighbors.

CDP Aware

Select CDP awareness.

The CDP operation is restricted to decoding incoming CDP frames. (The switch doesn't transmit CDP frames.) CDP frames are only decoded if LLDP on the port is enabled.

Only CDP TLVs that can be mapped to a corresponding field in the LLDP neighbors' table are decoded. All other TLVs are discarded. (Unrecognized CDP TLVs and discarded CDP frames are not shown in the LLDP statistics.) CDP TLVs are mapped onto LLDP neighbors' table as shown below.

CDP TLV "Device ID" is mapped to the LLDP "Chassis ID" field.

CDP TLV "Address" is mapped to the LLDP "Management Address" field. The CDP address TLV can contain multiple addresses, but only the first address is shown in the LLDP neighbors table.

CDP TLV "Port ID" is mapped to the LLDP "Port ID" field.

CDP TLV "Version and Platform" is mapped to the LLDP "System Description" field.

Both the CDP and LLDP support "system capabilities," but the CDP capabilities cover capabilities that are not part of the LLDP. These capabilities are shown as "others" in the LLDP neighbors' table.

If all ports have CDP awareness disabled, the switch forwards CDP frames received from neighbor devices. If at least one port has CDP awareness enabled, all CDP frames are terminated by the switch.

Note: When CDP awareness on a port is disabled, the CDP information isn't removed immediately, but gets removed when the hold time is exceeded.

Port Descr

Optional TLV: When checked, the "port description" is included in LLDP information transmitted.

Sys Name

Optional TLV: When checked, the "system name" is included in LLDP information transmitted.

Sys Descr

Optional TLV: When checked, the "system description" is included in LLDP information transmitted.

Sys Capa

Optional TLV: When checked, the "system capability" is included in LLDP information transmitted.

Mgmt Addr

Optional TLV: When checked, the "management address" is included in LLDP information transmitted.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.10.2 LLDP Media Configuration

This page allows you to configure the LLDE-MED. This function applies to VoIP devices which support LLDP-MED.

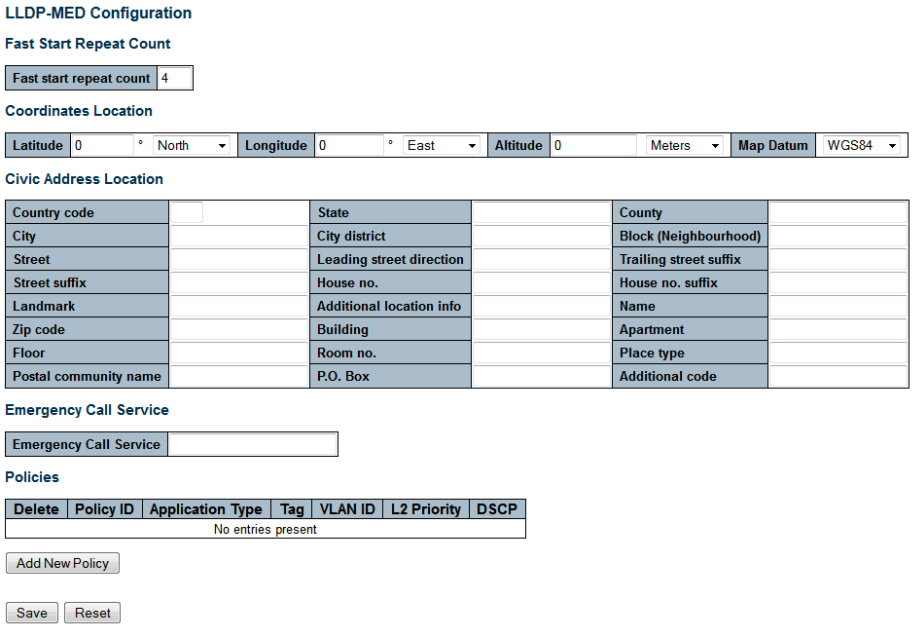
LLDP-MED Configuration
Fast Start Repeat Count
Fast start repeat count 4
Coordinates Location
Latitude 0 ° North Longitude 0 ° East Altitude 0 Meters Map Datum WGS84
Civic Address Location
Country code State County
City City district Block (Neighbourhood)
Street Leading street direction Trailing street suffix
Street suffix House no. House no. suffix
Landmark Additional location info Name
Zip code Building Apartment
Floor Room no. Place type
Postal community name P.O. Box Additional code
Emergency Call Service
Emergency Call Service
Policies
Delete Policy ID Application Type Tag VLAN ID L2 Priority DSCP
No entries present
Add New Policy
Save Reset

Fast start repeat count

Fast start repeat count

Rapid startup and Emergency Call Service Location Identification Discovery of endpoints is a critically important aspect of VoIP systems in general. In addition, it is best to advertise only those pieces of information which are specifically relevant to particular endpoint types (for example, only advertise the voice network policy to permitted voice-capable devices), both in order to conserve the limited LLDPU space and to reduce security and system integrity issues that can come with inappropriate knowledge of the network policy.

With this in mind, LLDP-MED defines an LLDP-MED Fast Start interaction between the protocol and the application layers on top of the protocol in order to achieve these related properties. Initially, a Network Connectivity Device will only transmit LLDP TLVs in an LLDPDU. Only after an LLDP-MED Endpoint Device is detected will an LLDP-MED capable Network Connectivity Device start to advertise LLDP-MED TLVs in outgoing LLDPDUs on the associated port. The LLDP-MED application will temporarily speed up the transmission of the LLDPDU to start within a second, when a new LLDP-MED neighbor has been detected in order share LLDP-MED information as fast as possible to new neighbors.

Because there is a risk of an LLDP frame being lost during transmission between neighbors, it is recommended to repeat the fast start transmission multiple times to increase the possibility of the neighbors receiving the LLDP frame. With **Fast start repeat count**, it is possible to specify the number of times the fast start transmission would be repeated. The recommended value is four times, given that four LLDP frames with a 1-second interval will be transmitted,when an LLDP frame with new information is received.

It should be noted that LLDP-MED and the LLDP-MED Fast Start mechanism are only intended to run on links between LLDP-MED Network Connectivity Devices and Endpoint Devices, and as such do not apply to links between LAN infrastructure elements, including Network Connectivity Devices, or other types of links.

Coordinates Location

Latitude

Latitude Should be normalized to within 0-90 degrees with a maximum of four digits.
It is possible to specify the direction to either north of the equator or south of the equator.

Longitude

Longitude Should be normalized to within 0-180 degrees with a maximum of four digits.

It is possible to specify the direction the either east of the prime meridian or west of the prime meridian.

Altitude

Altitude SHOULD be normalized to within -32767 to 32767 with a maximum of four digits.

It is possible to select between two altitude types (floors or meters).

Meters: Representing meters of Altitude defined by the vertical datum specified.

Floors: Representing altitude in a form more relevant in buildings which have different floor-to-floor dimensions. An altitude = 0.0 is meaningful even outside a building, and represents ground level at the given latitude and longitude. Inside a building, 0.0 represents the floor level associated with ground level at the main entrance.

Map Datum

The **Map Datum** is used for the coordinates given in these options:

WGS84: (Geographical 3D) - World Geodesic System 1984, CRS Code 4327, Prime Meridian Name: Greenwich.

NAD83/NAVD88: North American Datum 1983, CRS Code 4269, Prime Meridian Name: Greenwich; The associated vertical datum is the North American Vertical Datum of 1988 (NAVD88). This datum pair is to be used when referencing locations on land, not near tidal water (which would use Datum = NAD83/MLLW).

NAD83/MLLW: North American Datum 1983, CRS Code 4269, Prime Meridian Name: Greenwich; The associated vertical datum is Mean Lower Low Water (MLLW). This datum pair is to be used when referencing locations on water/sea/ocean.

Civic Address Location

IETF Geopriv Civic Address based Location Configuration Information (Civic Address LCI).

Country code

The two-letter ISO 3166 Country code in capital ASCII letters – Example: DK, DE or US.

State

National subdivisions (state, canton, region, province, prefecture).

County

County, parish, gun (Japan), district.

City

City, township, shi (Japan) – Example: Copenhagen.

City district

City division, borough, city district, ward, chou (Japan).

Block (Neighborhood)

Neighborhood block.

Street

Street –Example : Poppelvej.

Leading Street Direction

Leading street direction – Example: N.

Trailing street suffix

Trailing street suffix – Example: SW.

Street suffix

Street suffix – Example : Ave, Platz.

House no.

House number – Example: 21.

House no. suffix

House number suffix – Example: A, ½.

Landmark

Landmark or vanity address – Example: Columbia University.

Additional location info.

Additional location info – Example: South Wing.

Name

Name (residence and office occupant) – Example: Flemming Jahn.

Zip code

Postal / ZIP code – Example: 2791.

Building

Building (structure) – Example: Low Library.

Apartment

Unit (Apartment, suite) – Example: Apt 42.

Floor

Floor – Example: 4.

Room No.

Room number – Example: 450F.

Place type

Place type – Example: Office.

Postal community name

Postal community name – Example: Leonia.

P.O. Box

Post office box (P.O. Box) – Example : 12345.

Additional code

Additional code – Example: 1320300003.

Emergency Call Service

Emergency Call Service (e.g., E911 and others), such as defined by TIA or NENA.

Emergency Call Service

Emergency Call Service ELIN identifier data format is defined to carry the ELIN identifier as used during emergency call setup to a traditional CAMA or ISDN trunk-based PSAP. This format consists of a numerical digit string, corresponding to the ELIN to be used for emergency calling.

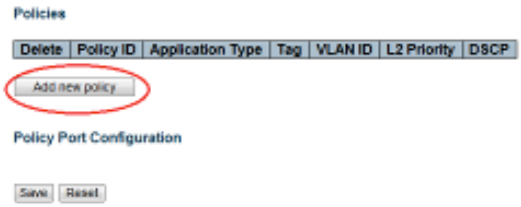

Policies

Network Policy Discovery enables the efficient discovery and diagnosis of mismatch issues with the VLAN configuration, along with the associated Layer 2 and Layer 3 attributes, which apply for a set of specific protocol applications on that port. Improper network policy configurations are a very significant issue in VoIP environments that frequently result in voice quality degradation or loss of service.

Policies are only intended for use with applications that have specific “real-time” network policy requirements, such as interactive voice and/or video services.

The network policy attributes advertised:

1. Layer 2 VLAN ID (IEEE 802.1Q-2003)

2. Layer 2 priority value (IEEE 802.1D-2004)

3. Layer 3 Diffserv code point (DSCP) value (IETF RFC 2474)

This network policy is potentially advertised and associated with multiple sets of application types supported on a given port. The application types specifically addressed:

1. Voice
2. Guest Voice
3. Softphone Voice
4. Video Conferencing
5. Streaming Video
6. Control / Signalling (Conditionally support a separate network policy for the media types above)

A large network may support multiple VoIP policies across the entire organization, and different policies per application type. LLDP-MED allows multiple policies to be advertised per port, each corresponding to a different application type. Different ports on the same Network Connectivity Device may advertise

different sets of policies, based on the authenticated user identity or port configuration.

It should be noted that LLDP-MED is not intended to run on links other than between Network Connectivity Devices and Endpoints, and therefore does not need to advertise the multitude of network policies that frequently run on an aggregated link interior to the LAN.

Delete

Check to delete the policy. It will be deleted during the next save.

Policy ID

ID for the policy. This is auto-generated and shall be used when selecting the polices that shall be mapped to the specific ports.

Application Type

Intended use of the application types:

1. **Voice** - for use by dedicated IP Telephony handsets and other similar appliances supporting interactive voice services. These devices are typically deployed on a separate VLAN for ease of deployment and enhanced security by isolation from data applications.

2. **Voice Signaling** (conditional) - for use in network topologies that require a different policy for the voice signaling than for the voice media. This application type should not be advertised if all the same network policies apply as those advertised in the **Voice** application policy.

3. **Guest Voice** - support a separate “limited feature-set” voice service for guest users and visitors with their own IP Telephony handsets and other similar appliances supporting interactive voice services.

4. **Guest Voice Signaling** (conditional) - for use in network topologies that require a different policy for the guest voice signaling than for the guest voice media. This application type should not be advertised if all the same network policies apply as those advertised in the **Guest Voice** application policy.

5. **Softphone Voice** - for use by softphone applications on typical data centric devices, such as PCs or laptops. This class of endpoints frequently does not support multiple VLANs, if at all, and are typically configured to use an “untagged” VLAN or a single “tagged” data-specific VLAN. When a network policy is defined for use with an untagged VLAN (see Tagged flag below), then the L2 priority field is ignored and only the DSCP value has relevance.

6. **Video Conferencing** - for use by dedicated Video Conferencing equipment and other similar appliances supporting real-time interactive video/audio services.

7. **Streaming** Video - for use by broadcast- or multicast-based video content distribution and other similar applications supporting streaming video services that require specific network policy treatment. Video applications relying on TCP with buffering would not be an intended use of this application type.

8. **Video Signalling** (conditional) - for use in network topologies that require a separate policy for the video signalling than for the video media. This application type should not be advertised if all the same network policies apply as those advertised in the **Video Conferencing** application policy.

Tag

Tag indicating whether the specified application type is using a tagged or an untagged VLAN.

Untagged indicates that the device is using an untagged frame format and as such does not include a tag header as defined by IEEE 802.1Q-2003. In this case, both the VLAN ID and the Layer 2 priority

fields are ignored and only the DSCP value has relevance.

Tagged indicates that the device is using the IEEE 802.1Q tagged frame format, and that both the VLAN ID and the Layer 2 priority values are being used, as well as the DSCP value. The tagged format includes an additional field, known as the tag header. The tagged frame format also includes priority tagged frames as defined by IEEE 802.1Q-2003.

VLAN ID

VLAN identifier (VID) for the port as defined in IEEE 802.1Q-2003.

L2 Priority

L2 Priority is the Layer 2 priority to be used for the specified application type. **L2 Priority** may specify one of eight priority levels (0 through 7), as defined by IEEE 802.1D-2004. A value of 0 represents use of the default priority as defined in IEEE 802.1D-2004.

DSCP

DSCP value to be used to provide Diffserv node behavior for the specified application type as defined in IETF RFC 2474. **DSCP** may contain one of 64 code point values (0 through 63). A value of 0 represents use of the default DSCP value as defined in RFC 2475.

Adding a new policy

Click to add a new policy. Specify the **Application type**, **Tag**, **VLAN ID**, **L2 Priority** and **DSCP** for the new policy. Click "Save."

Port Policies Configuration

Every port may advertise a unique set of network policies or different attributes for the same network policies, based on the authenticated user identity or port configuration.

Port

The port number to which the configuration applies.

Policy ID

The set of policies that shall apply to a given port. The set of policies is selected by check marking the check boxes that correspond to the policies.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.11 PoE Configuration

The function is applied to the PoE Switch model. If your switch is not a PoE switch, you will not see these configuration commands.

This section allows you to inspect and configure the current port settings.

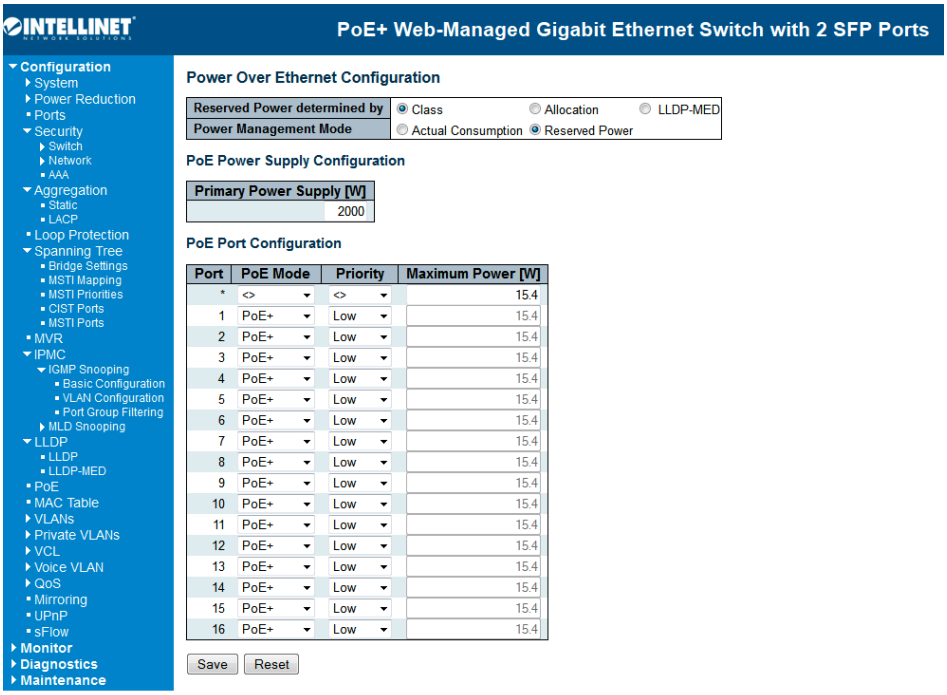

Power Over Ethernet Configuration

Reserved Power determined by

There are three modes for configuring how the ports/PDs may reserve power.

1. **Allocation mode:** In this mode, you allocate the amount of power that each port may reserve. The allocated/reserved power for each port/PD is specified in the Maximum Power fields.

2. **Class mode:** In this mode, each port automatically determines how much power to reserve according to the class the connected PD belongs to, and reserves the power accordingly. Four different port classes exist, and one for 4, 7, 15.4 or 30 watts.

In this mode, the Maximum Power fields have no effect.

3. **LLDP-MED mode:** This mode is similar to the Class mode except that each port determines the amount of power it reserves by exchanging PoE information using the LLDP protocol and reserves power accordingly. If no LLDP information is available for a port, the port will reserve power using the class mode.

In this mode, the Maximum Power fields have no effect.

For all modes: If a port uses more power than the reserved power for the port, the port is shut down.

Power Management Mode

There are 2 modes for configuring when to shut down the ports:

1. **Actual Consumption:** In this mode, the ports are shut down when the actual power consumption for all ports exceeds the amount of power that the power supply can deliver or if the actual power consumption for a given port exceeds the reserved power for that port. The ports are shut down according to the ports priority. If two ports have the same priority, the port with the highest port number is shut down.

2. **Reserved Power:** In this mode, the ports are shut down when total reserved powered exceeds the amount of power that the power supply can deliver. In this mode, the port power is not turned on if the PD requests more power than available from the power supply.

PoE Power Supply Configuration

Primary Power Supply (W)

Some switches support having two PoE power supplies. One is used as primary power source, and one as a backup power source. If the switch doesn't support a backup power supply, only the primary power supply settings will be shown. In case the primary power source fails, the backup power source will take over. To be able to determine the amount of power the PD may use, the amount of power the primary and backup power sources can deliver must be defined.

The valid values in this field range from 0 to 2000; however, the valid range of the power supply is up to your product specification. Check the power budget of your switch and type the correct number here.

PoE Port Configuration

Port

This is the logical port number for this row.

Ports that are not PoE-capable are grayed out and thus impossible to configure for PoE.

PoE Mode

The **PoE Mode** represents the PoE operating mode for the port.

Disabled: PoE disabled for the port.

PoE: Enables PoE IEEE 802.3af (Class 4 PDs limited to 15.4 W).

PoE+: Enables PoE+ IEEE 802.3at (Class 4 PDs limited to 30 W).

Priority

The **Priority** represents the ports priority. There are three levels of power priority: Low, High and Critical.

The priority is used in the case where the remote devices requires more power than the power supply can deliver. In this case, the port with the lowest priority will be turned off starting from the port with the highest port number.

Maximum Power

The **Maximum Power** value contains a numerical value that indicates the maximum power in watts that can be delivered to a remote device.

The maximum allowed value is 30 W.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.12 MAC Address Table Configuration

The MAC Address Table is configured on this page. Set timeouts for entries in the dynamic MAC Table and configure the static MAC table here.

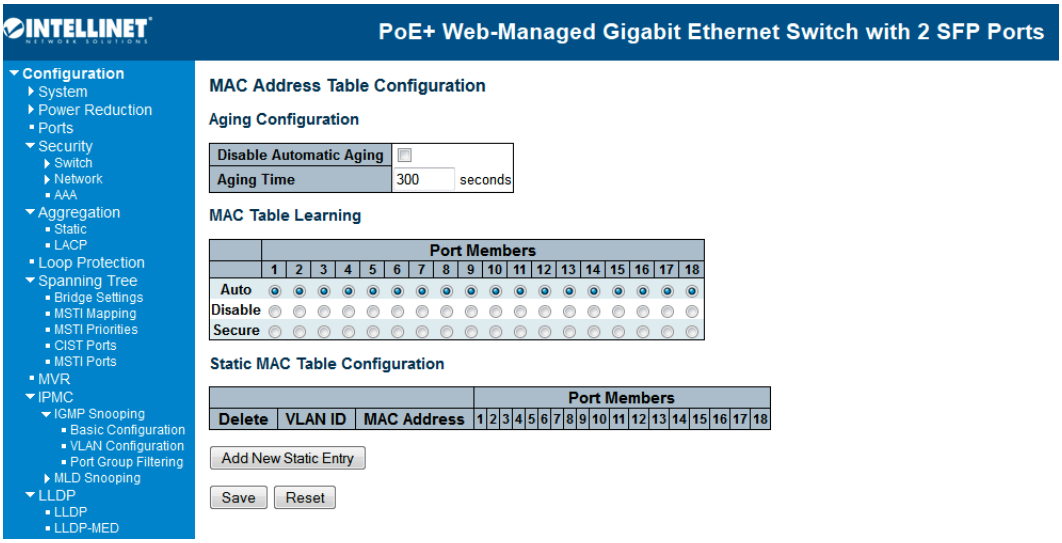

Aging Configuration

By default, dynamic entries are removed from the MAC table after 300 seconds. This removal is also called aging.

Configure aging time by entering a value here in seconds.
The allowed range is **10** to **1000000** seconds.

Disable the automatic aging of dynamic entries by checking ☐ Disable automatic aging.

MAC Table Learning

If the learning mode for a given port is grayed out, another module is in control of the mode so that it cannot be changed. An example of such a module is the MAC-Based Authentication under 802.1X. Each port can do learning based upon the following settings:

Auto

Learning is done automatically as soon as a frame with unknown SMAC is received.

Disable

No learning is done.

Secure

Only static MAC entries are learned; all other frames are dropped.
Note: Make sure that the link used for managing the switch is added to the Static Mac Table before changing to secure learning mode, otherwise the management link is lost and can only be restored by using another non-secure port or by connecting to the switch via the serial interface.

Static MAC Table Configuration

The static entries in the MAC table are shown in this table. The static MAC table can contain 64 entries.

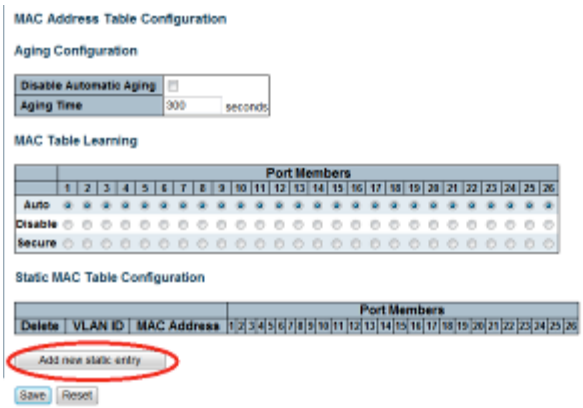

The table is sorted first by VLAN ID and then by MAC address.

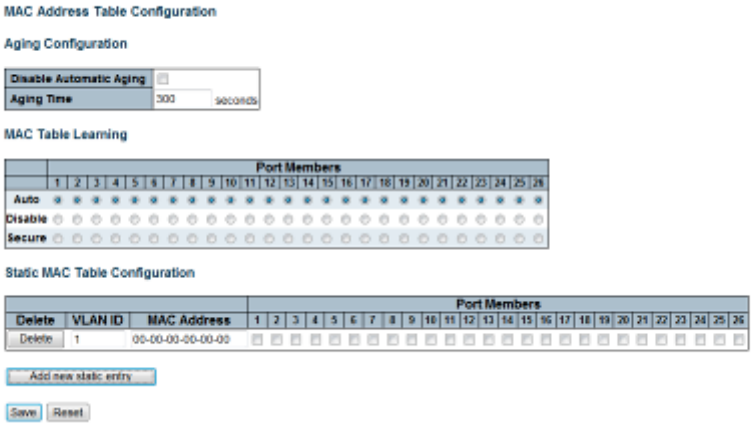

Delete

Check to delete the entry. It will be deleted during the next save.

VLAN ID

The VLAN ID of the entry.

MAC Address

The MAC address of the entry.

Port Members

Checkmarks indicate which ports are members of the entry. Check or uncheck as needed to modify the entry.

Adding a New Static Entry

Click to add a new entry to the static MAC table. Specify the VLAN ID, MAC address and port members for the new entry. Click "Save."

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.13 VLAN (Virtual LAN)

VLAN is short for Virtual LAN (Local Area Network.) VLAN technology allows you to divide the physical ports into different logical groups. Each group is a virtual LAN, and the clients within the VLAN are a broadcast domain. While the clients in different VLANs need to communicate, the VLAN Overlapping setting or a additional upper router is needed.

There are 2 typical types of VLAN technology: Port-Based and Tag-Based. The port-based VLAN is the simplest approach to LAN implementation. The idea is to assign the ports on a switch to different VLANs. The settings are only applied to the ports of the switch.

Tag-based VLAN follows IEEE 802.1Q technology to tag VLAN IDs to the packets. The tagged VID is not only applied to the switch, but also can be forwarded to the next switch and a whole network, depending on how you've configured the switch settings.

4.13.1 VLAN Membership Configuration

The VLAN membership configuration for the switch can be monitored and modified here. Up to 4096 VLANs are supported. This page allows for adding and deleting VLANs as well as adding and deleting port members of each VLAN.

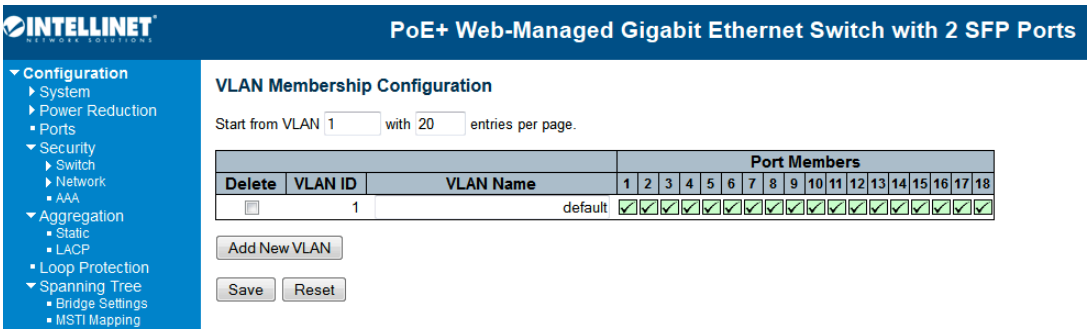

Navigating the VLAN Table

Each page shows up to 99 entries from the VLAN table (the default being 20) selected through the "entries per page" input field. When first visited, the Web page will show the first 20 entries from the beginning of the VLAN Table. The first displayed will be the one with the lowest VLAN ID found in the VLAN Table.
The "VLAN" input fields allow the user to select the starting point in the VLAN Table. Clicking the button will update the displayed table starting from that or the closest next VLAN Table match. The last entry of the currently displayed VLAN entry is used as a basis for the next lookup. When the end is reached, "No more entries" appears in the displayed table. Use the button to start over.

Delete

To delete a VLAN entry, check this box. The entry will be deleted during the next Save.

VLAN ID

Indicates the ID of this particular VLAN.

VLAN Name

Indicates the name of the VLAN. Maximum length of the VLAN Name String is 32. VLAN Name can only contain letters or numbers. A VLAN name should contain at least one letter. A VLAN name can be edited for the existing VLAN entries or it can be added to the new entries.

Port Members

A row of check boxes for each port is displayed for each VLAN ID.
To include a port in a VLAN, check the box as ✓.
To include a port in a forbidden port list, check the box as shown ✕.
To remove or exclude the port from the VLAN, make sure the box is unchecked as shown.
By default, no ports are members, and for every new VLAN entry all boxes are unchecked.

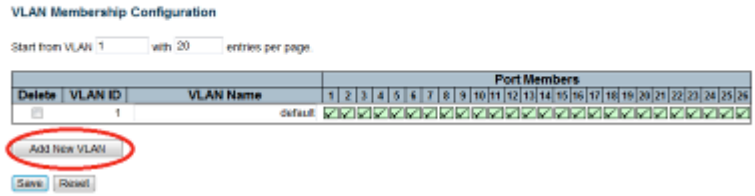
VLAN Membership Configuration
Start from VLAN 1 with 20 entries per page
Delete
VLAN ID
VLAN Name
Port Members
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26
1
default
Add New VLAN
Save
Reset

Adding a New VLAN

Click to add a new VLAN ID. An empty row is added to the table, and the VLAN can be configured as needed. Legal values for a VLAN ID are **1** through **4095.**

The VLAN is enabled when you click on "Save." A VLAN without any port members will be deleted when you click "Save."

The button can be used to undo the addition of new VLANs.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Refreshes : Refreshes the displayed the table starting from the “VLAN ID” input fields.

<< : Updates the table starting from the first entry in the VLAN Table; i.e., the entry with the lowest VLAN ID.

>>: Update the table, staring with the entry after the last entry currently displayed.

4.13.2 VLAN Port Configuration

This page is used for configuring the switch's port VLANs.

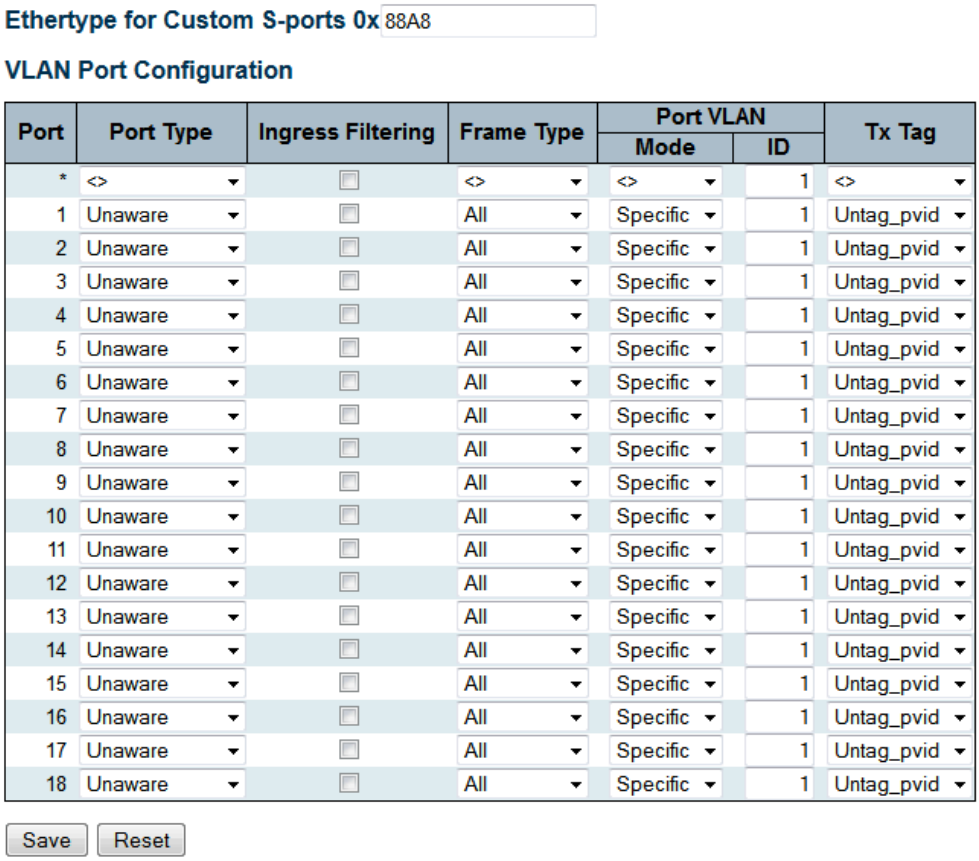

Ether type for Custom S-ports

This field specifies the ether type used for Custom S-ports. This is a global setting for all the Custom S-ports.

Port

This is the logical port number of this row.

Port Type

Port can be one of the following types: Unaware, Customer port (C-port), Service port (S-port), Custom Service port (S-custom-port)

If Port Type is Unaware, all frames are classified to the Port VLAN ID and tags are not removed.

Ingress Filtering

Enable ingress filtering on a port by checking the box. This parameter affects VLAN ingress processing. If ingress filtering is enabled and the ingress port is not a member of the classified VLAN of the frame, the frame is discarded. By default, ingress filtering is disabled (no checkmark).

Frame Type

Determines whether the port accepts all frames or only tagged/untagged frames. This parameter affects VLAN ingress processing. If the port only accepts tagged frames, untagged frames received on the port are discarded. By default, the field is set to **All**.

Port VLAN Mode

Configures the Port VLAN Mode. The allowed values are **None** or **Specific**. This parameter affects VLAN ingress and egress processing.

If **None** is selected, a VLAN tag with the classified VLAN ID is inserted in frames transmitted on the port. This mode is normally used for ports connected to VLAN-aware switches.

If **Specific** (the default value) is selected, a Port VLAN ID can be configured (see below). Untagged frames received on the port are classified to the Port VLAN ID. If VLAN awareness is disabled, all frames received on the port are classified to the Port VLAN ID. If the classified VLAN ID of a frame transmitted on the port is different from the Port VLAN ID, a VLAN tag with the classified VLAN ID is inserted in the frame.

Port VLAN ID

Configures the VLAN identifier for the port. The allowed values are **1** through **4095**. The default value is **1.**
Note: The port must be a member of the same VLAN as the Port VLAN ID.

Tx Tag

Determines egress tagging of a port. Untag_pvid - All VLANs except the configured PVID will be tagged. Tag_all - All VLANs are tagged. Untag_all - All VLANs are untagged.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.14 Private VLANs

The Private VLAN feature provides the ability to extend the capabilities of a "standard" VLAN. The additional concepts — Primary VLAN, Community VLAN and Isolated VLAN — are introduced in Private VLAN.

The Primary VLAN can be considered the master in the master/slave relationship with the other two sub-types, Community VLAN and Isolated VLAN. The switch Ports assigned with the primary VLAN are able to access the ports in the two sub-tyupes.

Both the Community VLN and Isolated VLAN can be considered slaves in the master/slave relationship with the primary VLAN. The switch ports assigned to a Community VLAN can see traffic from all other devices in the same Community. The switch ports assigned to an Isolated VLAN can send traffic to the primary VLAN, but CANNOT see traffic from other devices in the same Isolated VLAN.

In this section, the switch allows you to assign Private VLAN Member Configuration and Port Isolation Configuration.

4.14.1 Private VLAN Membership Configuration

The Private VLAN membership configurations for the switch can be monitored and modified here. Private VLANs can be added or deleted here. Port members of each Private VLAN can be added or removed here.

Private VLANs are based on the source port mask, and there are no connections to VLANs. This means that VLAN IDs and Private VLAN IDs can be identical.

A port must be a member of both a VLAN and a Private VLAN to be able to forward packets. By default, all ports are VLAN unaware and members of VLAN 1 and Private VLAN 1.

A VLAN-unaware port can only be a member of one VLAN, but it can be a member of multiple Private VLANs.

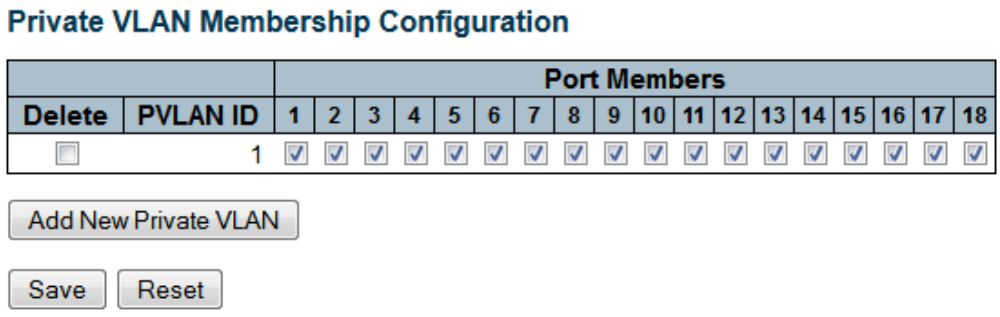

Private VLANs do not work across the stack.

Delete

To delete a private VLAN entry, check this box. The entry will be deleted during the next save.

Private VLAN ID

Indicates the ID of this particular private VLAN.

Port Members

A row of check boxes for each port is displayed for each private VLAN ID. To include a port in a Private VLAN, check the box. To remove or exclude the port from the Private VLAN, make sure the box is unchecked. By default, no ports are members, and all boxes are unchecked.

Adding a New Private VLAN

Click to add a new private VLAN ID. An empty row is added to the table, and the private VLAN can be configured as needed. The allowed range for a private VLAN ID is the same as the switch port number range. Any values outside this range are not accepted, and a warning message appears. Click "OK" to discard the incorrect entry, or click "Cancel" to return to the editing and make a correction.

The Private VLAN is enabled when you click "Save."

The button can be used to undo the addition of new Private VLANs.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.14.2 Port Isolation Configuration

Overview

This page is used for enabling or disabling port isolation on ports in a Private VLAN..

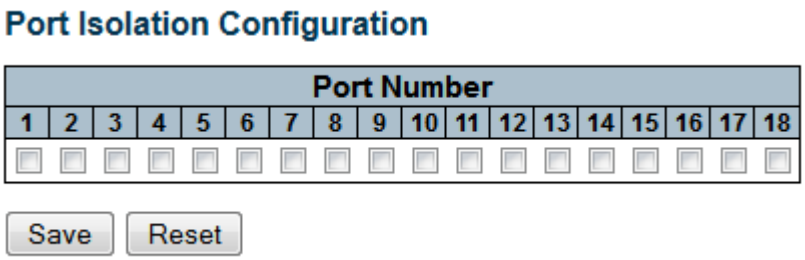

A port member of a VLAN can be isolated to other isolated ports on the same VLAN and Private VLAN.

The port settings relate to the currently selected stack unit, as reflected by the page header.

This feature works across the stack.

Configuration

Port Members

A check box is provided for each port of a private VLAN. When checked, port isolation is enabled on that port. When unchecked, port isolation is disabled on that port.
By default, port isolation is disabled on all ports.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.15 VCL

4.15.1 VCL / MAC-Based VLAN Configuration

The MAC-based VLAN entries can be configured here. This page allows for adding and deleting MAC-based VLAN entries and assigning the entries to different ports. This page shows only static entries.

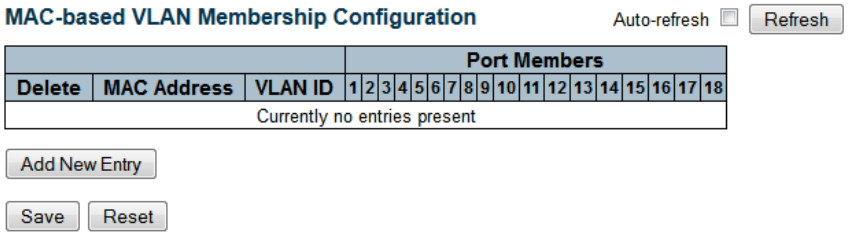

MAC Address

Indicates the MAC address.

VLAN ID

Indicates the VLAN ID.

Port Members

A row of check boxes for each port is displayed for each MAC-based VLAN entry. To include a port in a MAC-based VLAN, check the box. To remove or exclude the port from the MAC-based VLAN, make sure the box is unchecked. By default, no ports are members, and all boxes are unchecked.

Adding a New MAC-based VLAN

Click “Add new Entry.” No broadcast or multicast MAC addresses are allowed. Legal values for a VLAN ID are **1** through **4095.**

The MAC-based VLAN entry is enabled when you click "Save." A MAC-based VLAN without any port members will be deleted when you click "Save."

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Auto-Refresh: Refreshes the displayed the table starting from the “VLAN ID” input fields.

<< : Updates the table starting from the first entry in the VLAN Table; i.e., the entry with the lowest VLAN ID.

>>: Update the table, staring with the entry after the last entry currently displayed.

4.15.2 VCL / Protocol-based VLAN

Protocol to Group Mapping Table

This page allows you to add new protocols to Group Name (unique for each Group) mapping entries and to see and delete already-mapped entries for the switch.

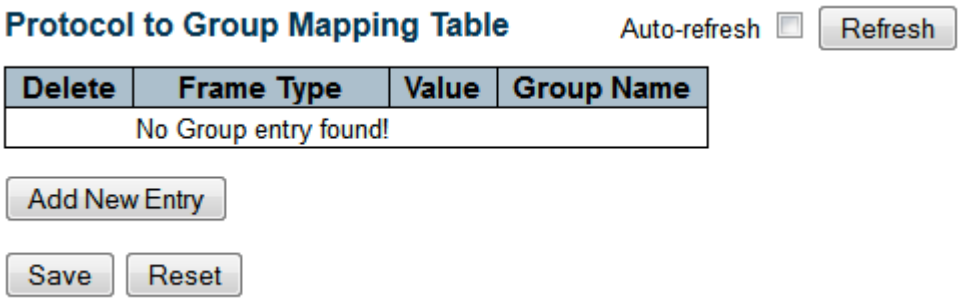

Frame Type

Frame Type can have one of the following values:

1. **Ethernet**
2. **LLC**
3. **SNAP**

Note: On changing the Frame type field, valid values of the following text field will vary depending on the new frame type you select.

Value

Valid values that can be entered in this text field depend on the option selected from the the preceding Frame Type selection menu.
Below are the criteria for three different Frame Types:

For Ethernet: Values in the text field when Ethernet is selected as a Frame Type are called etypes. Valid values for etypes range from 0x0600 to 0xffff.

For LLC: Valid values in this case are composed of two different sub-values.
a. **DSAP**: 1-byte long string (0x00-0xff)
b. **SSAP:** 1-byte long string (0x00-0xff)

For SNAP: Valid values in this case also are composed of two different sub-values.
a **OUI:** OUI (Organizationally Unique Identifier) is value in the format of xx-xx-xx, where each pair (xx) in the string is a hexadecimal value that ranges from 0x00 to 0xff.
b. **PID:** If the OUI is hexadecimal (000000), the protocol ID is the Ethernet type (EtherType) field value for the protocol running on top of SNAP; if the OUI is an OUI for a particular organization, the protocol ID is a value assigned by that organization to the protocol running on top of SNAP.

In other words, if the value in the OUI field is 00-00-00, then the value of PID will be etype (0x0600-0xffff); and if the value of OUI is other than 00-00-00, then the valid value of PID will be any value from 0x0000 to 0xffff.

Group Name

A valid Group Name is a unique 16-character-long string for every entry which consists of a combination of letters (a-z or A-Z) and integers (0-9).

Note: special characters and underscores (_) are not allowed.

Adding a New Group to VLAN mapping entry

Click to add a new entry in the mapping table. An empty row is added to the table; Frame Type, Value and the Group Name can be configured as needed.
The button can be used to undo the addition of a new entry.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

VLC / Protocol-based VLAN / Group Name to VLAN mapping Table

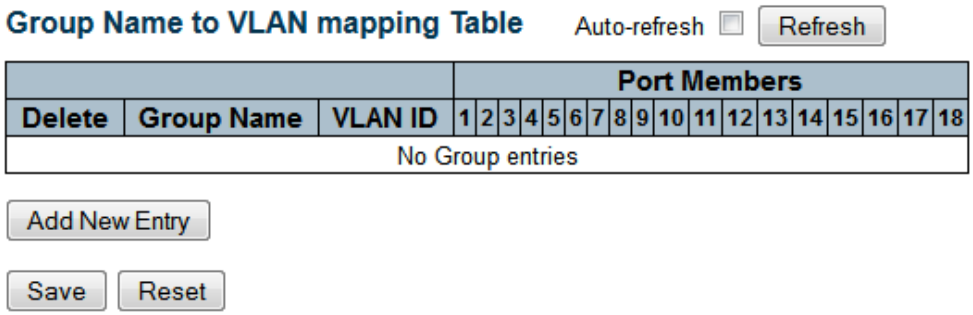

This page allows you to map a already configured Group Name to a VLAN for the switch. The displayed settings:

Group Name

A valid Group Name is a string of at most 16 characters in a combination of letters (a-z or A-Z) and integers (0-9). No special characters are allowed. Whichever Group name you try to map to a VLAN must be present in the Protocol to Group mapping table and must not be pre-used by any other existing mapping entry on this page.

VLAD ID

Indicates the ID to which Group Name will be mapped. A valid VLAN ID ranges from 1-4095.

Port Members

A row of check boxes for each port is displayed for each Group Name to VLAN ID mapping. To include a port in a mapping, check the box. To remove or exclude the port from the mapping, make sure the box is unchecked. By default, no ports are members, and all boxes are unchecked.

Adding a New Group to VLAN mapping entry

Click to add a new entry in mapping table. An empty row is added to the table, the Group Name, VLAN ID and port members can be configured as needed. Legal values for a VLAN ID are **1** through **4095**.

The button can be used to undo the addition of new entry.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.15.3 VCL / IP Subnet-based VLAN

The IP subnet-based VLAN enties can be configured here. This page allows for adding, updating and deleting IP subnet-based VLAN entries and assigning the entries to different ports. This page shows only static entries.

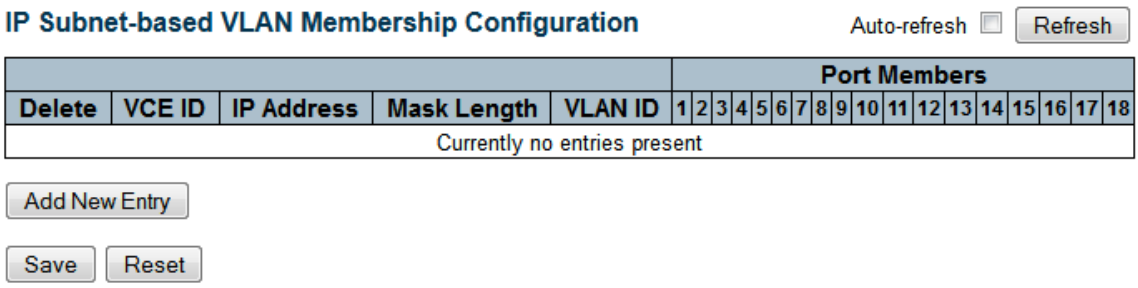

Delete

To delete a IP subnet-based VLAN entry, check this box and press save. The entry will be deleted in the stack.

VCE ID

Indicates the index of the entry. It is user configurable. Its value ranges from 0 to 256. If a VCE ID is 0, the application will auto-generate the VCE ID for that entry. Deletion and lookup of IP subnet-based VLAN are based on the VCE ID.

IP Address

Indicates the IP address.

Mask Length

Indicates the network mask length.

VLAN ID

Indicates the VLAN ID. VLAN ID can be changed for the existing entries.

Port Members

A row of check boxes for each port is displayed for each IP subnet-based VLAN entry. To include a port in an IP subnet-based VLAN, check the box. To remove or exclude the port from the IP subnet-based VLAN, make sure the box is unchecked. By default, no ports are members, and all boxes are unchecked.

Adding a New IP subnet-based VLAN

Click **"Add New Entry"** to add a new IP subnet-based VLAN entry. An empty row is added to the table, and the IP subnet-based VLAN entry can be configured as needed. Any IP address/mask can be configured for the IP subnet-based VLAN entry. Legal values for a VLAN ID are 1 through 4095.

The IP subnet-based VLAN entry is enabled when you click on "Save." The **"Delete"** button can be used to undo the addition of new IP subnet-based VLANs.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Auto-refresh: Check this box to refresh the page automatically. Automatic refresh occurs every 3 seconds.

Refresh: Refreshes the displayed table.

4.16 Voice VLAN Configuration

4.16.1 Voice VLAN / Configuration

The Voice VLAN feature enables voice traffic forwarding on the Voice VLAN so the switch can classify and schedule network traffic. It is recommended that there be two VLANs on a port: one for voice, one for data. Before connecting the IP device to the switch, the IP phone should configure the voice VLAN ID correctly. It should be configured through its own GUI.

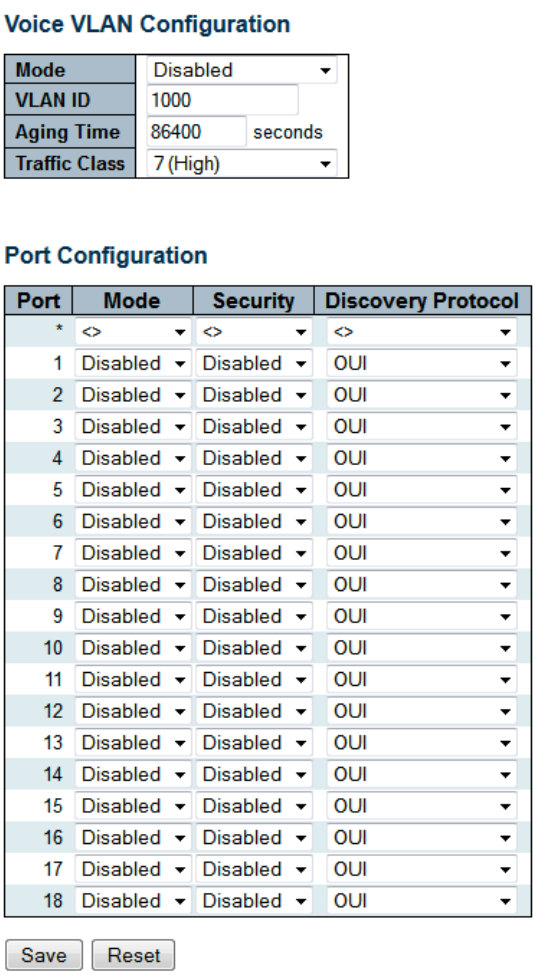

Mode

Indicates the Voice VLAN mode operation. You must disable the MSTP feature before enabling Voice VLAN. It can avoid the conflict of ingress filtering. Possible modes:
Enabled: Enable Voice VLAN mode operation.

Disabled: Disable Voice VLAN mod operation.

VLAN ID

Indicates the Voice VLAN ID. It should be a unique VLAN ID in the system and cannot equal each port PVID. It is a conflict in configuration if the value equals management VID, MVR VID, PVID, etc. The allowed range is **1** to **4095**.

Aging Time

Indicates the Voice VLAN secure learning aging time. The allowed range is 10 to 1000000 seconds. It is used when security mode or auto detect mode is enabled. In other cases, it will be based on hardware aging time. The actual aging time will be situated between the [age time; 2 * age time] interval.

Traffic Class

Indicates the Voice VLAN traffic class. All traffic on the Voice VLAN will apply to this class.

Port Mode

Indicates the Voice VLAN port mode.

Possible modes:

Disabled: from Voice VLAN.
Auto: Enable auto detect mode. It detects whether there is VoIP phone attached to the specific port and configures the Voice VLAN members automatically.
Forced: Force join to Voice VLAN.

Port Security

The Voice VLAN port security mode. When the function is enabled, all non-telephonic MAC addresses in the Voice VLAN will be blocked for 10 seconds. Possible port modes:
Enabled: Enable Voice VLAN security mode operation.

Disabled: Disable Voice VLAN security mode operation.

Port Discovery Protocol

Indicates the Voice VLAN port discovery protocol. It will only work when auto detect mode is enabled. You should enable the LLDP feature before configuring the discovery protocol to "LLDP" or "Both." Changing the discovery protocol to "OUI" or "LLDP" will restart the auto-detect process. Possible discovery protocols:
OUI: Detect telephony device by OUI address.
LLDP: Detect telephony device by LLDP.
Both: Both OUI and LLDP.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.16.2 Voice VLAN / OUI Configuration

Configure the Voice VLAN OUI table on this page. The maximum entry number is **16**. Modifying the OUI table will restart auto-detection of the OUI process.

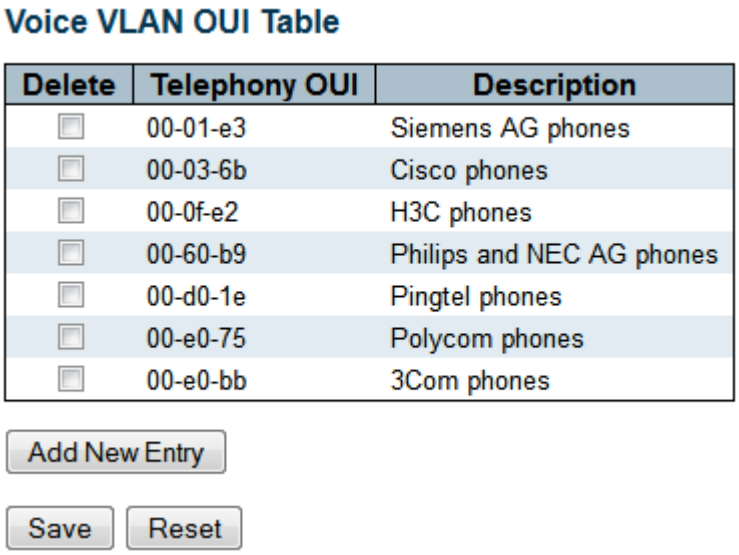

Delete

Check to delete the entry. It will be deleted during the next save.

Telephony OUI

A telephony OUI address is a globally unique identifier assigned to a vendor by IEEE. It must be 6 characters long and the input format is "xx-xx-xx" (x is a hexadecimal digit).

Description

The description of OUI address. Normally, it describes which vendor telephony device it belongs to. The allowed string length is **0** to **32**.

Buttons

Add new entry: Click to add a new access management entry.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Refresh: Refreshes the displayed the table starting from the “VLAND ID” input fields.

<< : Updates the table starting from the first entry in the VLAN Table; i.e., the entry with the lowest VLAN.

4.17 QoS

4.17.1 QoS / Ingress Port Classification

This page allows you to configure the basic QoS Ingress Classification settings for all switch ports.

The settings relate to the currently selected stack unit, as reflected by the page header.

The displayed settings:

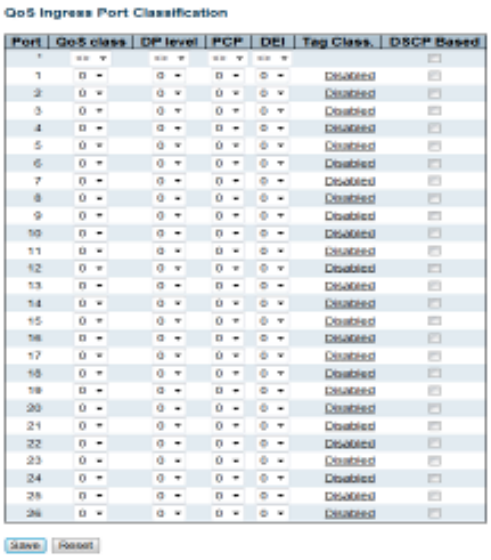

Port

The port number for which the configuration below applies.

QoS class

Controls the default QoS class; i.e., the QoS class for frames not classified in any other way. There is a one-to-one mapping between QoS class, queue and priority. A QoS class of 0 (zero) has the lowest priority.

DP level

Controls the default Drop Precedence Level; i.e., the DP level for frames not classified in any other way.

PCP

Controls the default PCP for untagged frames.

DEI

Controls the default DEI for untagged frames.

Tag Class

Shows the classification mode for tagged frames on this port.

Disabled: Use default QoS class and DP level for tagged frames.

Enabled: Use mapped versions of PCP and DEI for tagged frames.
Click on the mode in order to configure the mode and/or mapping.

DSCP Based

Click to Enable DSCP Based QoS Ingress Port Classification.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.17.2 QoS / Ingress Port Policer Config

This page allows you to configure the Policer settings for all switch ports. The settings relate to the currently selected stack unit, as reflected by the page header.

The displayed settings:

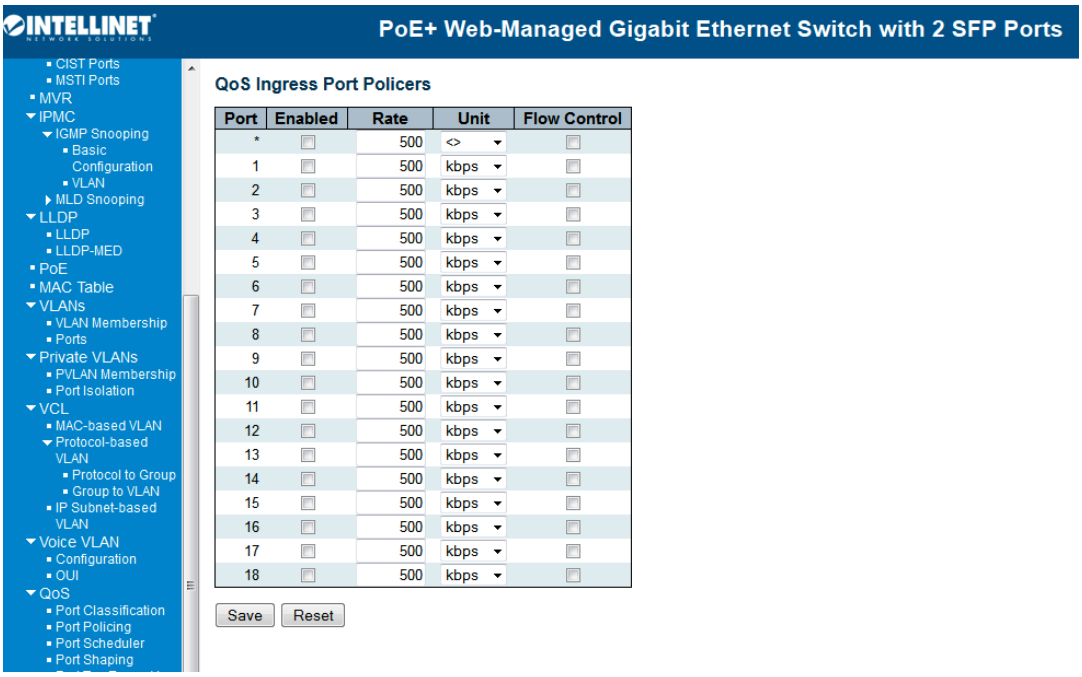

Port

The port number for which the configuration below applies.

Enabled

Controls whether the policer is enabled on this switch port.

Rate

Controls the rate for the policer. The default value is 500. This value is restricted to 100-1000000 when the "Unit" is "kbps" or "fps," and it is restricted to 1-3300 when the "Unit" is "Mbps" or "kfps."

Unit

Controls the unit of measure for the policer rate as kbps, Mbps, fps or kfps . The default value is "kbps."

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.17.3 QoS / Port Scheduler

This page provides an overview of QoS Egress Port Schedulers for all switch ports.

The ports belong to the currently selected stack unit, as reflected by the page header.

The displayed settings:

QoS Egress Port Schedulers

Port	Mode	Weight					
		Q0	Q1	Q2	Q3	Q4	Q5
1	Strict Priority	-	-	-	-	-	-
2	Strict Priority	-	-	-	-	-	-
3	Strict Priority	-	-	-	-	-	-
4	Strict Priority	-	-	-	-	-	-
5	Strict Priority	-	-	-	-	-	-
6	Strict Priority	-	-	-	-	-	-
7	Strict Priority	-	-	-	-	-	-
8	Strict Priority	-	-	-	-	-	-
9	Strict Priority	-	-	-	-	-	-
10	Strict Priority	-	-	-	-	-	-
11	Strict Priority	-	-	-	-	-	-
12	Strict Priority	-	-	-	-	-	-
13	Strict Priority	-	-	-	-	-	-
14	Strict Priority	-	-	-	-	-	-
15	Strict Priority	-	-	-	-	-	-
16	Strict Priority	-	-	-	-	-	-
17	Strict Priority	-	-	-	-	-	-
18	Strict Priority	-	-	-	-	-	-

Port

The logical port for the settings contained in the same row.
Click on the port number in order to configure the schedulers.

Mode

Shows the scheduling mode for this port.

Qn

Shows the weight for this queue and port.

4.17.4 QoS / Egress Port Shapers

This page provides an overview of QoS Egress Port Shapers for all switch ports.

The ports belong to the currently selected stack unit, as reflected by the page header.

The displayed settings:

QoS Egress Port Shapers

Port	Shapers								
	Q0	Q1	Q2	Q3	Q4	Q5	Q6	Q7	Port
1	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
2	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
3	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
4	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
5	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
6	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
7	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
8	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
9	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
10	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
11	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
12	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
13	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
14	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
15	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
16	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
17	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
18	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled

Port

The logical port for the settings contained in the same row.
Click on the port number in order to configure the shapers.

Qn

Shows "disabled" or actual queue shaper rate; e.g., "800 Mbps."

Port

Shows "disabled" or actual port shaper rate; e.g., "800 Mbps."

4.17.5 QoS / Port Tag Remarking

This page provides an overview of QoS Egress Port Tag Remarking for all switch ports.

The ports belong to the currently selected stack unit, as reflected by the page header.

The displayed settings:

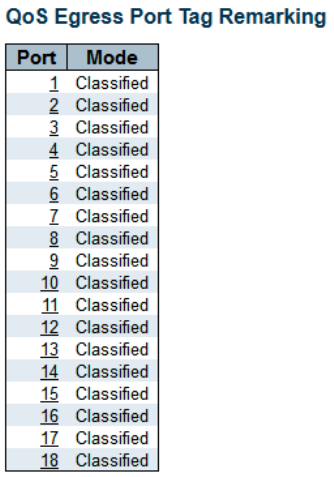

QoS Egress Port Tag Remarking

Port	Mode
1	Classified
2	Classified
3	Classified
4	Classified
5	Classified
6	Classified
7	Classified
8	Classified
9	Classified
10	Classified
11	Classified
12	Classified
13	Classified
14	Classified
15	Classified
16	Classified
17	Classified
18	Classified

Port

The logical port for the settings contained in the same row.
Click on the port number in order to configure tag remarking.

Mode

Shows the tag remarking mode for this port.
Classified: Use classified PCP/DEI values.
Default: Use default PCP/DEI values.
Mapped: Use mapped versions of QoS class and DP level.

QoS / DSCP

4.17.6 QoS / Port DSCP Configuration

This page allows you to configure the basic QoS Port DSCP Configuration settings for all switch ports.

The settings relate to the currently selected stack unit, as reflected by the page header.

The displayed settings:

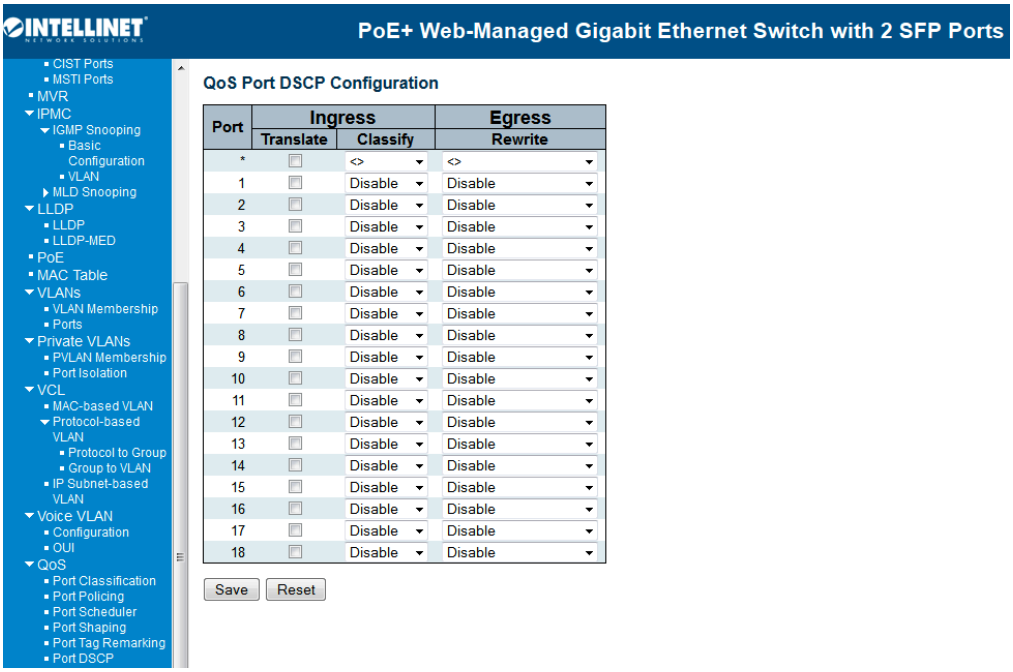

Port

The Port column shows the list of ports for which you can configure DSCP ingress and egress settings.

Ingress

In Ingress settings you can change ingress translation and classification settings for individual ports.
There are two configuration parameters available in Ingress:
1. Translate
2. Classify

1. Translate

To Enable the Ingress Translation, click the checkbox.

2. Classify

Classification for a port has four possible values.

Disabled: No Ingress DSCP Classification.

DSCP=0: Classify if incoming (or translated if enabled) DSCP is 0.

Selected: Classify only selected DSCP for which classification is enabled as specified in DSCP.

Translation window for the specific DSCP.

All: Classify all DSCP.

Egress

Port Egress Rewriting offers four options:

Disabled: No Egress rewrite.

Enable: Rewrite enabled without remapping.

Remap DP Unaware: DSCP from analyzer is remapped and frame is remarked with remapped DSCP value. The remapped DSCP value is always taken from the DSCP Translation -> Egress Remap DP0 table.

Remap DP Aware: DSCP from analyzer is remapped and frame is remarked with remapped DSCP value. Depending on the DP level of the frame, the remapped DSCP value is either taken from the DSCP Translation -> Egress Remap DP0 table or from the DSCP Translation -> Egress Remap DP1 table.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.17.7 QoS / DSCP-based QoS Ingress Classification

This page allows you to configure the basic QoS DSCP based QoS Ingress Classification settings for all switches.

The displayed settings:

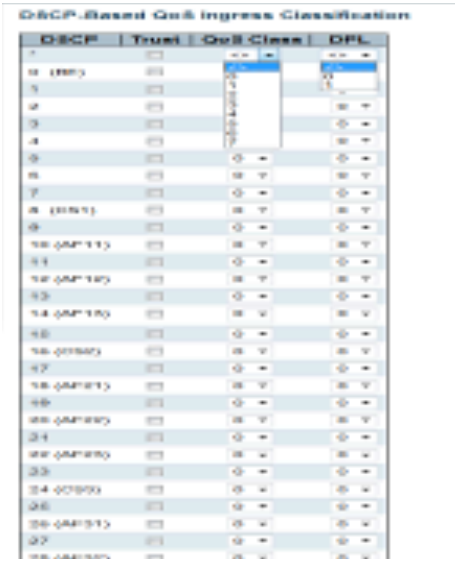

DSCP

Maximum number of supported DSCP values is 64.

Trust

Controls whether a specific DSCP value is trusted. Only frames with trusted DSCP values are mapped to a specific QOs class and Drop Precedence Level. Frames with untrusted DSCP values are treated as non-IP frames.

QoS Class

The QoS class value can be from 0 to 7.

DPL

Drop Precedence Level (0-1).

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.17.8 QoS / DSCP Translation

This page allows you to configure the basic QoS DSCP Translation settings for all switches. DSCP translation can be done in Ingress or Egress.

The displayed settings:

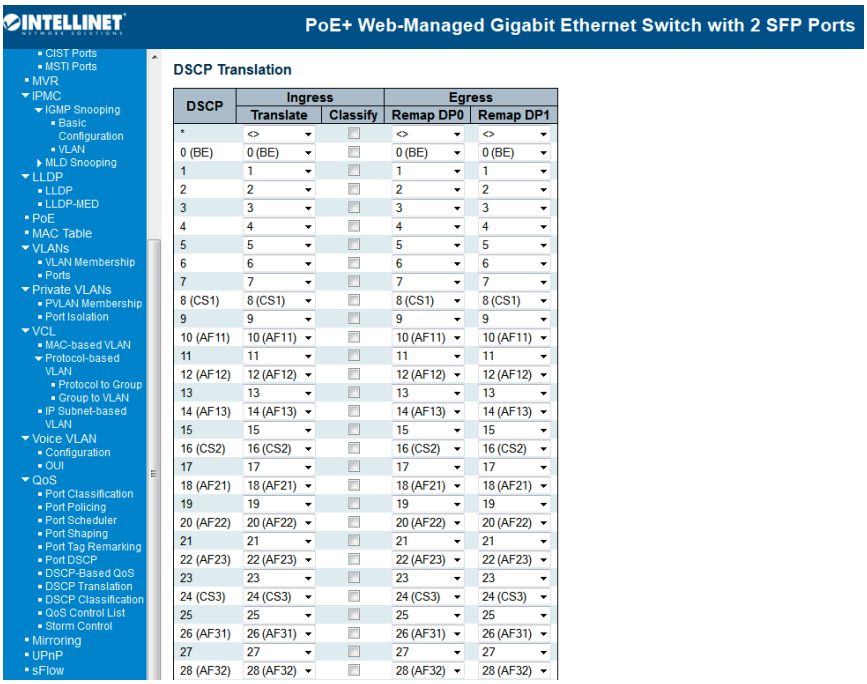

DSCP

Maximum number of supported DSCP values is 64, and valid DSCP values range from 0 to 63.

Ingress

Ingress side DSCP can be first translated to new a DSCP before using the DSCP for QoS class and DPL map.

There are two configuration parameters for DSCP Translation:

1. Translate

2. Classify

1. Translate

DSCP at Ingress side can be translated to DSCP values in the range of 0 to 63..

2. Classify

Click to enable Classification at Ingress side.

Egress

Configurable parameters for Egress side:

1. Remap DP0 Controls the remapping for frames with DP level 0.

2. Remap DP1 Controls the remapping for frames with DP level 1.

1. Remap DP0

Select the DSCP value from the menu to which you want to remap. DSCP value ranges form 0 to 63.

2. Remap DP1

Select the DSCP value from the menu to which you want to remap. DSCP value ranges form 0 to 63.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.17.9 QoS / DSCP Classification

This page allows you to configure the mapping of QoS class and Drop Precedence Level to DSCP values.

The settings relate to the currently selected stack unit, as reflected by the page header.

The displayed settings:

DSCP Classification

QoS Class	DPL	DSCP
*	*	<>
0	0	0 (BE)
0	1	0 (BE)
1	0	0 (BE)
1	1	0 (BE)
2	0	0 (BE)
2	1	0 (BE)
3	0	0 (BE)
3	1	0 (BE)
4	0	0 (BE)
4	1	0 (BE)
5	0	0 (BE)
5	1	0 (BE)
6	0	0 (BE)
6	1	0 (BE)
7	0	0 (BE)
7	1	0 (BE)

Save Reset

QoS Class

Actual QoS class.

DPL

Actual Drop Precedence Level.

DSCP

Select the classified DSCP value (0-63).

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.17.10 QoS / Control List Configuration

QoS Control List Configuration

This page shows the QoS Control List(QCL), which is made up of the QCEs. Each row describes a QCE that is defined. The maximum number of QCEs is **256** on each switch.
Click on the lowest plus sign to add a new QCE to the list.

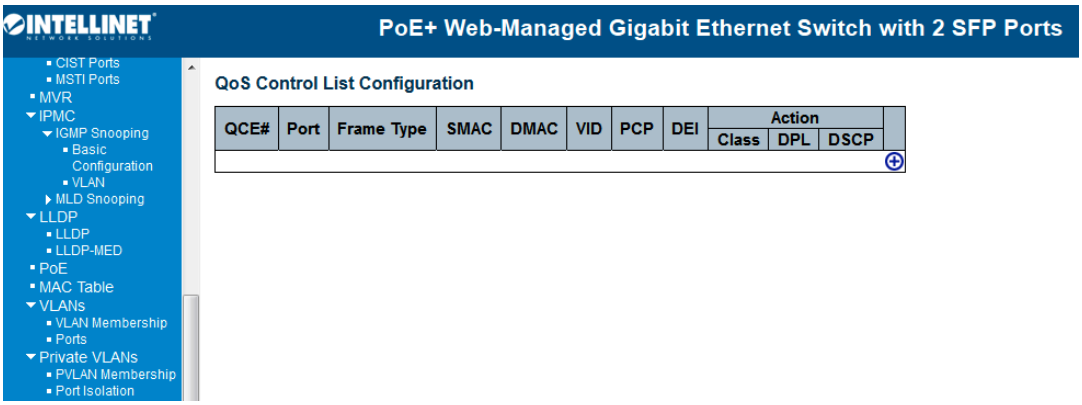

QCE#

Indicates the index of QCE.

Port

Indicates the list of ports configured with the QCE.

Frame Type

Indicates the type of frame to look for incoming frames. Possible frame types:
Any: The QCE will match all frame types.
Ethernet: Only Ethernet frames (with Ether Type 0x600-0xFFFF) are allowed.

LLC: Only (LLC) frames are allowed.
SNAP: Only (SNAP) frames are allowed.
IPv4: The QCE will match only IPV4 frames.
IPv6: The QCE will match only IPV6 frames.

SMAC

Displays the OUI field of a Source MAC address; i.e., first three octet (byte) of a MAC address.

DMAC

Specify the type of Destination MAC addresses for incoming frames. Possible values:
Any: All types of Destination MAC addresses are allowed.
Unicast: Only Unicast MAC addresses are allowed.
Multicast: Only Multicast MAC addresses are allowed.
Broadcast: Only Broadcast MAC addresses are allowed.
The default value is “Any.”

VID

Indicates (VLAN ID), either a specific VID or range of VIDs. VID can be in the range 1-4095 or “Any.”

PCP

Priority Code Point: Valid values for PCP are specific (0, 1, 2, 3, 4, 5, 6, 7) or in a range (0-1, 2-3, 4-5, 6-7, 0-3, 4-7) or “Any.”

DEI

Drop Eligible Indicator: Valid values of DEI can be 0, 1 or “Any.”

Conflict

Displays QCE status. It may happen that resources required to add a QCE may not available. In that case, it shows conflict status as “Yes”; otherwise, it is always “No.” Note that conflict can be resolved by releasing the resource required by the QCE and clicking “Refresh.”

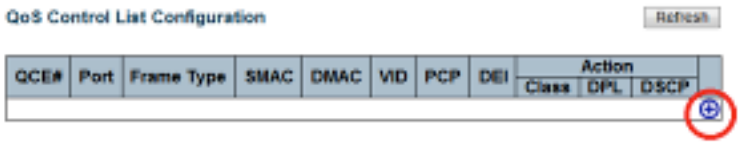

Action

Indicates the classification action taken on ingress frame if parameters configured are matched with the frame's content.
There are three action fields: Class, DPL and DSCP.
Class: Classified QoS class..
DPL: Classified Drop Precedence Level.
DSCP: Classified DSCP value.

Modification Buttons

You can modify each QCE (QoS Control Entry) in the table using the following buttons:

: Inserts a new QCE before the current row.

: Edits the QCE.

: Moves the QCE up the list.

: Moves the QCE down the list.

: Deletes the QCE.

: The lowest plus sign adds a new entry at the bottom of the QCE listings.

Buttons

Refresh : Click to refresh the page. This will help to check the latest conflict status after releasing the resources.

4.17.11 QoS / Storm Control Configuration

Storm control for the switch is configured on this page.

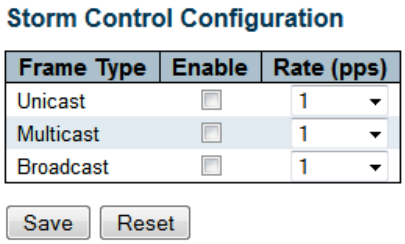

There is a unicast storm rate control, a multicast storm rate control and a broadcast storm rate control. These only affect flooded frames; i.e., frames with a (VLAN ID, DMAC) pair not present on the MAC Address table.
The configuration indicates the permitted packet rate for unicast, multicast or broadcast traffic across the switch.

Note: Frames, which are sent to the CPU of the switch are always limited to approximately 4 kpps. For example, broadcasts in the management VLAN are limited to this rate. The management VLAN is configured on the IP setup page.

Frame Type

The settings in a particular row apply to the frame type listed here: Unicast, Multicast or Broadcast.

Enable

Enable or disable the storm control status for the given frame type.

Rate

The rate unit is packets per second (pps). Valid values:

1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1K, 2K, 4K, 8K, 16K, 32K, 64K, 128K, 256K, 512K, 1024K, 2048K, 4096K, 8192K, 16384K or **32768K.**

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.18 Mirroring Configuration

Configure port Mirroring on this page.

To debug network problems, selected traffic can be copied, or mirrored, on a **mirror port**, where a frame analyzer can be attached to analyze the frame flow.

The traffic to be copied on the **mirror port** is selected as follows:

All frames received on a given port (also known as ingress or source mirroring).

All frames transmitted on a given port (also known as egress or destination mirroring).

Port to mirror on

Port to mirror is also known as the **mirror port**. Frames from ports that have either source (rx) or destination (tx) mirroring enabled are mirrored on this port. **Disabled** disables mirroring.

Mirror Port Configuration

The following table is used for Rx and Tx enabling.

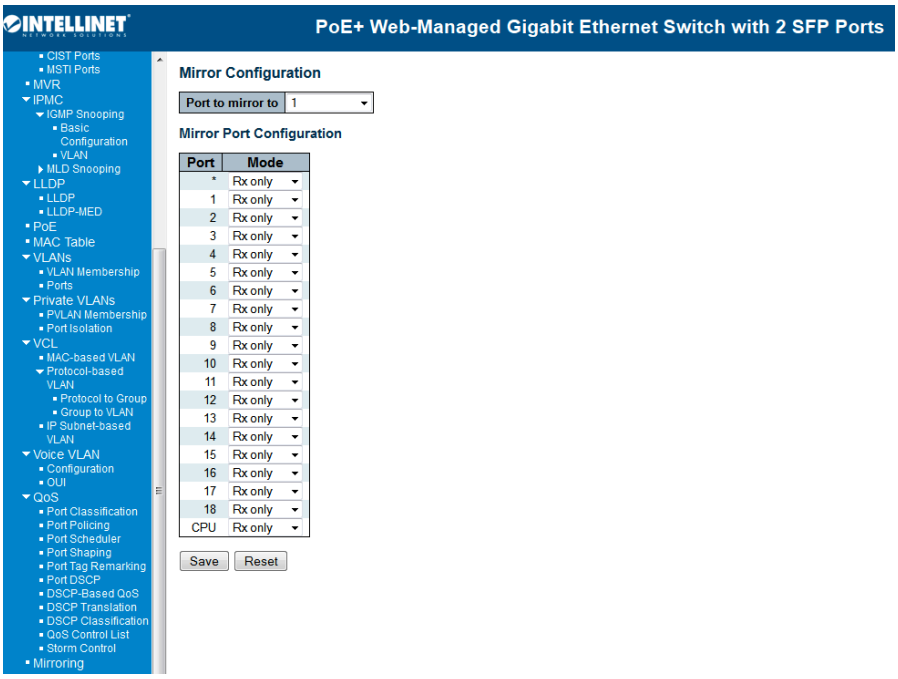

Port

The logical port for the settings contained in the same row.

Mode

Select mirror mode.
Rx only Frames received on this port are mirrored on the **mirror port**. Frames transmitted are not mirrored.
Tx only Frames transmitted on this port are mirrored on the **mirror port**. Frames received are not mirrored.

Disabled: Neither frames transmitted nor frames received are mirrored.
Enabled Frames received and frames transmitted are mirrored on the **mirror port**.

Note: For a given port, a frame is only transmitted once. It is therefore not possible to mirror Tx frames on the **mirror port**. Because of this, the **mode** for the selected **mirror port** is limited to **Disabled** or **Rx only**.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.19 UPnP Configuration

Configure UPnP on this page.

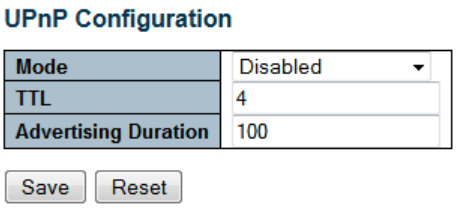

Mode

Indicates the UPnP operation mode. Possible modes are:
Enabled: Enable UPnP mode operation.

Disabled: Disable UPnP mode operation.
When the mode is enabled, two ACEs are added automatically to trap UPNP related packets to CPU. The ACEs are automatically removed when the mode is disabled.

TTL

The TTL value is used by UPnP to send SSDP advertisement messages. Valid values are in the range of 1 to 255.

Advertising Duration

The duration, carried in SSDP packets, is used to inform a control point or control points how often it or they should receive an SSDP advertisement message from this switch. If a control point does not receive any message within the duration, it will think that the switch no longer exists. Due to the unreliable nature of UDP, in the standard it is recommended that such refreshing of advertisements to be done at less than one-half of the advertising duration. In the implementation, the switch sends SSDP messages periodically at the interval one-half of the advertising duration minus 30 seconds. Valid values are in the range 100 to 86400.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

4.20 sFlow Configuration

Sampled Flow (sFlow) is a traffic monitoring technology mainly used to collect and analyze traffic statistics. The switch supports sFlow feature. The sFlow software agent collects traffic statistics and packet information from the sFlow-enabled interfaces on the switch, encapsulates them into sFlow packets. The sFlow agent then sends the packet to a specified sFlow collector, the IP Address you assigned in the switch UI. The sFlow collector analyzes the sFlow packets and displays the result.

sFlow has the following two sampling mechanisms:

* Flow sampling: Packet-based sampling, used to obtain packet content information.

* Counter sampling: Time-based sampling, used to obtain port traffic statistics.

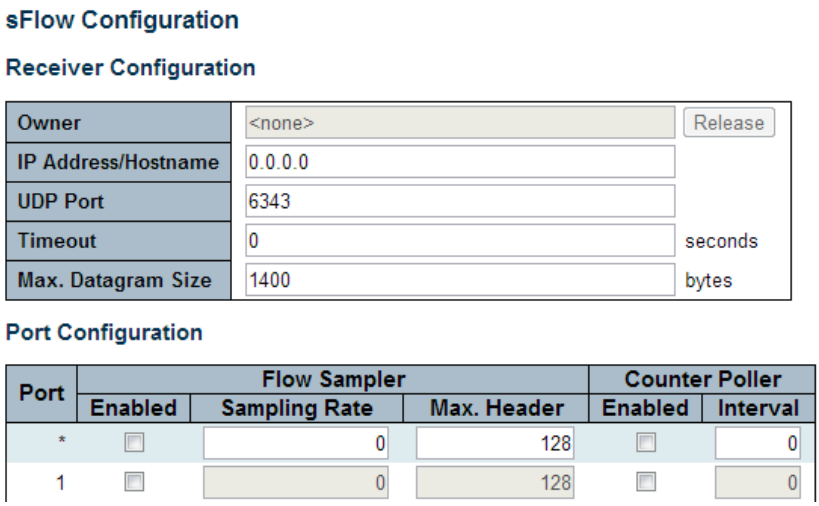

Type the IP address of sFlow collector in the Receiver Configuration. The sFlow agent will send the collected information to it.

This next page displays the configured **sFlow Samplers** on the switch.

sFlow Ports

List of the port numbers on which sFlow is configured.

sFlow Instance

Configured sFlow instance for the port number.

Flow Sampling

Packet flow sampling refers to arbitrarily choosing some packets out of a specified number, reading the first "Max Hdr Size" bytes and exporting the sampled datagram for analysis.
The attributes associated with the flow sampling are sampler type, sampling rate and maximum header size.

Sampler Type

The configured sampler type on the port can be None, RX, TX or ALL.

The default value is "none."

Sampling Rate

Configured sampling rate on the ports.

Max Hdr Size

Configured size of the header of the sampled frame.

Counter Sampling

Counter sampling performs periodic, time-based samplings or polling of counters associated with an interface enabled for sFlow.
The attribute associated with counter sampling is polling interval.

Polling Interval

Configured polling interval for the counter sampling.

5. Feature Configuration - CLI

The Command Line Interface (CLI) is the user interface to the switch's embedded software system. You can view the system information, show the status, configure the switch and receive a response back from the system by keying in a command.

After you log in to the switch through the console CLI, you can see the ">" mark. You can type the command after it. Some useful commands:

Type "<group>" to enter command group; e.g., "port" to the port configuration.

Type "<group> ?" to get list of group commands; e.g., "port ?." You can follow the instruction step by step to finish the command.

Type "<command> ?" to get help on a command, e.g., "port mode ?."

Type "up" to move up one level or "/" to go to root level

Type "logout" in root level to leave the command line interface.

Click "Enter" key after finish the command.

Click "Up" key to repeat the previous commands.

Commands may be abbreviated, e.g., "por co' instead of "port configuration." For quick configuration, the abbreviated type is helpful.

Example: Configure the System Contact to Orwell

You can go to system group or type the full name in root level. Both of the methods can meet your needs.

In system group mode:

System>contact Orwell

In root level:

>sys contact Orwell

Note: This chapter just lists the relevant command lines of the feature settings for your reference. You can see the detailed explanations of the commands and features in Chapter 4.

5.1 System Configuration

Feature	**Command Line**
System Information	
System Group	Enter the System Configuration Group to do additional configuration. >system Type "up" to move up one level or "/" to go to root level System>
System Contact	**Syntax:** System Name [<name>] **Parameters:**

	<name>: System name string. (1-255) **Example:** Contact Name = Orwell System>contact Orwell
System Name	**Syntax:** System Name [<name>] **Parameters:** <name>: System name string. (1-255) **Example:** Contact Name = poeswitch System>name poeswitch poeswitch:/> *(After given system name, the prompt character will be changed automatically.)*
System Location	**Syntax:** System Location [<location>] **Parameters:** <location>: System location string. (1-255) **Example:** Location Name poeswitch:/System>loca fll_01
Time Zone Offset	**Syntax:** System Timezone [<offset>] **Parameters:** <offset>: Time zone offset in minutes (-720 to 720) relative to UTC **Example:** Time Zone = 100 poeswitch:/System>time 100
IP Configuration	
IP Group	Enter the IP Configuration Group poeswitch:/>ip Type “up” to move up one level or “/” to go to root level poeswitch:/IP>
DHCP Client	**Syntax:** IP DHCP [enable|disable] poeswitch:/IP>dhcp en
IP Setting (Address, Mask, Gateway, Managed VID)	**Syntax:** IP Setup [<ip_addr>] [<ip_mask>] [<ip_router>] [<vid>] **Example:** IP=192.168.2.2, Mask=255.255.255.0, Gateway: 192.168.2.254, VID=1 poeswitch:/IP>setup 192.168.2.2 255.255.255.0 192.168.2.254 1
NTP	Enable NTP Mode by the below command: poeswitch:/IP>ntp mode en Type the NTP Server address settings by the below command:

	Syntax: IP NTP Server Add <server_index> <ip_addr_string> IP NTP Server Ipv6 Add <server_index> <server_ipv6> IP NTP Server Delete <server_index> **Example:** poeswitch:/IP>ntp ser add 1 192.168.100.1 poeswitch:/IP>ntp ser add 2 168.95.1.1 Check the NTP Server settings by below command: poeswitch:/IP>ntp conf IP NTP Configuration: ========== NTP Mode : Enabled Idx Server IP host address (a.b.c.d) or a host name string --- ---------- 1 192.168.100.1 2 168.95.1.1 3 4 5
DNS Server	**Syntax:** IP DNS [<ip_addr>] **Parameters:** <ip_addr>: IP address (a.b.c.d), default: Show IP address **Example:** poeswitch:/IP>dns 168.95.1.1
DNS Proxy	**Syntax:** IP DNS_Proxy [enable|disable] poeswitch:/IP>dns_proxy en
IPv6 Configuration	
IPv6 Commands	**Syntax:** IP IPv6 AUTOCONFIG [enable|disable] IP IPv6 Setup [<ipv6_addr>] [<ipv6_prefix>] [<ipv6_router>] IP IPv6 State <ipv6_addr> [enable|disable] IP IPv6 Ping6 <ipv6_addr> [(Length <ping_length>)] [(Count <ping_count>)] [(Interval <ping_interval>)]
Auto Configuration	**Syntax:** IP IPv6 AUTOCONFIG [enable|disable] **Example:** poeswitch:/IP>ipv6 auto en
IPv6 Address Setting (Address, Prefix,	**Syntax:** IP IPv6 Setup [<ipv6_addr>] [<ipv6_prefix>] [<ipv6_router>]

Router)	**Example:** poeswitch:/IP>ipv6 setup 2001:DB8::250:8bff:fee8:f800 48 2001:DB8::250:8bff:fee8:f8ff
IPv6 Ping Test	**Syntax:** IP IPv6 Ping6 <ipv6_addr> [(Length <ping_length>)] [(Count <ping_count>)] [(Interval <ping_interval>)] **Example:** poeswitch:/IP>ipv6 ping6 2001:DB8::250:8bff:fee8:f800
NTP	
NTP Mode	Enable NTP Mode by below command: poeswitch:/IP>ntp mode en
NTP Server Address Setting	**Syntax:** Type the NTP Server address settings by below command: IP NTP Server Add <server_index> <ip_addr_string> IP NTP Server Ipv6 Add <server_index> <server_ipv6> IP NTP Server Delete <server_index> **Example:** poeswitch:/IP>ntp ser add 1 192.168.100.1 poeswitch:/IP>ntp ser add 2 168.95.1.1
NTP Setting Status	Check the NTP Server settings by below command: poeswitch:/IP>ntp conf IP NTP Configuration: ========== NTP Mode : Enabled Idx Server IP host address (a.b.c.d) or a host name string --- ---------- 1 192.168.100.1 2 168.95.1.1 3 4 5
System Log	
Server Mode	**Syntax:** System Log Server Mode [enable|disable] **Example:** poeswitch:/System>log server mode en
Server Address	**Syntax:** System Log Server Address [<ip_addr_string>] **Example:** poeswitch:/System>log server add 192.168.2.100
Syslog Level	**Syntax:** System Log Level [info|warning|error]

	Information: poeswitch:/System>log level inf **Warning:** poeswitch:/System>log level war **Error:** poeswitch:/System>log level err
Clear Syslog	**Syntax:** System Log Clear [all|info|warning|error] poeswitch:/System>log clear all
System Log Configuration	poeswitch:/System>log conf System Log Configuration: ========== System Log Server Mode : Enabled System Log Server Address : 192.168.2.100 System Log Level : Error

5.2 Power Reduction

Feature	Command Line
LED Power Reduction	
LED Intensity Times	**Syntax:** led_power timers [<hour>] [<intensity>] **Parameters:** <hour> : The hour (0-24) at which to change LEDs intensity <intensity>: The LED intensity in % (0-100) **Example: (Time=2:00, Intensity: 30%)** led_power>timer 2 30
Maintenance	**Syntax**: led_power maintenance [<maintenance_time>] [on_at_errors|leave_at_errors] **Parameters**: <maintenance_time> : Time in seconds (0-65535) that the LEDs shall be turned on, when any port changes link state on_at_errors|leave_at_errors: on_at_error if LEDs shall be turned on if any errors has been detected. leave_at_errors if no LED change shall happen when errors have been detected **Example**: led_power>main 20 led_power>main 20 on (20 sec., on_ad_errors enabled)
EEE Configuration	

EEE Port Configuration	**Syntax**: EEE Mode [<port_list>] [enable|disable] **Parameters**: <port_list>: Port list or 'all', default: All ports enable : Enable EEE disable: Disable EEE **Example**: Enable Port 1-5 EEE>mode 1-5 en
Urgent Queue of Port	**Syntax**: EEE Urgent_queues [<port_list>] [<queue_list>] **Parameters**: <port_list> : Port list or “all”; default: All ports <queue_list>: List of queues to configure as urgent queues (1-8 or none) **Example**: Enable Urgent_Queue on Port 1-5 EEE>urge 1-5 2

5.3 Port Configuration

Feature	**Command Line**
Port Configuration	
Port Group	poeswitch:/>port Type “up” to move up one level or “/” to go to root level poeswitch:/Port>
Link State	**Syntax:** Port State [<port_list>] [enable|disable] **Example:** Enable/Disable Port 1 State. After port 1 is disabled, the port can't access the switch. Port>state 1 en Port>state 1 dis
Link Speed and Duplex	**Syntax:** Port Mode [<port_list>] [auto|10hdx|10fdx|100hdx|100fdx|1000fdx|sfp_auto_ams|1000x_ams|100fx_ams|1000x|100fx] **Example:** Port>mode 2 1000fdx (Configure port 2 to 1000 Full Duplex) Port>mode 1-4 1000fdx (Configure port 1-4 to 1000 Full Duplex)
Flow Control	**Syntax:** Port Flow Control [<port_list>] [enable|disable] **Example:** Port>flow cont 1 en (Enable Flow Control on Port 1) Port>flow cont 1 dis (Disable Flow Control on Port 2)
Maximum Frame	**Syntax:**

Size	Port MaxFrame [<port_list>] [<max_frame>] **Example:** Set port 1-24's maximum frame size to 9K jumbo frame Port>maxf 1-24 9600
Port Status	
Port Status	Port>conf 1-2 Port Configuration: ========== Port State Mode Flow Control MaxFrame Power Excessive Link ---- -------- ---------- ---------- -------- -------- --------- ---- 1 Enabled Auto Disabled 9600 Disabled Discard Down 2 Enabled Auto Disabled 9600 Disabled Discard 1Gfdx .....
Port Mode	Port>mode 2 Port Mode Link ---- ---------- ---- 2 Auto 1Gfdx
Port Status - All Information	poeswitch:/Port>config Port Configuration: ========== Port State Mode Flow Control MaxFrame Power Excessive Link ---- -------- ---------- ---------- -------- -------- --------- ---- 1 Enabled Auto Disabled 9600 Disabled Discard Down 2 Enabled Auto Disabled 9600 Disabled Discard 1Gfdx 3 Enabled Auto Disabled 9600 Disabled Discard Down .....
Status of Link UP ports	poeswitch:/Port>conf all up Port Configuration: ========== Port State Mode Flow Control MaxFrame Power Excessive Link ---- -------- ---------- ---------- -------- -------- --------- ---- 2 Enabled Auto Disabled 9600 Disabled Discard 1Gfdx
Port Statistic	poeswitch:/Port>statistic 1 Port 1 Statistics: Rx Packets: 0 Tx Packets: 0 Rx Octets: 0 Tx Octets: 0 Rx Unicast: 0 Tx Unicast: 0 .....

5.4 Security Configuration

Feature	**Command Line**

Security-Switch Configuration	
Security -Switch Group	>securi swi Type “up” to move up one level or “/” to go to root level Security/Switch>? Command Groups: ---------- Security Switch Users : User management Security Switch Privilege: Privilege level Security Switch Auth : Authentication Security Switch SSH : Secure Shell Security Switch HTTPS : Hypertext Transfer Protocol over Secure Socket Layer Security Switch Access : Access management Security Switch SNMP : Simple Network Management Protocol Security Switch RMON : Remote Network Monitoring
User Configuration	Security/Switch>user ? Available Commands: Security Switch Users Configuration Security Switch Users Add <user_name> <password> <privilege_level> Security Switch Users Delete <user_name>
Add New User	**Syntax:** Security Switch Users Add <user_name> <password> <privilege_level> **Example:** Add New User Name, Password with highest privilege, Name: Orwell, Password: password, Privilege: 15 Security/Switch>users add Orwell password 15
Delete the User	**Syntax:** Security Switch Users Delete <user_name> **Example:** Delete the User, Orwell from User Name database Security/Switch>users del Orwell
User Name Database	Security/Switch>users conf Users Configuration: ========== User Name Privilege Level ---------- ---------- admin 15 Orwell 15
Privilege Level	**Syntax:** Security Switch Privilege Level Group <group_name> [<cro>] [<crw>] [<sro>] [<srw>] (cro=Configuration Read-Only, crw=Configuration/Excute Read/Write, sro=Status/Statistics Read-Only, srw=Status/Statistics Read/Write)

	Example: Set Privilege level of VLAN Group Security/Switch/Privilege>level group VLANs 10 10 10 10 (cro=10, crw=10, sro=10, srw=10)
Privilege Level Configuration Table	Security/Switch>pri level conf Privilege Level Configuration: ========== Privilege Current Level: 15 Group Name Privilege Level CRO CRW SRO SRW ---------- --- --- --- --- Aggregation 5 10 5 10 Debug 15 15 15 15 Diagnostics 5 10 5 10
Authentication Method	**Syntax:** Security Switch Auth Method [console|telnet|ssh|web] [none|local|radius|tacacs+] [enable|disable] **Example:** Configure Telnet Authentication method to Radius Enable Security/Switch>auth method telnet radius en
Authentication Configuration	Security/Switch>auth conf Auth Configuration: ========== Client Authentication Method Local Authentication Fallback ------- ---------- ---------- console local Disabled telnet local Disabled ssh local Disabled web local Disabled
SSH	**Syntax:** Security Switch SSH Mode [enable|disable] **Example:** Security/Switch>ssh mode en Security/Switch>ssh mode dis
HTTPS	**Syntax:** Security Switch HTTPS Mode [enable|disable] Security/Switch>https mode en Security/Switch>https mode dis Security Switch HTTPS Redirect [enable|disable] Security/Switch>https mode en (Must enabled HTTPS) Security/Switch>https redi en **Result:** Security/Switch>https conf HTTPS Configuration:

	========== HTTPS Mode: Enabled HTTPS Redirect Mod : Enabled
Access Management	**Syntax:** Security Switch Access Add <access_id> <start_ip_addr> <end_ip_addr> [web] [snmp] [telnet] **Example:** Limit the IP range from the 192.168.2.1 to 192.168.2.10 can access the web UI. Security/Switch>access add 1 192.168.2.1 192.168.2.10 web
SNMP System Configuration (Mode, Version, Read /Write Community)	**Syntax:** Security Switch SNMP Mode [enable|disable] Security Switch SNMP Version [1|2c|3] Security Switch SNMP Read Community [<community>] Security Switch SNMP Write Community [<community>] **Example:** Security/Switch>snmp mode en Security/Switch>snmp ver 2c Security/Switch/SNMP>read com abc Security/Switch/SNMP>write com orwell **Result:** SNMP Configuration: ========== SNMP Mode : Enabled SNMP Version : 2c Read Community : abc Write Community : orwell
SNMP Community	**Syntax:** Security Switch SNMP Community Add <community> [<ip_addr>] [<ip_mask>] Security Switch SNMP Community Delete <index> Security Switch SNMP Community Lookup [<index>] **Example:** Security/Switch>snmp commu add abc Security/Switch>snmp commu add test 192.168.2.100 255.255.255.0
SNMP Trap Server Setting	Enter the SNMP Trap Configuration Group Security/Switch/SNMP>trap Type “up” to move up one level or “/” to go to root level Security/Switch/SNMP/Trap> **Syntax:** Security Switch SNMP Trap Mode [enable|disable] Security Switch SNMP Trap Version [1|2c|3]

	Security Switch SNMP Trap Community [<community>] Security Switch SNMP Trap Destination [<ip_addr_string>] Security Switch SNMP Trap IPv6 Destination [<ipv6_addr>] **Example:** Security/Switch/SNMP/Trap>mode ena Security/Switch/SNMP/Trap>version 2c Security/Switch/SNMP/Trap>community public Security/Switch/SNMP/Trap>destination 192.168.2.100 **Result:** Trap Mode : Enabled Trap Version : 2c Trap Community : public Trap Destination : 192.168.2.100 Trap IPv6 Destination : ::
SNMP Trap Event Setting	**Syntax:** Security Switch SNMP Trap Authentication Failure [enable|disable] Security Switch SNMP Trap Link-up [enable|disable] Security Switch SNMP Trap Inform Mode [enable|disable] Security Switch SNMP Trap Inform Timeout [<timeout>] Security Switch SNMP Trap Inform Retry Times [<retries>] **Example:** Security/Switch/SNMP>trap auth fai en Security/Switch/SNMP>trap link-up en Security/Switch/SNMP>trap info mode en Security/Switch/SNMP>trap info time 5 Security/Switch/SNMP>trap info ret times 5 **Result:** Trap Authentication Failure : Enabled Trap Link-up and Link-down : Enabled Trap Inform Mode : Enabled Trap Inform Timeout (seconds) : 5 Trap Inform Retry Times : 5
SNMPv3 User	**Syntax:** Security Switch SNMP User Add <engineid> <user_name> [MD5|SHA] [<auth_password>] [DES] [<priv_password>] **Example:** Security/Switch/SNMP>user add 800007e5017f000001 orwell Security/Switch/SNMP>user add 800007e5017f000001 andy md5 andy123 **Result:** SNMPv3 Users Table: Idx Engine ID User Name Level Auth Priv --- --------- ---------- ---------- ---- ---- 1 Local default_user NoAuth, NoPriv None None 2 Local orwell NoAuth, NoPriv None None 3 Local andy Auth, NoPriv MD5 None Number of entries: 3

RMON	In Security/Switch Group, the system supports 4 types of RMON groups. Follow the RMON Syntax to add the entries. **Syntax:** Security/Switch>rmon ? **Statistics:** Security Switch RMON Statistics Add <stats_id> <data_source> Security Switch RMON Statistics Delete <stats_id> Security Switch RMON Statistics Lookup [<stats_id>] **Histroy:** Security Switch RMON History Add <history_id> <data_source> [<interval>] [<buckets>] Security Switch RMON History Delete <history_id> Security Switch RMON History Lookup [<history_id>] **Alarm:** Security Switch RMON Alarm Add <alarm_id> <interval> <alarm_vairable> [absolute|delta] <rising_threshold> <rising_event_index> <falling_threshold> <falling_event_index> [rising|falling|both] Security Switch RMON Alarm Delete <alarm_id> Security Switch RMON Alarm Lookup [<alarm_id>] **Event:** Security Switch RMON Event Add <event_id> [none|log|trap|log_trap] [<community>] [<description>] Security Switch RMON Event Delete <event_id> Security Switch RMON Event Lookup [<event_id>]
Security-Network Configuration	
Limit Control	
Limit Control - System Configuration	**Syntax:** Security Network Limit Configuration [<port_list>] Security Network Limit Mode [enable|disable] Security Network Limit Aging [enable|disable] Security Network Limit Agetime [<age_time>] **Example:** Security/Network>limit mode enable Security/Network>limit agin enable Security/Network>limit agetim 1000 **Result:** Port Security Limit Control Configuration: ========== Mode : Enabled Aging : Disabled Age Period: 3600
Limit Control - Port Configuration	**Syntax:** Security Network Limit Port [<port_list>] [enable|disable] Security Network Limit Limit [<port_list>] [<limit>] Security Network Limit Action [<port_list>] [none|trap|shut|trap_shut]

	Security Network Limit Reopen [<port_list>] **Example:** Security/Network>limit port 1 enabl Security/Network>limit limit 1 5 Security/Network>limit action 1 trap
Network Access Server Configuration (also known as IEEE 802.1X)	
NAS System Configuration	**Syntax:** **Mode:** Security Network NAS Mode [enable|disable] Security Network NAS Reauthentication [enable|disable] **Time Settings** Security Network NAS ReauthPeriod [<reauth_period>] Security Network NAS EapolTimeout [<eapol_timeout>] Security Network NAS Agetime [<age_time>] Security Network NAS Holdtime [<hold_time>] **Radius-Assigned** Security Network NAS RADIUS_QoS [global|<port_list>] [enable|disable] Security Network NAS RADIUS_VLAN [global|<port_list>] [enable|disable] **Guest VLAN** Security Network NAS Guest_VLAN [global|<port_list>] [enable|disable] [<vid>] [<reauth_max>] [<allow_if_eapol_seen>] **Example:** Guest_VLAN Global Enabled, Guest VLAN ID=100, Max. Re-Authentication Count = 10, Allow Guest VLAN if EAPOL See = Enable Security/Network>nas gues glob en 100 10 en
NAS Port Configuration	**Syntax**: Security Network NAS State [<port_list>] [auto|authorized|unauthorized|single|multi|macbased] auto= Port-based 802.1X authorized = Force Authorized unauthorized = Force Unauthorized single = Single 802.1X multi= Multi 802.1X macbased = MAC_Based Authentication **Example:** Security/Network>nas state 2 auto
ACL (Access Control List)	
ACL Port Configuration	**Syntax**: Security Network ACL Action [<port_list>] [permit|deny] [<rate_limiter>] [<port_redirect>] [<mirror>] [<logging>] [<shutdown>]

	Parameters: <port_list> : Port list or “all”; default: All ports permit : Permit forwarding (default) deny : Deny forwarding <rate_limiter> : Rate limiter number (1-15) or “disable” <port_redirect>: Port list for copy of frames or “disable” <mirror> : Mirror of frames: enable|disable <logging> : System logging of frames: log|log_disable <shutdown> : Shut down ingress port: shut|shut_disable **Example:** Security/Network/ACL>Action 1 permit 10 dis en log shut **Result:** ACL Configuration: ========== Port Policy Action Rate L. Port C. Mirror Logging Shutdown Counter ---- ------ ------ ------- ------- -------- -------- -------- ------- 1 0 Permit 10 Disabled Enabled Enabled Enabled 0
Rate Limiter	**Syntax**: Security Network ACL Rate [<rate_limiter_list>] [<rate_unit>] [<rate>] **Parameters:** <rate_limiter_list>: Rate limiter list (1-16), default: All rate limiters <rate_unit> : IP flags: pps|kbps, default: pss <rate>: Rate in pps (0-100) or kbps (0, 100, 2*100, 3*100, ..., 1000000) **Example: Rate Limiter ID=10, Rate = 300kbps** Security/Network/ACL>rate 10 kbps 300 **Result:** Rate Limiter Rate ------------ ---- ..... 9 1 PPS 10 300 KBPS .....
ACL Policy	**Syntax:** Security Network ACL Policy [<port_list>] [<policy>] **Example:** Security/Network/ACL>policy 1 2
Access Control List	**Syntax:** Security Network ACL Add [<ace_id>] [<ace_id_next>] [(port <port_list>)] [(policy <policy> <policy_bitmask>)] [<tagged>] [<vid>] [<tag_prio>] [<dmac_type>] [(etype [<etype>] [<smac>] [<dmac>]) | (arp [<sip>] [<dip>] [<smac>] [<arp_opcode>] [<arp_flags>]) | (ip [<sip>] [<dip>] [<protocol>] [<ip_flags>]) | (icmp [<sip>] [<dip>] [<icmp_type>] [<icmp_code>] [<ip_flags>]) | (udp [<sip>] [<dip>] [<sport>] [<dport>] [<ip_flags>]) | (tcp [<sip>] [<dip>] [<sport>] [<dport>] [<ip_flags>]

	[<tcp_flags>])] [permit|deny] [<rate_limiter>] [<port_redirect>] [<mirror>] [<logging>][<shutdown>] **Parameters:** <ace_id> : ACE ID (1-256), default: Next available ID <ace_id_next> : Next ACE ID (1-256), default: Add ACE last port : Port ACE keyword <port_list> : Port list or “all”; default: All ports policy : Policy ACE keyword <policy> : Policy number (0-255) <policy_bitmask>: Policy number bitmask (0x0-0xFF) <tagged> : Tagged of frames: any|enable|disable <vid> : VLAN ID (1-4095) or “any” <tag_prio> : VLAN tag priority (0-7) or “any” <dmac_type> : DMAC type: any|unicast|multicast|broadcast etype : Ethernet Type keyword <etype> : Ethernet Type: 0x600 - 0xFFFF or “any” but excluding 0x800(IPv4) 0x806(ARP) and 0x86DD(IPv6) <smac> : Source MAC address (“xx-xx-xx-xx-xx-xx” or “xx.xx.xx.xx.xx.xx” or “xxxxxxxxxxxx”; x is a hexadecimal digit) or 'any' <dmac> : Destination MAC address (“xx-xx-xx-xx-xx-xx” or “xx.xx.xx.xx.xx.xx” or “xxxxxxxxxxxx”; x is a hexadecimal digit) or “any” arp : ARP keyword <sip> : Source IP address (a.b.c.d/n) or “any” <dip> : Destination IP address (a.b.c.d/n) or “any” <arp_opcode> : ARP operation code: any|arp|rarp|other <arp_flags> : ARP flags: request|smac|tmac|len|ip|ether [0|1|any] ip : IP keyword <protocol> : IP protocol number (0-255) or “any” <ip_flags> : IP flags: ttl|options|fragment [0|1|any] icmp : ICMP keyword <icmp_type> : ICMP type number (0-255) or “any” <icmp_code> : ICMP code number (0-255) or “any” udp : UDP keyword <sport> : Source UDP/TCP port range (0-65535) or 'any' <dport> : Destination UDP/TCP port range (0-65535) or 'any' tcp : TCP keyword <tcp_flags> : TCP flags: fin|syn|rst|psh|ack|urg [0|1|any] permit : Permit forwarding (default) deny : Deny forwarding <rate_limiter> : Rate limiter number (1-15) or “disable” <port_redirect> : Port list for copy of frames or “disable” <mirror> : Mirror of frames: enable|disable <logging> : System logging of frames: log|log_disable <shutdown> : Shut down ingress port: shut|shut_disable **Example:** **Add one ACE:** Security/Network/ACL>add 2 port 6-10 policy 3 8 ip ACE ID 2 added last

	Edit one ACE: Security/Network/ACL>add 1 port 1-5 policy 2 8 any ACE ID 1 modified last **Result:** ID Type Port Policy Frame Action Rate L. Port C. Mirror Counter -- ------- -------- -------- ----- ------ -------- -------- -------- ------- 1 User 1-5 2 /0x8 Any Permit Disabled Disabled Disabled 0 2 User 6-10 3 /0x8 IP Permit Disabled Disabled Disabled 0
DHCP	
DHCP Snooping	**Syntax:** Security Network DHCP Snooping Mode [enable|disable] Security Network DHCP Snooping Port Mode [<port_list>] [trusted|untrusted] Security Network DHCP Snooping Statistics [<port_list>] [clear] **Example:** Security/Network>dhcp snooping mode en Security/Network>dhcp snooping port mode 1 tru (Port 1) Security/Network>dhcp snooping port mode 1-10 tru (Port 1-10)
DHCP Relay	**Syntax:** Security Network DHCP Relay Mode [enable|disable] Security Network DHCP Relay Server [<ip_addr>] Security Network DHCP Relay Information Mode [enable|disable] Security Network DHCP Relay Information Policy [replace|keep|drop] **Example:** Security/Network>dhcp relay server 192.168.2.100 Security/Network>dhcp relay mode en (Assign one Server IP before enable the Relay mode) Security/Network>dhcp rel info mode en Security/Network>dhcp rel info policy keep
IP Source Guard	
IP Source Guard Configuration	**Syntax:** Security Network IP Source Guard Configuration Security Network IP Source Guard Mode [enable|disable] Security Network IP Source Guard Port Mode [<port_list>] [enable|disable] Security Network IP Source Guard limit [<port_list>] [<dynamic_entry_limit>|unlimited] Security Network IP Source Guard Entry [<port_list>] add|delete <vid> <allowed_ip> <allowed_mac> Security Network IP Source Guard Status [<port_list>] Security Network IP Source Guard Translation **Example:** Security/Network>ip source guard mode en Security/Network>ip source guard port mode 1-10 en (Port 1-10)

<table>
<tr><td></td><td>Security/Network>ip source guard limit 1-10 2 (limit 2 MAC Address)</td></tr>
<tr><td>IP Source Guard
Static Table</td><td>Syntax:
Security Network IP Source Guard Entry [<port_list>] add|delete <vid> <allowed_ip> <allowed_mac>

Example:
Security/Network>ip source guard entry 5 add 2 192.168.2.101 001122334455

Result:
IP Source Guard Entry Table:

Type Port VLAN IP Address MAC Address
------- ---- ---- --------------- -----------------
Static 1 1 192.168.2.10 11-22-33-44-55-66
Static 5 2 192.168.2.101 00-0b-16-21-2c-37</td></tr>
<tr><td colspan="2">ARP Inspection</td></tr>
<tr><td>ARP Inspection</td><td>Syntax:
Security Network ARP Inspection Configuration
Security Network ARP Inspection Mode [enable|disable]
Security Network ARP Inspection Port Mode [<port_list>] [enable|disable]
Security Network ARP Inspection Entry [<port_list>] add|delete <vid> <allowed_mac> <allowed_ip>
Security Network ARP Inspection Status [<port_list>]
Security Network ARP Inspection Translation

Example:
Security/Network>arp inspection mode en
Security/Network>arp inspection port mode 1-10 en
Security/Network>arp inspection entry 1 add 10 112233445566 192.168.2.10

Security/Network>arp inspection status

ARP Inspection Entry Table:

Type Port VLAN MAC Address IP Address
------- ---- ---- ----------------- -------------
Static 1 10 0b-16-21-2c-37-42 192.168.2.10</td></tr>
<tr><td colspan="2">Security-AAA Configuration</td></tr>
<tr><td>Common Server
Configuration</td><td>Syntax:
Security AAA Timeout [<timeout>]
Security AAA Deadtime [<dead_time>]</td></tr>
<tr><td>RADIUS
Authentication Server</td><td>Syntax:
Security AAA RADIUS [<server_index>] [enable|disable] [<ip_addr_string>] [<secret>] [<server_port>]

Example:
Security>aaa radi 1 en 192.168.2.200 password 1812</td></tr>
</table>

RADIUS Accounting Server	**Syntax:** Security AAA ACCT_RADIUS [<server_index>] [enable|disable] [<ip_addr_string>] [<secret>] [<server_port>] **Example:** Security>aaa ACCT_radi 1 en 192.168.2.200 password 1813
TACACS+ Authentication Server	**Syntax:** Security AAA TACACS+ [<server_index>] [enable|disable] [<ip_addr_string>] [<secret>] [<server_port>] **Example:** Security>aaa tacacs+ 1 en 192.168.2.200 password 49
AAA Configuration	Security>aaa con AAA Configuration: ========== Server Timeout : 15 seconds Server Dead Time : 300 seconds RADIUS Authentication Server Configuration: ========== Server Mode IP Address Secret Port ------ -------- --------- ---------- ----- 1 Enabled 192.168.2.200 ******** 1812 2 Disabled 1812 3 Disabled 1812 4 Disabled 1812 5 Disabled 1812 RADIUS Accounting Server Configuration: ========== Server Mode IP Address Secret Port ------ -------- --------- ---------- ----- 1 Enabled 192.168.2.200 ******** 1813 2 Disabled 1813 3 Disabled 1813 4 Disabled 1813 5 Disabled 1813 TACACS+ Authentication Server Configuration: ========== Server Mode IP Address Secret Port ------ -------- --------- ---------- ----- 1 Enabled 192.168.2.200 ******** 49 2 Disabled 49 3 Disabled 49 4 Disabled 49 5 Disabled 49 Security>

5.5 Aggregation Configuration

Feature	Command Line

Static Aggregation Configuration	
Aggregation Group Configuration	**Syntax:** Aggr Add <port_list> [<aggr_id>] **Example:** Add port 5-8 to Group 1 >aggr add 5-8 1 >aggr del 1 (Delete the group 1)
Hash Code Contributors	**Syntax:** Aggr Mode [smac|dmac|ip|port] [enable|disable] smac = Source MAC Address dmac = Destination MAC Address ip = IP Address port = TCP/UDP Port Number **Example:** Only the Source MAC Hash is enabled. The rest of the modes are disabled. >agg mode smac en >agg mode dmac dis >agg mode ip dis >agg mode port dis
LACP	
LACP Port Configuration	**Syntax:** LACP Configuration [<port_list>] LACP Mode [<port_list>] [enable|disable] LACP Key [<port_list>] [<key>] LACP Role [<port_list>] [active|passive] LACP Status [<port_list>] LACP Statistics [<port_list>] [clear] **Example:** Configure port 5-8 to a LACP group >lacp mode 5-8 en (Mode = Enable) >lacp key 5-8 100 (Key = 100) >lacp role 5-8 act (Role = Enable)

5.6 Loop Protection

Feature	Command Line
General Settings	
Enable Loop Protection	**Syntax:** Loop Protect Mode [enable|disable] Loop Protect Transmit [<transmit-time>] Loop Protect Shutdown [<shutdown-time>] **Example:** >loop protect mode en
Transmission Time	>loop protect trans 10 (10 seconds)

Shutdown Time	>loop protect shut 200 (200 seconds)
Port Configuration	
Loop Protection - Port Configuration	**Syntax:** Loop Protect Port Mode [<port_list>] [enable|disable] Loop Protect Port Action [<port_list>] [shutdown|shut_log|log] Loop Protect Port Transmit [<port_list>] [enable|disable] **Example:** Loop/Protect>port mode 1 en Loop/Protect>port action 1 shut_log (Shutdown Port and Log) Loop/Protect>port transmit 1 en

5.7 Spanning Tree

Feature	**Command Line**
Bridge Configuration	
Protocol Version	**Syntax:** STP Version [<stp_version>] **Parameters:** <stp_version>: mstp|rstp|stp **Example:** STP>ver rstp
Bridge Priority	**Syntax**: STP Msti Priority [<msti>] [<priority>] **Example**: STP>msti pri MSTI# Bridge Priority ----- --------------- CIST 32768 STP>msti pri 4096 (The available priority parameter includes: 0, 4096, 8192, 12288, 16384, 20480, 24576, 28672, 32768, 36864, 40960, 45056, 49152, 53248, 57344, 61440)
Forward Delay	**Syntax**: STP FwdDelay [<delay>] (Valid values are in the range 4 to 30 seconds)
Max. Age	**Syntax**: STP MaxAge [<max_age>] (Valid values are in the range 6 to 40 seconds, *and* MaxAge must be <= (FwdDelay-1)*2.)
Maximum Hop Count	**Syntax**: STP MaxHops [<maxhops>] (Valid values are in the range 6 to 40 hops)
Transmit Hold Count	**Syntax**: STP Txhold [<holdcount>]

	(Valid values are in the range 1 to 10 BPDUs per second.)
Advanced Setting	**Syntax**: STP bpduFilter [enable|disable] STP bpduGuard [enable|disable] STP recovery [<timeout>] (After recovery timeout time is set, the recovery is enabled automatically.)
MSTI Mapping	
MSTI/VLAN Mapping	**Syntax:** STP Msti Add <msti> <vid-range> **Example:** STP>mst add 1 100 Add VLAN 100 to MSTI1 STP>mst map MSTI VLANs mapped to MSTI ---- ---------- MSTI1 100 MSTI2 No VLANs mapped MSTI3 No VLANs mapped MSTI4 No VLANs mapped MSTI5 No VLANs mapped MSTI6 No VLANs mapped MSTI7 No VLANs mapped
Port Setting	
STP Port Mode	**Syntax:** STP Port Mode [<port_list>] [enable|disable] STP Port Edge [<port_list>] [enable|disable] STP Port AutoEdge [<port_list>] [enable|disable] STP Port P2P [<port_list>] [enable|disable|auto] STP Port RestrictedRole [<port_list>] [enable|disable] STP Port RestrictedTcn [<port_list>] [enable|disable] STP Port bpduGuard [<port_list>] [enable|disable] STP Port Statistics [<port_list>] [clear] **Example:** STP>port mode 1-24 dis (Disable STP on port 1-24) STP>port edge 1-24 en (Enable Edge port on port 1-24) STP>port autoedge 1-24 en (Enable Auto Edge on P1-24) STP>port p2p 1-24 en (Enable P2P mode on P1-24) STP>port p2p 1-24 auto (Enable Automatic P2P detection) STP>port bpdu 1-24 en (Enable BPDUGuard on P1-24)
Port Path Cost	**Syntax:** STP Msti Port Cost [<msti>] [<port_list>] [<path_cost>] **Parameters:** <msti> : STP bridge instance no (0-7, CIST=0, MSTI1=1, ...) <port_list>: Port list or 'all'. Port zero means aggregations. <path_cost>: STP port path cost (1-200000000) or 'auto' **Example: Configure CIST 0 Port Path Cost** STP>msti port cost 0 all auto (Path cost = auto)

	STP>msti port cost 0 all 100000 (Path cost = 100000)
Port Priority	**Syntax:** STP Msti Port Priority [<msti>] [<port_list>] [<priority>] **Parameters:** <msti> : STP bridge instance no (0-7, CIST=0, MSTI1=1, ...) <port_list>: Port list or 'all'. Port zero means aggregations. <priority> : STP port priority (0/16/32/48/.../224/240) **Example: Configure CIST 0 Port Priority** STP Msti Port Priority [<msti>] [<port_list>] [<priority>] STP>msti port priority 0 5 240 (Port 5 Priority = 240) STP>msti port priority 0 all 128 (All Ports' priority = 128) **Example: Configure MSTI 1 Port Priority** STP>msti port priority 1 5 240 (MSTI1 port 5 priority=240)

5.8 MVR

Feature	Command Line
MVR Configuration	
MVR Mode	**Syntax**: MVR Mode [enable|disable]
MVR - VLAN Interface Setting	**Syntax:** MVR VLAN Setup [<mvid>] [add|del|upd] [(Name <mvr_name>)] **Example:** MVR VLAN 2, MVR Name = Source2 MVR>vlan setup 2 add Name Source2
MVR - Port Role	**Syntax:** MVR VLAN Port [<vid>|<mvr_name>] [<port_list>] [source|receiver|inactive] **Example:** Port 2 = Source Port, Port 6-7 = Receiver Port MVR>vlan port 2 2 source MVR>vlan port 2 6-7 rec
Immediately Leave	**Syntax:** MVR Immediate Leave [<port_list>] [enable|disable] **Example:** MVR>immedi leave 1-10 en
MVR Configuration	MVR>conf (View the settings of above configuration) MVR Configuration: ========== MVR Mode: Enabled MVR Interface Setting VID Name Mode Tagging Priority LLQI ---- ---------- ---------- -------- -------- ----- 2 Source2 Dynamic Tagged 0 5 [Port Setting of Source2(VID-2)] Source Port : 2 Receiver Port: 6,7

	Inactive Port: 1,3-5,8-26 [Channel Setting of Source2(VID-2)] <Empty Channel Table> MVR Immediate Leave Setting Port Immediate Leave ---- ---------- 1 Enabled 2 Enabled 3 Enabled 4 Enabled 5 Enabled 6 Enabled 7 Enabled 8 Enabled 9 Enabled 10 Enabled 11 Disabled 12 Disabled

5.9 IPMC

Feature	Command Line
IGMP Snooping Configuration	
IGMP Snooping Enable	**Syntax:** IPMC Mode [mld|igmp] [enable|disable] **Example:** IPMC>mode igmp en
Unregistered IPMCv4 Flooding Enabled	**Syntax:** IPMC Flooding [mld|igmp] [enable|disable] **Example:** IPMC>flood igmp en
IGMP SSM Range (Source-Specific Multicast)	**Syntax:** IPMC SSM [mld|igmp] [(Range <prefix> <mask_len>)] **Example:** IPMC>ssm igmp range 239.0.0.0 8 (Range from 239.0.0.0, mask length=8)
Leave Proxy Enable	**Syntax**: IPMC Leave Proxy [mld|igmp] [enable|disable] **Example:** IPMC>leave proxy igmp en (Enable) IPMC>leave proxy igmp dis (Disable)
Proxy Enable	**Syntax**: IPMC Proxy [mld|igmp] [enable|disable] **Example:** IPMC>proxy igmp en (Enable) IPMC>proxy igmp dis (Disable)
Port Related	**Syntax:**

Configuration (Router Port, Fast Leave, Throttling)	IPMC Router [mld|igmp] [<port_list>] [enable|disable] IPMC Fastleave [mld|igmp] [<port_list>] [enable|disable] IPMC Throttling [mld|igmp] [<port_list>] [limit_group_number] **Example:** IPMC>router igmp 25-26 en (Port 25-26 are router ports) IPMC>Fast igmp 1-24 en (Enable IGMP Fast Leave on P1-24) IPMC>thro igmp 1-2 5 (Throtting of Port 1, 2 is 5 groups.)
VLAN Configuration	**Syntax:** IPMC State [mld|igmp] [<vid>] [enable|disable] IPMC Querier [mld|igmp] [<vid>] [enable|disable] IPMC Compatibility [mld|igmp] [<vid>] [auto|v1|v2|v3] IPMC Parameter RV [mld|igmp] [<vid>] [ipmc_param_rv] IPMC Parameter QI [mld|igmp] [<vid>] [ipmc_param_qi] IPMC Parameter QRI [mld|igmp] [<vid>] [ipmc_param_qri] IPMC Parameter LLQI [mld|igmp] [<vid>] [ipmc_param_llqi] IPMC Parameter URI [mld|igmp] [<vid>] [ipmc_param_uri] **Example:** IPMC>state igmp 2 en (Enable IGMP Snooping on VLAN 2) IPMC>quer igmp 2 en (Enable IGMP Querier on VLAN 2) IPMC>compa igmp 2 v2 (Enable IGMPv2 on VLAN 2)
MLD Snooping	
MLD Snooping	Note: MLD Snooping is applied to IPv6 Multicast. The commands are the same as the above IGMP Snooping (IPv4) Commands. Just choose mld instead of igmp when seeing [mld|igmp] in the syntax. The IP Address should be IPv6 format.

5.10 LLDP Configuration

Feature	Command Line
LLDP Parameters	
LLDP Timers	**Syntax:** LLDP Interval [<interval>] LLDP Hold [<hold>] LLDP Delay [<delay>] LLDP Reinit [<reinit>] **Example:** LLDP>interval 30 LLDP>hold 4 LLDP>delay 2 LLDP>reini 2
LLDP Mode	**Syntax:** LLDP Mode [<port_list>] [enable|disable|rx|tx] (rx=RX Only, tx=TX Only) **Example:** Enable LLDP on Ports

	LLDP>mode 1-10 en (Port 1-10 are enabled) LLDP>mode 1-26 en (Port 1-26 are enabled)
CDP aware	**Syntax:** LLDP cdp_aware [<port_list>] [enable|disable] **Example:** Enable CDP on Port 1-5 LLDP>cdp_a 1-5 en (CDP on Port 1-5 are enabled)
LLDP Optional_TLV Parameters	**Syntax:** LLDP optional_TLV [<port_list>] [port_descr|sys_name|sys_descr|sys_capa|mgmt_addr] [enable|disable] **Example:** LLDP>option 1-3 port en LLDP>option 1-3 sys_name en LLDP>option 1-3 sys_desc en LLDP>option 1-3 sys_capa en LLDP>option 1-3 mgmt_add en

5.11 Power over Ethernet Configuration

Feature	Command Line
PoE Configuration	
PoE Configuration	**Syntax**: PoE Mgmt_mode [class_con|class_res|al_con|al_res|lldp_res|lldp_con] **Parameters:** class_con : Class + Actual Consumption class_res : Class + Reserved Power al_con : Allocation + Actual Consumption al_res : Allocation + Reserved Power lldp_con : LLDP-MED + Actual Consumption lldp_res : LLDP-MED + Reserved Power **Example:** PoE>mgmt class_con
PoE Power Supply Configuration (Warning: The default value is for reference only. If the value is not conducive to your product specification, enter the correct value before you start using PoE function.)	**Syntax**: PoE Maximum_Power [<port_list>] [<port_power>] **Parameters:** <port_list> : Port list or “all”; default: All ports <port_power>: PoE maximum power for the port (0-15.4 W for PoE mode, 0-30.0 W for PoE+ mode) **Example:** PoE>max 1-24 10 (Max. power of Port 1-24 to 10 W) PoE>max 1-24 15.4 (Max. power of Port 1-24 to 15.4 W)
PoE Port Configuration	**Syntax:** PoE Mode [<port_list>] [disabled|poe|poe+] **Parameters:** <port_list>: Port list or 'all', default: All ports disables : Disable PoE poe: Enables PoE IEEE 802.3af (Class 4 limited to 15.4W) poe+: Enables PoE+ IEEE 802.3at (Class 4 limited to 30W) (default: Show PoE's mode) **Example:** Set Port 1-24 ro PoE+ mode

	PoE>mode 1-24 poe+
PoE Status	**Primary Power Supply** PoE>prim Primary Power Supply --- 200 [W] **Port Status** PoE>sta Port PD Class Port Status Power Used [W] Current Used [mA] ---- -------- ---------- ---------- ------- ---------- 1 - No PD detected 0.0 0 2 - No PD detected 0.0 0

5.12 MAC Address Table Configuration

Feature	Command Line
MAC Address Table Configuration	
Aging Time Configuration	**Syntax:** MAC Agetime [<age_time>] **Parameters:** <age_time>: MAC address age time (0,10-1000000) 0=disable **Example:** MAC>age 100 (change aging time to 100 seconds, the aging time range is 10-1000000) MAC>age 0 (0 = Disable Aging time)
MAC Learning Configuration	**Syntax:** MAC Learning [<port_list>] [auto|disable|secure] **Example:** MAC>lear 1-8 sec MAC>lear 9-12 dis MAC>learn 1-12 auto
Static MAC Table	**Syntax:** MAC Add <mac_addr> <port_list> [<vid>] **Example:** MAC>add 0b16212c3742 1-5 1 (This type will be changed to hexadecimal automatically.) MAC>add 0b-16-21-2c-37-42 1-10 1 (This type is hexadecimal; it will not be changed.) **Result:** Non-volatile static: VID MAC Address Ports

	--- ---------- ----- 1 00-10-15-02-25-2a 1-5 1 0b-16-21-2c-37-42 1-10

5.13 VLAN Configuration

Feature	Command Line
VLAN Configuration	
VLAN Membership	**Syntax:** VLAN Add <vid>|<name> [<ports_list>] VLAN Name Add <name> <vid> **Example:** VLAN>add 3 5-8 (Add port 5-8 to VLAN 3) VLAN>name add vlan3 3 (vlan3 is the name of VLAN 3)
Port Configuration	**Syntax:** VLAN FrameType [<port_list>] [all|tagged|untagged] VLAN IngressFilter [<port_list>] [enable|disable] VLAN tx_tag [<port_list>] [untag_pvid|untag_all|tag_all] VLAN PortType [<port_list>] [unaware|c-port|s-port|s-custom-port] **Example:** VLAN>framety 1-3 all VLAN>ingr 1-3 en VLAN>tx_t 1-3 untag_pvid VLAN>portty 1-3 un

5.14 Private VLAN Configuration

Feature	Command Line
PVLAN Configuration	
PVLAN Configuration	**Syntax:** PVLAN Configuration [<port_list>] PVLAN Add <pvlan_id> [<port_list>] PVLAN Delete <pvlan_id> PVLAN Lookup [<pvlan_id>] PVLAN Isolate [<port_list>] [enable|disable] **Example:** PVLAN>add 10 9-12 PVLAN>add 10 1-2 PVLAN>add 20 1-2 PVLAN>add 20 13-18 PVLAN>iso 9-18 en (Enable Isolated Ports) **Result:** PVLAN ID Ports -------- ----- 1 1-8,17-26 10 1,2 20 13-18

5.15 VCL Configuration

Feature	Command Line
MAC-based VLAN Configuration	
MAC-based VLAN Configuration	**Syntax:** VCL Macvlan Add <mac_addr> <vid> [<port_list>] **Example:** VCL/Macvlan>add 001122334455 10 1-4 **Result:** VCL/Macvlan>conf MAC Address VID Ports ---------- ---- ----- 00-0b-16-21-2c-37 10 1-4
Protocol-based VLAN Configuration	
Protocol to Group	**Syntax:** VCL ProtoVlan Protocol Add Eth2 <ether_type>|arp|ip|ipx|at <group_id> **Example:** VCL/ProtoVlan>protocol add Eth2 0x0808 E4
Group to VLAN	**Syntax:** VCL ProtoVlan Vlan Add [<port_list>] <group_id> <vid> **Example:** VCL/ProtoVlan>vlan add 1-8 E4 10
Protocol VLAN Configuration	**Result:** VCL/ProtoVlan>conf Protocol Type Protocol (Value) Group ID ---------- ---------- -------- EthernetII ETYPE:0x808 E4 LLC_Other DSAP:0xff; SSAP:0xff L3 LLC_SNAP OUI-00:e0:2b; PID:0x1 S2 EthernetII ETYPE:0x800 E1 Group ID VID Ports ---------- ---- ----- E4 10 1-8 E1 10 5-8
IP Subnet-based VLAN Configuration	
IP Subnet-based VLAN Configuration	**Syntax:** VCL IPVlan Add [<vce_id>] <ip_addr_mask> <vid> [<port_list>] **Parameters:** <vce_id> : Unique VCE ID for each VCL entry <ip_addr_mask>: Source IP address and mask (Format: a.b.c.d/n). <vid> : VLAN ID (1-4095) <port_list> : Port list or 'all', default: All ports **Example:**

	VCL/IPVlan>add 1 192.168.10.0/24 10 1-10 **Result:** VCE ID IP Address Mask Length VID Ports ------ --------------- ----------- ---- ----- 1 192.168.10.0 24 10 1-10

5.16 Voice VLAN Configuration

Feature	Command Line
Voice VLAN Configuration	
Voice VLAN Configuration	**Syntax:** Voice VLAN Mode [enable|disable] Voice VLAN ID [<vid>] Voice VLAN Agetime [<age_time>] Voice VLAN Traffic Class [<class>] **Example:** Voice>vlan mode en Voice>vlan id 100 Voice>vlan age 86400 Voice>vlan traff class 7 **Result:** Voice VLAN Configuration: ========== Voice VLAN Mode : Enabled Voice VLAN VLAN ID : 100 Voice VLAN Age Time(seconds) : 86400 Voice VLAN Traffic Class : 7
Port Configuration	**Syntax:** Voice VLAN Port Mode [<port_list>] [disable|auto|force] Voice VLAN Security [<port_list>] [enable|disable] Voice VLAN Discovery Protocol [<port_list>] [oui|lldp|both] **Example:** Voice/VLAN>port mode 1-4 auto Voice/VLAN>security 1-4 en Voice/VLAN>disco pro 1-4 both **Result:** Voice VLAN Port Configuration: ========== Port Mode Security Discovery Protocol ---- -------- -------- ---------- 1 Auto Enabled Both 2 Auto Enabled Both 3 Auto Enabled Both 4 Auto Enabled Both
OUI Configuration	**Syntax:** Voice VLAN OUI Add <oui_addr> [<description>] Voice VLAN OUI Delete <oui_addr> Voice VLAN OUI Clear Voice VLAN OUI Lookup [<oui_addr>] **Example:** Voice/VLAN>oui add 00-12-08 hello **Result:**

	Voice/VLAN>oui lookup Voice VLAN OUI Table: ========== Telephony OUI Description ------------ ----------- 00-01-E3 Siemens AG phones 00-03-6B Cisco phones 00-0F-E2 H3C phones 00-60-B9 Philips and NEC AG phones 00-D0-1E Pingtel phones 00-E0-75 Polycom phones 00-E0-BB 3Com phones 00-12-77 e10 00-12-08 hello

5.17 QoS Configuration

Feature	Command Line
QoS Configuration	
Port Classification	**Syntax:** QoS Port Classification Class [<port_list>] [<class>] QoS Port Classification DPL [<port_list>] [<dpl>] QoS Port Classification PCP [<port_list>] [<pcp>] QoS Port Classification DEI [<port_list>] [<dei>] QoS Port Classification Tag [<port_list>] [enable|disable] QoS Port Classification Map [<port_list>] [<pcp_list>] [<dei_list>] [<class>] [<dpl>] QoS Port Classification DSCP [<port_list>] [enable|disable] **Range of the Value:** <class>: QoS class (0-7) <dpl>: Drop Precedence Level (0-1) <pcp>: Priority Code Point (0-7) <dei>: Drop Eligible Indicator (0-1) **Example:** QoS/Port/Classification>clas 1-2 7 QoS/Port/Classification>dpl 1-2 1 QoS/Port/Classification>pcp 1-2 7 QoS/Port/Classification>dei 1-2 1 QoS/Port/Classification>tag 1-2 en QoS/Port/Classification>dscp 1-2 en
QoS Ingress Port Tag Classification	**Syntax:** QoS Port Classification Map [<port_list>] [<pcp_list>] [<dei_list>] [<class>] [<dpl>]
Port Policing	**Syntax:** QoS Port Policer Mode [<port_list>] [enable|disable] QoS Port Policer Rate [<port_list>] [<rate>] QoS Port Policer Unit [<port_list>] [kbps|fps] QoS Port Policer FlowControl [<port_list>] [enable|disable] <rate> : Rate in kbps or fps (100-3300000) **Example:**

	QoS/Port/Policer>mode 1-2 en QoS/Port/Policer>rate 1-2 300 QoS/Port/Policer>unit 1-2 kbps QoS/Port/Policer>flow 1-2 en
Port Scheduler	**Syntax:** Syntax: QoS Port Scheduler Mode [<port_list>] [strict|weighted] **Example:** QoS/Port/Scheduler>mode 1-2 stric (Strict Priority) QoS/Port/Scheduler>mode 1-2 wei (Weighted) **QoS Egress Port Scheduler and Shapers** QoS/Port/Scheduler>wei 1-2 1 30 (Port 1-2, Q1=30) QoS/Port/Scheduler>wei 1-2 2 30 (Port 1-2, Q2=30) 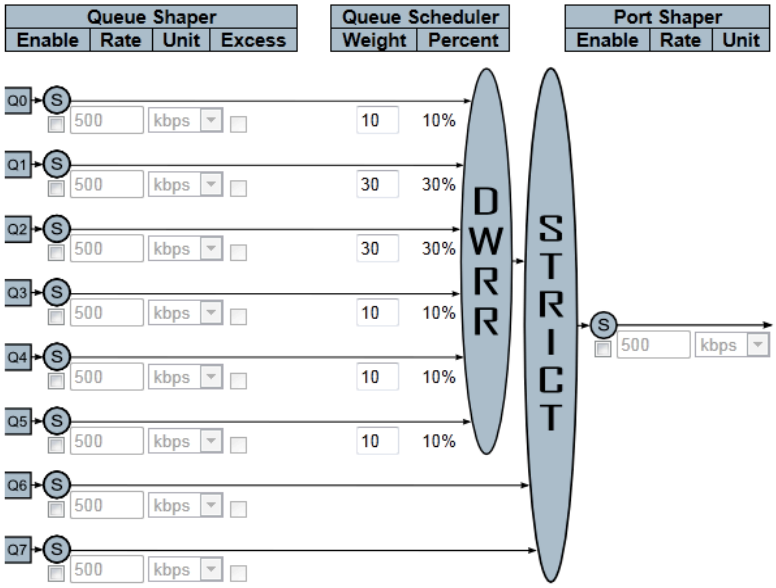
Port Shaping	**Syntax:** **Port Shaper:** QoS Port Shaper Mode [<port_list>] [enable|disable] QoS Port Shaper Rate [<port_list>] [<bit_rate>] **Queue Shaper:** QoS Port QueueShaper Mode [<port_list>] [<queue_list>] [enable|disable] QoS Port QueueShaper Rate [<port_list>] [<queue_list>] [<bit_rate>] QoS Port QueueShaper Excess [<port_list>] [<queue_list>] [enable|disable] **Parameters:** <port_list>: Port list or “all”; default: All ports <bit_rate> : Rate in kilo bits per second (100-3300000) **Example:** QoS/Port/Shaper>rate 1-2 1000 QoS/Port/QueueShaper>mode 1-2 all en (Queue Shaper) QoS/Port/QueueShaper>rate 1-2 all 600 (Queue Shaper)

DSCP Configuration	**Syntax:** QoS Port DSCP Translation [<port_list>] [enable|disable] QoS Port DSCP Classification [<port_list>] [none|zero|selected|all] QoS Port DSCP EgressRemark [<port_list>] [disable|enable|remap_dp_unaware|remap_dp_aware] Note*: DSCP is an advanced QoS setting. Follow the DSCP table of upper access/core switch to configure the table. The table of the whole network must be unified.*
Storm Configuration	
Storm Control	**Syntax:** QoS Storm Unicast [enable|disable] [<packet_rate>] QoS Storm Multicast [enable|disable] [<packet_rate>] QoS Storm Broadcast [enable|disable] [<packet_rate>] <packet_rate>: Rate in fps (1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1k, 2k, 4k, 8k, 16k, 32k, 64k, 128k, 256k, 512k, 1024k, 2048k, 4096k, 8192k, 16384k, 32768k) **Example:** QoS/Storm>unic en 32768k QoS/Storm>multi en 4096k QoS/Storm>broad en 4k

5.18 Mirroring Configuration

Feature	Command Line
Mirroring Configuration	
Mirror Configuration	**Syntax:** Mirror Port [<port>|disable] Mirror Mode [<port_cpu_list>] [enable|disable|rx|tx] **Example:** Mirror>port 5 Mirror>mode 6-8 en **Result:** Mirror Configuration: ========== Mirror Port: 5 Port Mode ---- -------- 1 Disabled 2 Disabled 3 Disabled 4 Disabled 5 Disabled 6 Enabled 7 Enabled 8 Enabled

5.19 UPnP Configuration

Feature	Command Line
UPnP Configuration	
UPnp Configuration	**Syntax:** UPnP Configuration UPnP Mode [enable|disable] UPnP TTL [<ttl>] UPnP AdvertisingDuration [<duration>] **Example:** UPnP>mode en UPnP>ttl 5 (Default=4) UPnP>adver 200 (Default=100) **Result:** UPnP Configuration: ========== UPnP Mode : Enabled UPnP TTL : 5 UPnP Advertising Duration : 200

5.20 sFlow Configuration

Feature	Command Line
sFlow Configuration	
Receiver Configuration	**Syntax:** sFlow Receiver [release] [<timeout>] [<ip_addr_host>] [<udp_port>] [<datagram_size>] **Example:** sFlow>receiver 10 192.168.2.100 6343 1400 **Result:** Receiver Configuration: ========== Owner : <none> Receiver : 192.168.2.100 UDP Port : 6343 Max. Datagram: 1400 bytes Time left : 0 seconds
Receiver Release	sFlow>receiver
Port Configuration	**Syntax:** sFlow Receiver [release] [<timeout>] [<ip_addr_host>] [<udp_port>] [<datagram_size>] sFlow FlowSampler [<port_list>] [<sampling_rate>] [<max_hdr_size>] sFlow CounterPoller [<port_list>] [<interval>] sFlow Statistics Receiver [clear] sFlow Statistics Samplers [<port_list>] [clear] **Example:**

	sFlow>flow 1-2 10 128 (Enable FlowSample on port 1-2, rate=10, max. size=128) sFlow>coun 1-2 5 (Enable CounterPoller of port 1-2, and set interval to 5) sFlow>statistic sample 1-2 Per-Port Statistics: ========== Port Rx Flow Samples Tx Flow Samples Counter Samples ---- ---------- ---------- ---------- 1 0 0 0 2 0 0 0

5.21 Diagnostic Commands

Feature	Command Line
Ping	
Ping Test	**Syntax:** IP Ping <ip_addr_string> [(Length <ping_length>)] [(Count <ping_count>)] [(Interval <ping_interval>)] **Parameters:** <ip_addr_string>: IPv4 host address (a.b.c.d) or a host name string length : PING Length keyword <ping_length> : Ping ICMP data length (2-1452; Default is 56), excluding MAC, IP and ICMP headers count : PING Count keyword <ping_count> : Transmit ECHO_REQUEST packet count (1-60; Default is 5) interval : PING Interval keyword <ping_interval> : Ping interval (0-30; Default is 0) **Example:** Ping IP 192.168.2.100 IP>ping 192.168.2.100 PING server 192.168.2.100, 56 bytes of data. 64 bytes from 192.168.2.100: icmp_seq=0, time=0ms 64 bytes from 192.168.2.100: icmp_seq=1, time=0ms 64 bytes from 192.168.2.100: icmp_seq=2, time=0ms 64 bytes from 192.168.2.100: icmp_seq=3, time=0ms 64 bytes from 192.168.2.100: icmp_seq=4, time=0ms Sent 5 packets, received 5 OK, 0 bad
IPv6 Ping Test	**Syntax:** IP IPv6 Ping6 <ipv6_addr> [(Length <ping_length>)] [(Count <ping_count>)] [(Interval <ping_interval>)] **Example:** poeswitch:/IP>ipv6 ping6 2001:DB8::250:8bff:fee8:f800
VeriPHY	**Syntax:** Port VeriPHY [<port_list>] **Example:**

	Port>veriphy 24 Starting VeriPHY, please wait Port Pair A Length Pair B Length Pair C Length Pair D Length ----- -------- ------- -------- ------- -------- ------- -------- ------ 24 OK 0 OK 0 OK 0 OK 0

5.22 Maintenance Commands

Feature	Command Line
Maintenance Commands	
Restart Device	**Syntax:** System Reboot **Example:** System>reb System will reboot in a few seconds
Factory Defaults	**Syntax:** System Restore Default [keep_ip] **Example:**
Software/Firmware (Firmware Version, Firmware Swapping, Firmware Update)	**Syntax:** Firmware Information Firmware Swap Firmware Load <ip_addr_string> <file_name> **Parameters of Firmware Load:** <ip_addr_string>: IP host address (a.b.c.d) or a host name string <file_name> : Firmware file name **Example:** **Firmware Swapping** Firmware>sw ... Erase from 0x40fd0000-0x40fdffff: . ... Program from 0x87ff0000-0x88000000 to 0x40fd0000: . ... Program from 0x87ff000a-0x87ff000c to 0x40fd000a: . Alternate image activated, now rebooting. **Firmware Update** Firmware>load 192.168.2.100 SMBStaX.dat Downloaded "SMBStaX.dat"; 3415213 bytes Master initiated software updating starting Waiting for firmware update to complete Starting flash update - do not power off device! Erasing image... Programming image... **Note 1:** The switch processes the firmware upgrading through the TFTP protocol. When running firmware upgrading, open the TFTP tool as the TFTP server for the switch. For example: TFTPd32 is a freeware TFTP server you can download from the Internet. Browse the directory of the firmware file and select the correct server interface. If you failed to upload the file, remember to shut down the firewall of your computer. The process may be terminated by your firewall.

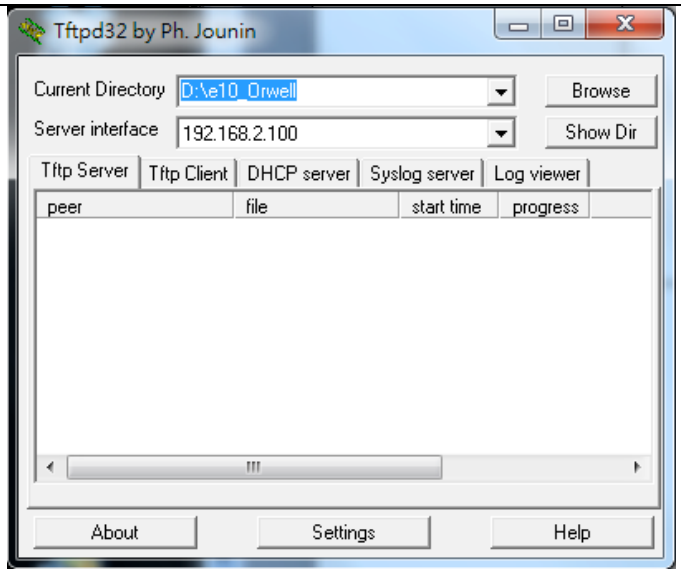

Note 2: While the firmware uploading process is started, don't shut down the switch!

6. Web Configuration - Monitor, Diagnostic, Maintenance

6.1 Monitor

6.1.1 Monitor / System

6.1.1.1 Monitor / System / Information

The switch system information is provided here.

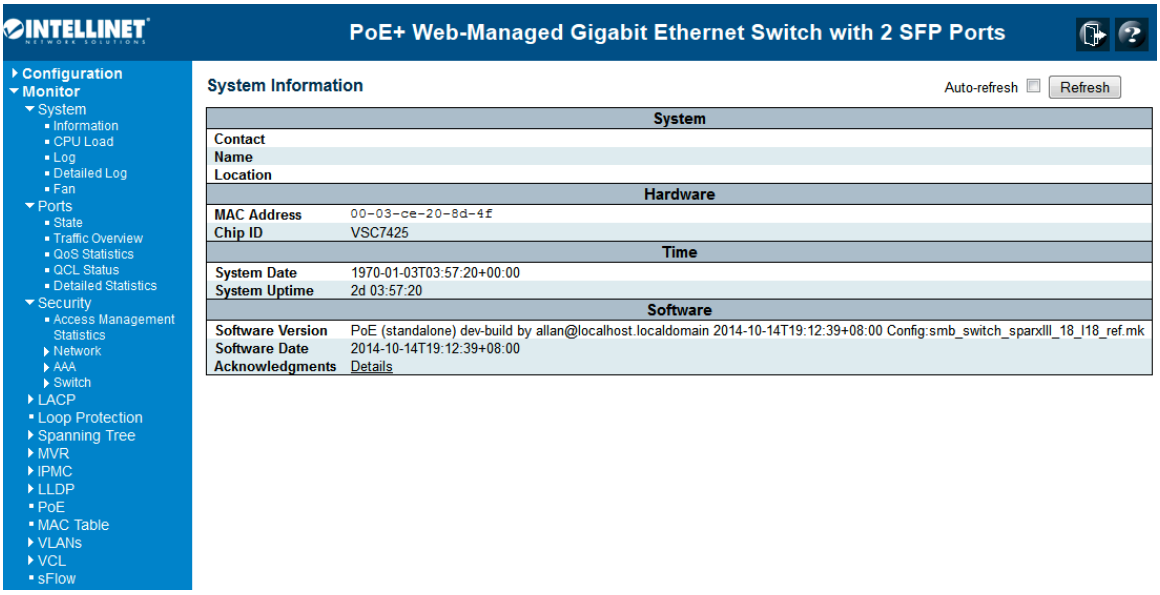

Contact

The system contact configured in Configuration | System | Information | System Contact.

Name

The system name configured in Configuration | System | Information | System Name.

Location

The system location configured in Configuration | System | Information | System Location.

MAC Address

The MAC Address of this switch.

Chip ID

The Chip ID of this switch.

System Date

The current (GMT) system time and date. The system time is obtained through the configured NTP Server, if any.

System Uptime

The period of time the device has been operational.

Software Version

The software version of this switch.

Software Date

The date when the switch software was produced.

Buttons

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

Refresh : Click to refresh the page; any changes made locally will be undone.

6.1.1.2 CPU Load

This page displays the CPU load, using an SVG graph.

The load is measured as averaged over the last 100 ms, 1 sec and 10 second intervals. The last 120 samples are graphed, and the last numbers are displayed as text, as well.

In order to display the SVG graph, your browser must support the SVG format. Consult the SVG Wiki for more information on browser support. Specifically, at the time of this writing, Microsoft Internet Explorer will need to have a plugin installed to support SVG.

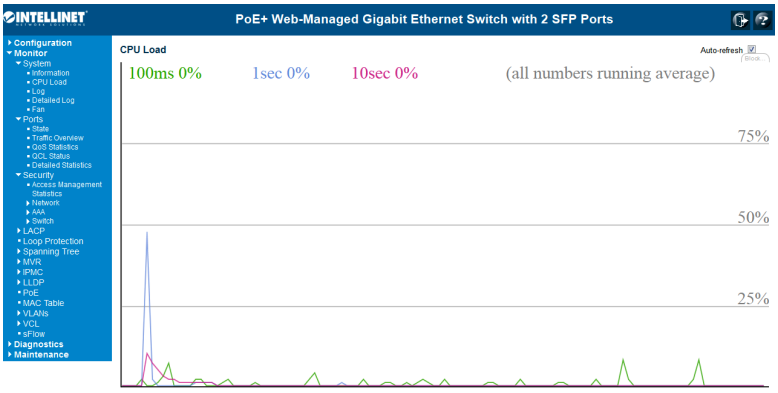

Buttons:

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

6.1.1.3 System Log Information

The switch system log information is provided here.

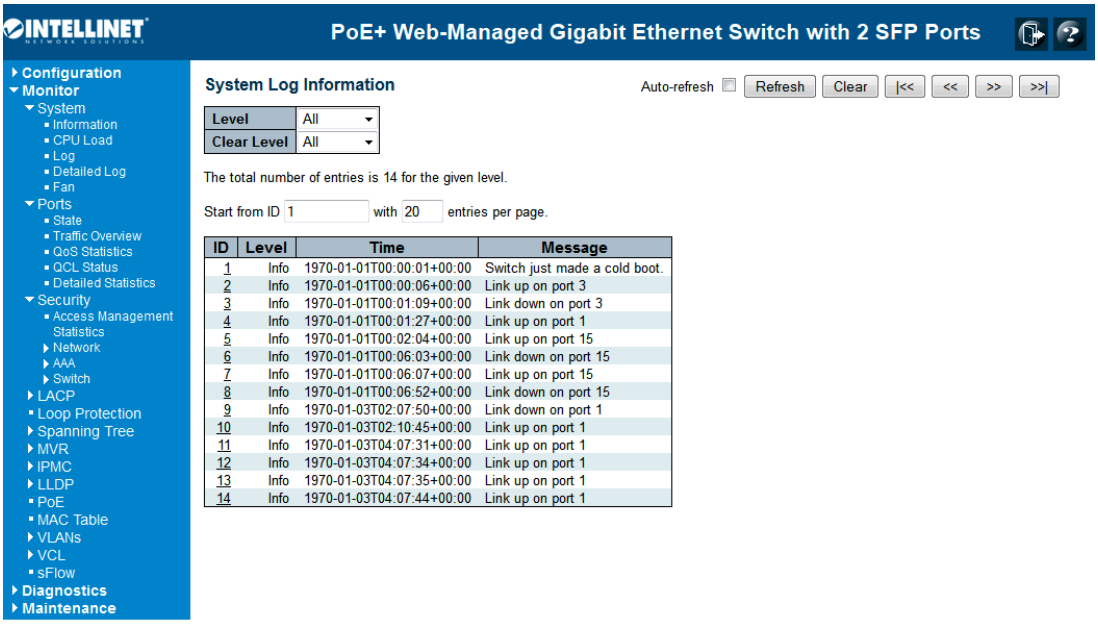

ID

The ID (>= 1) of the system log entry.

Level

The level of the system log entry. The following level types are supported:

Info: Information level of the system log.

Warning: Warning level of the system log.

Error: Error level of the system log.

All: All levels.

Time

The time of the system log entry.

Message

The message of the system log entry.

Buttons

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Updates the system log entries, starting from the current entry ID.

Clear: Flushes all system log entries.

|<<: Updates the system log entries, starting from the first available entry ID.

<<: Updates the system log entries, ending at the last entry currently displayed.

>>: Updates the system log entries, starting from the last entry currently displayed.

>>|: Updates the system log entries, ending at the last available entry ID.

6.1.1.4 System / Detailed Log

The switch detailed log information is provided here.

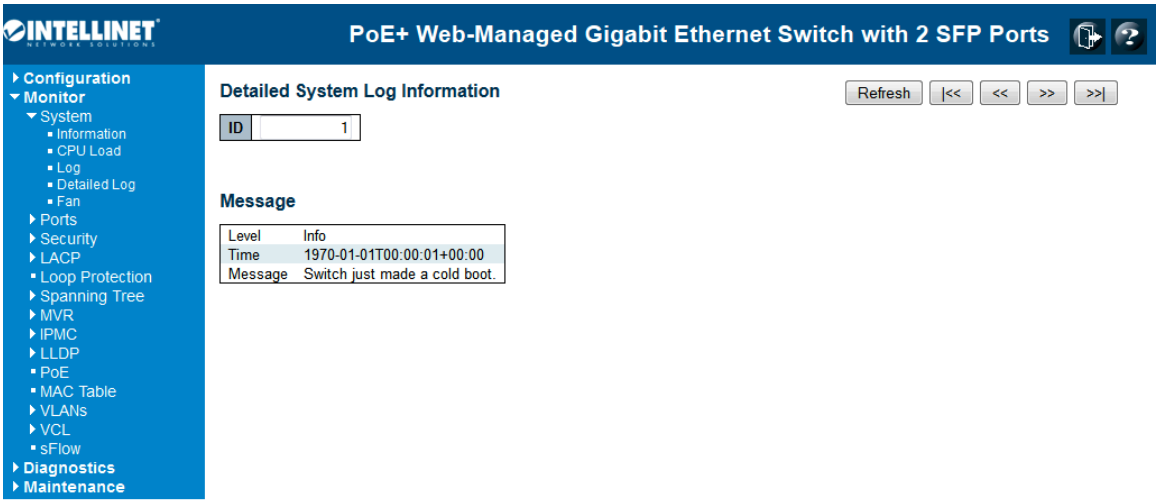

ID

The ID (>= 1) of the system log entry.

Message

The detailed message of the system log entry.

Buttons

Refresh : Updates the system log entry to the current entry ID.

/<<: Updates the system log entry to the first available entry ID.

<<: Updates the system log entry to the previous available entry ID.

>>: Updates the system log entry to the next available entry ID.

>>/: Updates the system log entry to the last available entry ID.

6.1.2 Monitor / Port State

6.1.2.1 Port State

This page provides an overview of the current switch port states.

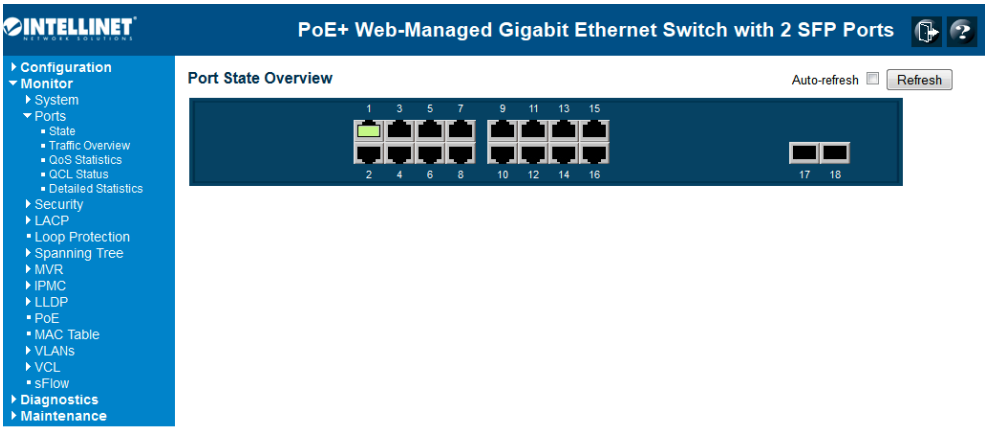

The port states are illustrated as follows:

RJ45 ports			
SFP ports			
State	Disabled	Down	Link

Buttons

Auto-refresh : Check this box to refresh the page automatically. Automatic refresh occurs at regular intervals.

Refresh: Click to refresh the page; any changes made locally will be undone.

6.1.2.2 Traffic Overview

This page provides an overview of general traffic statistics for all switch ports.

The displayed counters:

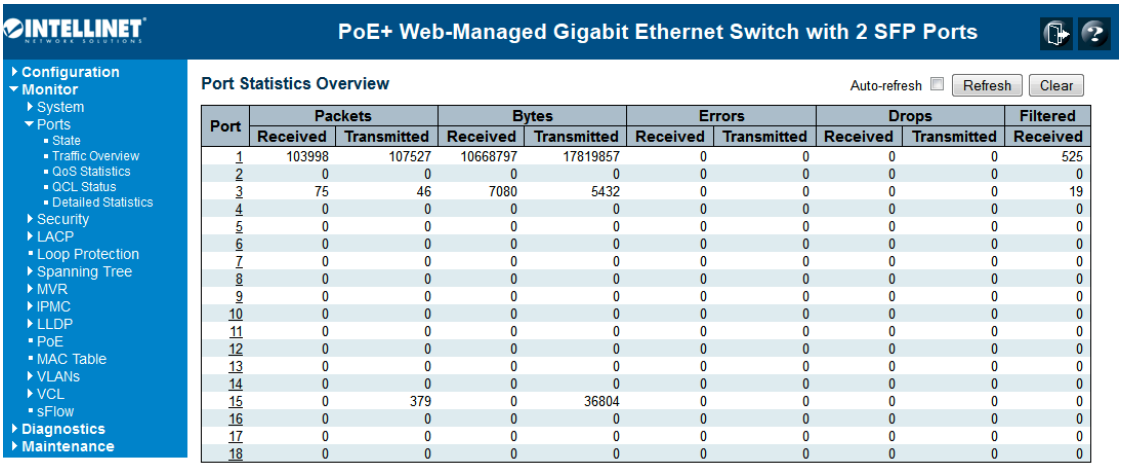
INTELLINET
PoE+ Web-Managed Gigabit Ethernet Switch with 2 SFP Ports
Configuration
Monitor
System
Ports
State
Traffic Overview
QoS Statistics
QCL Status
Detailed Statistics
Security
LACP
Loop Protection
Spanning Tree
MVR
IPMC
LLDP
PoE
MAC Table
VLANs
VCL
sFlow
Diagnostics
Maintenance
Port Statistics Overview
Auto-refresh
Refresh
Clear
Port
Packets
Bytes
Errors
Drops
Filtered
Received
Transmitted
1 103998 107527 10668797 17819857 0 0 0 0 525
2 0 0 0 0 0 0 0 0 0
3 75 46 7080 5432 0 0 0 0 19
4 0 0 0 0 0 0 0 0 0
5 0 0 0 0 0 0 0 0 0
6 0 0 0 0 0 0 0 0 0
7 0 0 0 0 0 0 0 0 0
8 0 0 0 0 0 0 0 0 0
9 0 0 0 0 0 0 0 0 0
10 0 0 0 0 0 0 0 0 0
11 0 0 0 0 0 0 0 0 0
12 0 0 0 0 0 0 0 0 0
13 0 0 0 0 0 0 0 0 0
14 0 0 0 0 0 0 0 0 0
15 0 379 0 36804 0 0 0 0 0
16 0 0 0 0 0 0 0 0 0
17 0 0 0 0 0 0 0 0 0
18 0 0 0 0 0 0 0 0 0

Port

The logical port for the settings contained in the same row.

Packets

The number of received and transmitted packets per port.

Bytes

The number of received and transmitted bytes per port.

Errors

The number of frames received in error and the number of incomplete transmissions per port.

Drops

The number of frames discarded due to ingress or egress congestion.

Filtered

The number of received frames filtered by the forwarding process.

Buttons

Refresh: Click to refresh the page immediately.

Clear: Clears the counters for all ports.

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

6.1.2.3 QoS Statistics

This page provides statistics for the different queues for all switch ports.

The displayed counters:

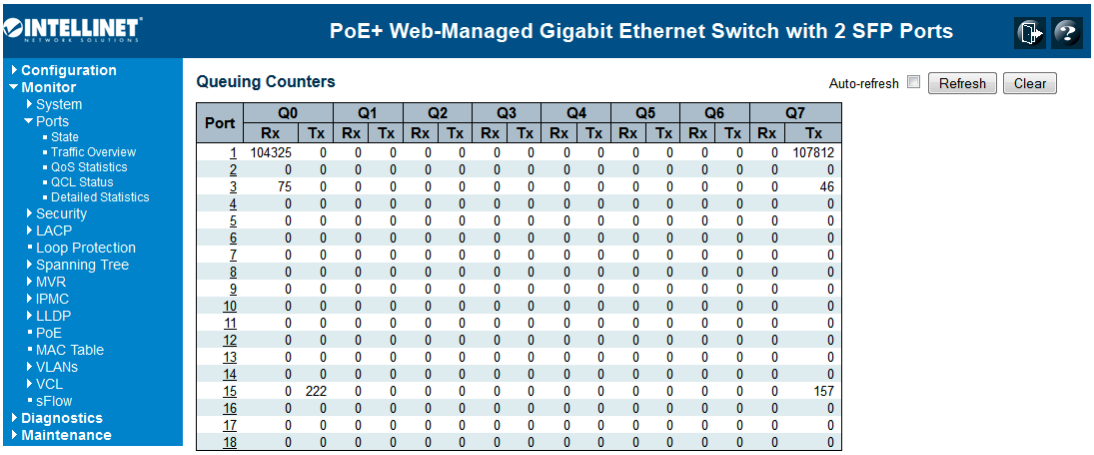

Port	Q0		Q1		Q2		Q3		Q4		Q5		Q6		Q7	
	Rx	Tx	Rx	Tx	Rx	Tx	Rx	Tx	Rx	Tx	Rx	Tx	Rx	Tx	Rx	Tx
1	104325	0	0	0	0	0	0	0	0	0	0	0	0	0	0	107812
2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3	75	0	0	0	0	0	0	0	0	0	0	0	0	0	0	46
4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
8	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
9	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
10	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
11	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
13	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
14	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
15	0	222	0	0	0	0	0	0	0	0	0	0	0	0	0	157
16	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
17	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Port

The logical port for the settings contained in the same row.

Qn

There are eight QoS queues per port. Q0 is the lowest priority queue.

Rx/Tx

The number of received and transmitted packets per queue.

Buttons

Refresh: Click to refresh the page immediately.

Clear: Clears the counters for all ports.

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

6.1.2.4 QCL Status

This page shows the QCL status of different QCL users. Each row describes the QCE that is defined. It is a conflict if a specific QCE is not applied to the hardware due to hardware limitations. The maximum number of QCEs is **256** on each switch.

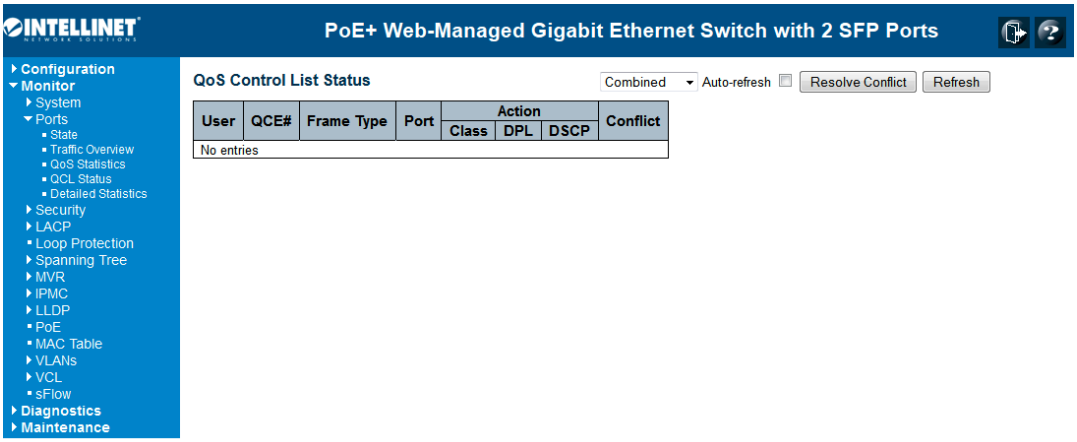

User

Indicates the QCL user.

QCE#

Indicates the index of QCE.

Frame Type

Indicates the type of frame to look for incomming frames. Possible frame types:

Any: The QCE will match all frame type.

Ethernet: Only Ethernet frames (with Ether Type 0x600-0xFFFF) are allowed.

LLC: Only (LLC) frames are allowed.

SNAP: Only (SNAP) frames are allowed.

IPv4: The QCE will match only IPV4 frames.

IPv6: The QCE will match only IPV6 frames.

Port

Indicates the list of ports configured with the QCE.

Action

Indicates the classification action taken on an ingress frame if the parameters configured are matched with the frame's content.

There are three action fields: Class, DPL and DSCP.

Class: Classified QoS class; if a frame matches the QCE, it will be put in the queue.

DPL: Drop Precedence Level; if a frame matches the QCE, then the DP level will set to the value displayed in the DPL column.

DSCP: If a frame matches the QCE, then DSCP will be classified with the value displayed in the DSCP column.

Conflict

Displays Conflict status of QCL entries. As H/W resources are shared by multiple applications, it may happen that resources required to add a QCE may not be available. In that case, it shows conflict status as “Yes”; otherwise it is always “No.” Note that conflict can be resolved by releasing the H/W resources required to add a QCL entry by clicking “Resolve Conflict.”

Buttons

: Select the QCL status from this drop-down list.

Auto-refresh : Check this box to refresh the page automatically. Automatic refresh occurs at regular intervals.

Resolve Conflict: Click to release the resources required to add a QCL entry in case the conflict status for any QCL entry is “Yes.”

Refresh: Click to refresh the page; any changes made locally will be undone.

6.1.2.5 Detailed Port Statistics

This page provides detailed traffic statistics for a specific switch port. Use the port select box to select which switch port details to display.

The displayed counters are the totals for receive and transmit, the size counters for receive and transmit, and the error counters for receive and transmit.

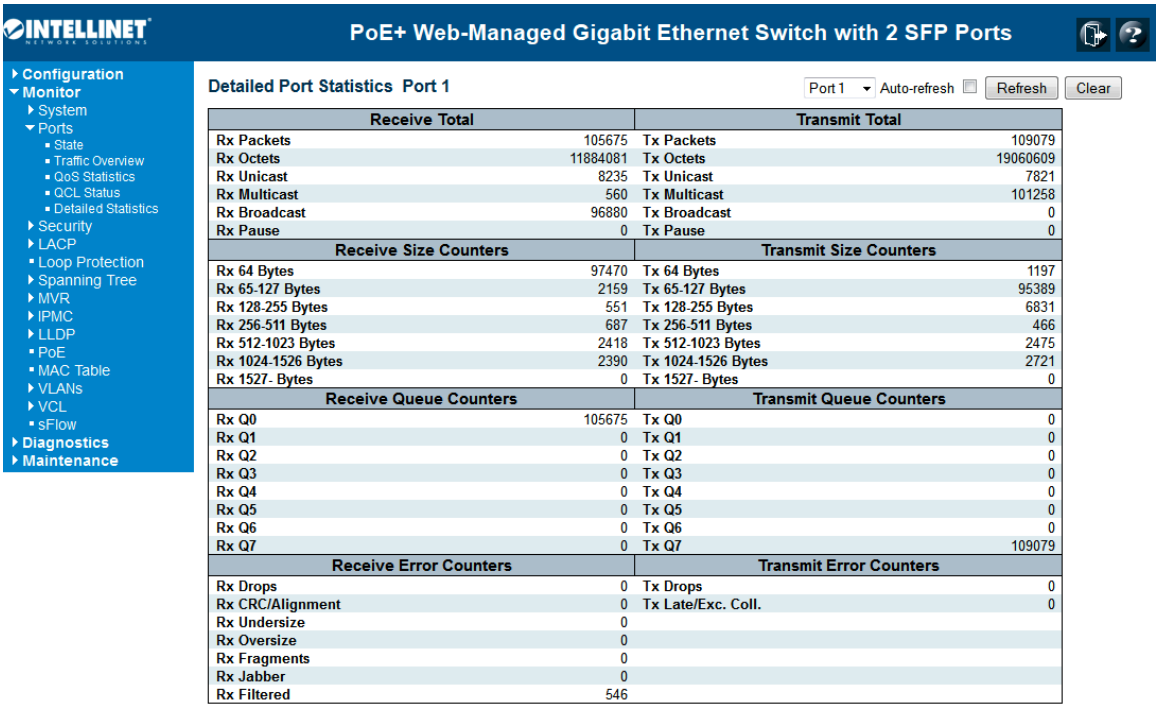

Receive Total and Transmit Total

Rx and Tx Packets

The number of received and transmitted (good and bad) packets.

Rx and Tx Octets

The number of received and transmitted (good and bad) bytes. Includes FCS, but excludes framing bits.

Rx and Tx Unicast

The number of received and transmitted (good and bad) unicast packets.

Rx and Tx Multicast

The number of received and transmitted (good and bad) multicast packets.

Rx and Tx Broadcast

The number of received and transmitted (good and bad) broadcast packets.

Rx and Tx Pause

A count of the MAC Control frames received or transmitted on this port that have an opcode indicating a PAUSE operation.

Receive and Transmit Size Counters

The number of received and transmitted (good and bad) packets split into categories based on their respective frame sizes.

Receive and Transmit Queue Counters

The number of received and transmitted packets per input and output queue.

Receive Error Counters

Rx Drops

The number of frames dropped due to lack of receive buffers or egress congestion.

Rx CRC/Alignment

The number of frames received with CRC or alignment errors.

Rx Undersize

The number of short [1] frames received with valid CRC.

Rx Oversize

The number of long [2] frames received with valid CRC.

Rx Fragments

The number of short [1] frames received with invalid CRC.

Rx Jabber

The number of long [2] frames received with invalid CRC.

Rx Filtered

The number of received frames filtered by the forwarding process.

[1] Short frames are frames that are smaller than 64 bytes.

[2] Long frames are frames that are longer than the configured maximum frame length for this port.

Transmit Error Counters

Tx Drops

The number of frames dropped due to output buffer congestion.

Tx Late/Exc. Coll.

The number of frames dropped due to excessive or late collisions.

Buttons

The port select box determines which port is affected by clicking the buttons.

Refresh: Click to refresh the page immediately.

Clear: Clears the counters for the selected port.

Auto-refresh ☐ : Check this box to enable an automatic refresh of the page at regular intervals.

6.1. 3 Monitor / Security

6.1.3.1 Security / Access Management Statistics

This page provides statistics for access management.

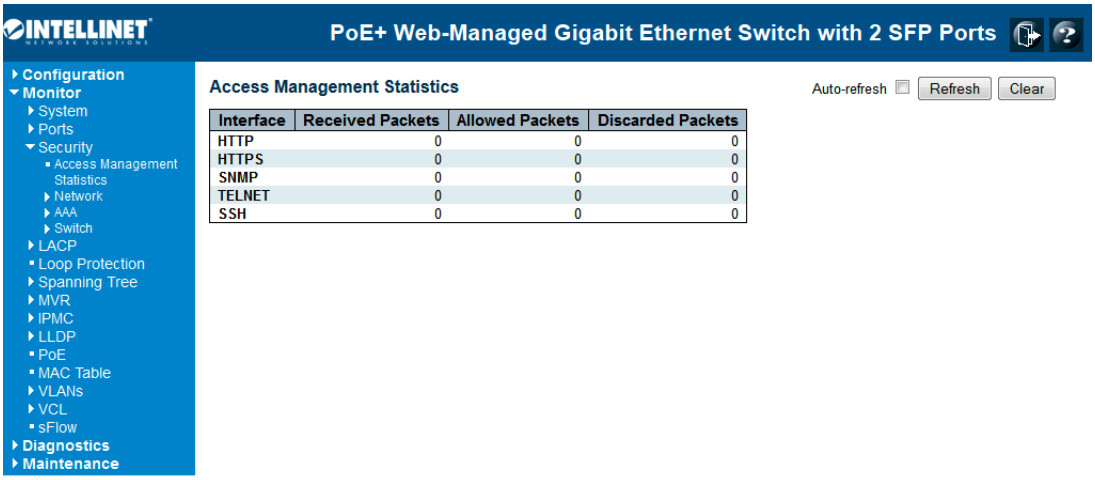

Interface

The interface type through which the remote host can access the switch.

Received Packets

Number of received packets from the interface when access management mode is enabled.

Allowed Packets

Number of allowed packets from the interface when access management mode is enabled.

Discarded Packets

Number of discarded packets from the interface when access management mode is enabled.

Buttons

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

Clear: Clear all statistics.

6.1.3.2 Security / Network

Port Security Switch Status

This page shows the Port Security status. Port Security is a module with no direct configuration. Configuration comes indirectly from other modules — the user modules. When a user module has enabled port security on a port, the port is set up for software-based learning. In this mode, frames from unknown MAC addresses are passed on to the port security module, which in turn asks all user modules whether to allow this new MAC address to forward or block it. For a MAC address to be set in the forwarding state, all enabled user modules must unanimously agree on allowing the MAC address to forward. If only one chooses to block it, it will be blocked until that user module decides otherwise.
The status page is divided into two sections: one with a legend of user modules and one with the actual port status.

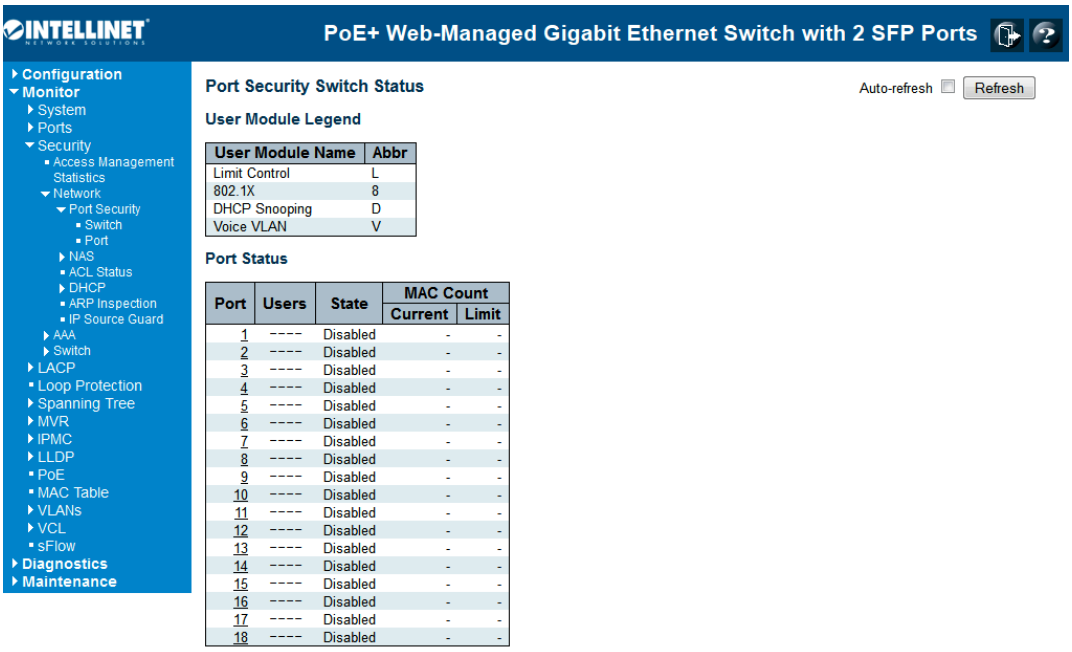

User Module Legend

The legend shows all user modules that may request Port Security services.

User Module Name

The full name of a module that may request Port Security services.

Abbr

A one-letter abbreviation of the user module. This is used in the Users column in the port status table.

Port Status

The table has one row for each port on the switch and a number of columns:

Port

The port number for which the status applies. Click the port number to see the status for this particular port.

Users

Each of the user modules has a column that shows whether that module has enabled Port Security or not. A dash / hyphen (-) means that the corresponding user module is not enabled, whereas a letter indicates that the user module abbreviated by that letter (see Abbr) has enabled port security.

State

Shows the current state of the port. It can take one of four values:

Disabled: No user modules are currently using the Port Security service.
Ready: The Port Security service is in use by at least one user module, and is awaiting frames from unknown MAC addresses to arrive.
Limit Reached: The Port Security service is enabled by at least the Limit Control user module, and that module has indicated that the limit is reached and no more MAC addresses should be taken in.
Shutdown: The Port Security service is enabled by at least the Limit Control user module, and that module has indicated that the limit is exceeded. No MAC addresses can be learned on the port until it is administratively re-opened on the Limit Control configuration Web page.

MAC Count (Current, Limit)

The two columns indicate the number of currently learned MAC addresses (forwarding as well as blocked) and the maximum number of MAC addresses that can be learned on the port, respectively.
If no user modules are enabled on the port, the Current column will show a dash (-).
If the Limit Control user module is not enabled on the port, the Limit column will show a dash (-).

Buttons

Refresh: Click to refresh the page immediately.
Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Port Security Port Status

This page shows the MAC addresses secured by the Port Security module. Port Security is a module with no direct configuration. Configuration comes indirectly from other modules: the user modules. When a user module has enabled port security on a port, the port is set up for software-based learning. In this mode, frames from unknown MAC addresses are passed on to the port security module, which in turn asks all user modules whether to allow this new MAC address to forward or block it. For a MAC address to be set in the forwarding state, all enabled user modules must unanimously agree on allowing the MAC address to forward. If only one chooses to block it, it will be blocked until that user module decides otherwise.

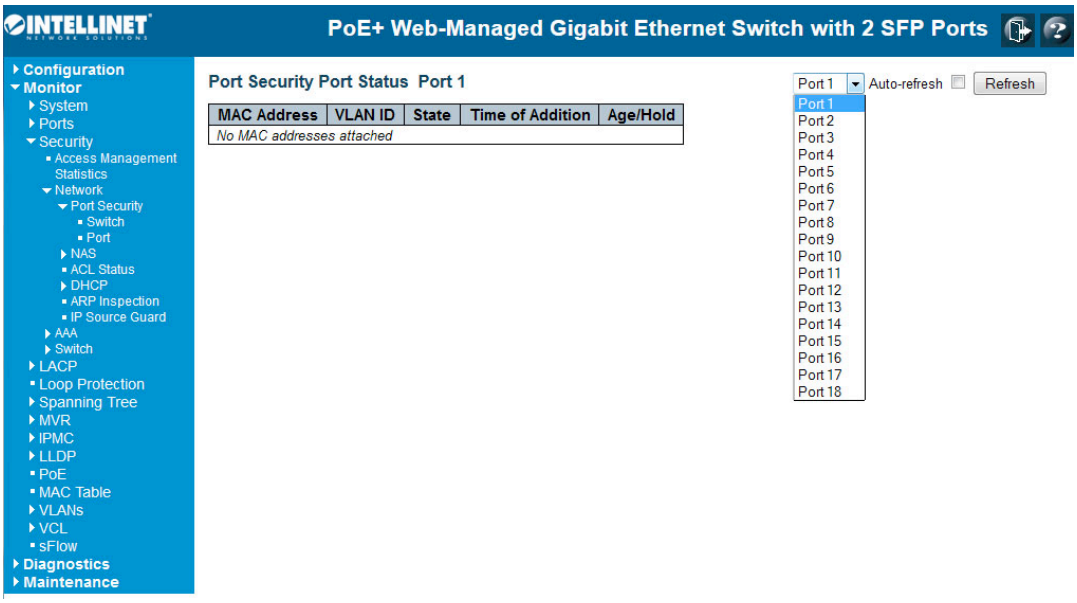

MAC Address & VLAN ID

The MAC address and VLAN ID that is seen on this port. If no MAC addresses are learned, a single row stating *"No MAC addresses attached"* is displayed.

State

Indicates whether the corresponding MAC address is blocked or forwarding. In the blocked state, it will not be allowed to transmit or receive traffic.

Time of Addition

Shows the date and time when this MAC address was first seen on the port.

Age/Hold

If at least one user module has decided to block this MAC address, it will stay in the blocked state until the hold time (measured in seconds) expires. If all user modules have decided to allow this MAC address to forward, and aging is enabled, the Port Security module will periodically check that this MAC address still forwards traffic. If the age period (measured in seconds) expires and no frames have been seen, the MAC address will be removed from the MAC table. Otherwise, a new age period will begin.

If aging is disabled or a user module has decided to hold the MAC address indefinitely, a dash (-) will be shown.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Security / Network / NAS

This page provides an overview of the current NAS port states.

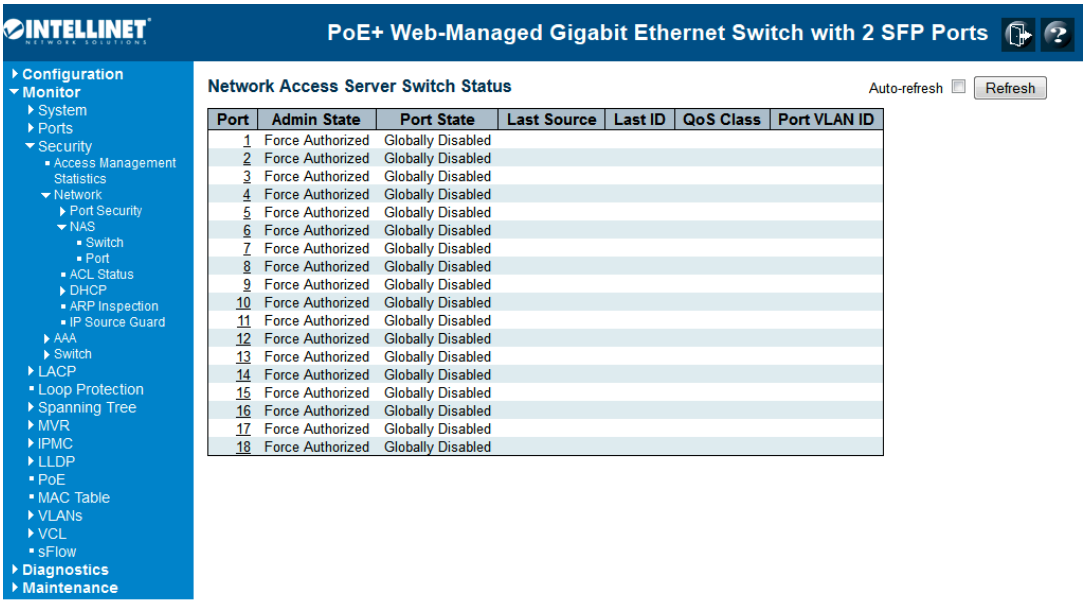

Port

The switch port number. Click to navigate to detailed NAS statistics for this port.

Admin State

The port's current administrative state. Refer to NAS Admin State for a description of possible values.

Port State

The current state of the port. Refer to NAS Port State for a description of the individual states.

Last Source

The source MAC address carried in the most recently received EAPOL frame for EAPOL-based authentication, and the most recently received frame from a new client for MAC-based authentication.

Last ID

The user name (supplicant identity) carried in the most recently received Response Identity EAPOL frame for EAPOL-based authentication, and the source MAC address from the most recently received frame from a new client for MAC-based authentication.

QoS Class

QoS Class assigned to the port by the RADIUS server if enabled.

Port VLAN ID

The VLAN ID that NAS has put the port in. The field is blank if the Port VLAN ID is not overridden by NAS.
If the VLAN ID is assigned by the RADIUS server, "(RADIUS-assigned)" is appended to the VLAN ID.

If the port is moved to the Guest VLAN, "(Guest)" is appended to the VLAN ID. Read more about Guest VLANs here.

Buttons

Refresh: Click to refresh the page immediately.
Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Port State

Admin State

The port's current administrative state. Refer to NAS Admin State for a description of possible values.

Port State

The current state of the port. Refer to NAS Port state for a description of the individual states.

QoS Class

The QoS class assigned by the RADIUS server. The field is blank if no QoS class is assigned.

Port VLAN ID

The VLAN ID that NAS has put the port in. The field is blank, if the Port VLAN ID is not overridden by NAS.
If the VLAN ID is assigned by the RADIUS server, "(RADIUS-assigned)" is appended to the VLAN ID.

If the port is moved to the Guest VLAN, "(Guest)" is appended to the VLAN ID. Read more about Guest VLANs here.

Port Counters

EAPOL Counters

These supplicant frame counters are available for the following administrative states:

• Force Authorized

• Force Unauthorized

• Port-based 802.1X

• Single 802.1X

• Multi 802.1X

EAPOL Counters			
Direction	**Name**	**IEEE Name**	**Description**
Rx	**Total**	dot1xAuthEapolFramesRx	The number of valid EAPOL frames of any type that have been received by the switch.
Rx	**Response ID**	dot1xAuthEapolRespIdFramesRx	The number of valid EAPOL Response Identity frames that have been received by the switch.
Rx	**Responses**	dot1xAuthEapolRespFramesRx	The number of valid EAPOL response frames (other than Response Identity frames) that have been received by the switch.
Rx	**Start**	dot1xAuthEapolStartFramesRx	The number of EAPOL Start frames that have been received by the switch.
Rx	**Logoff**	dot1xAuthEapolLogoffFramesRx	The number of valid EAPOL Logoff frames that have been received by the switch.
Rx	**Invalid Type**	dot1xAuthInvalidEapolFramesRx	The number of EAPOL frames that have been received by the switch in which the frame type is not recognized.
Rx	**Invalid Length**	dot1xAuthEapLengthErrorFramesRx	The number of EAPOL frames that have been received by the switch in which the Packet Body Length field is invalid.
Tx	**Total**	dot1xAuthEapolFramesTx	The number of EAPOL frames of any type that have been transmitted

			by the switch.
Tx	**Request ID**	dot1xAuthEapolReqIdFramesTx	The number of EAPOL Request Identity frames that have been transmitted by the switch.
Tx	**Requests**	dot1xAuthEapolReqFramesTx	The number of valid EAPOL Request frames (other than Request Identity frames) that have been transmitted by the switch.

Backend Server Counters

These backend (RADIUS) frame counters are available for the following administrative states:

• Port-based 802.1X

• Single 802.1X

• Multi 802.1X

• MAC-based Auth.

Backend Server Counters			
Direction	**Name**	**IEEE Name**	**Description**
Rx	**Access Challenges**	dot1xAuthBackendAccessChallenges	**802.1X-based**: Counts the number of times that the switch receives the first request from the backend server following the first response from the supplicant. Indicates that the backend server has communication with the switch. **MAC-based**: Counts all Access Challenges received from the backend server for this port (left-most table) or

			client (right-most table).
Rx	**Other Requests**	dot1xAuthBackendOtherRequestsToSupplicant	**802.1X-based**: Counts the number of times that the switch sends an EAP Request packet following the first to the supplicant. Indicates that the backend server chose an EAP-method. **MAC-based**: Not applicable.
Rx	**Auth. Successes**	dot1xAuthBackendAuthSuccesses	**802.1X- and MAC-based**: Counts the number of times that the switch receives a success indication. Indicates that the supplicant/ client has successfully authenticated to the backend server.
Rx	**Auth. Failures**	dot1xAuthBackendAuthFails	**802.1X- and MAC-based**: Counts the number of times that the switch receives a failure message. This indicates that the supplicant/client has not authenticated to the backend server.
Tx	**Responses**	dot1xAuthBackendResponses	**802.1X-based:** Counts the number of times that the switch attempts to send a

		supplicant's first response packet to the backend server. Indicates the switch attempted communication with the backend server. Possible retransmissions are not counted. **MAC-based:** Counts all the backend server packets sent from the switch towards the backend server for a given port (left-most table) or client (right-most table). Possible retransmissions are not counted.

Last Supplicant/Client Info

Information about the last supplicant/client that attempted to authenticate. This information is available for the following administrative states:

• Port-based 802.1X

• Single 802.1X

• Multi 802.1X

• MAC-based Auth.

Last Supplicant/Client Info		
Name	**IEEE Name**	**Description**
MAC Address	dot1xAuthLastEapolFrameSource	The MAC address of the last supplicant/client.
VLAN ID	-	The VLAN ID on which the last frame from the last supplicant/client was received.

Version	dot1xAuthLastEapolFrameVersion	**802.1X-based**: The protocol version number carried in the most recently received EAPOL frame. **MAC-based**: Not applicable.
Identity	-	**802.1X-based**: The user name (supplicant identity) carried in the most recently received Response Identity EAPOL frame. **MAC-based**: Not applicable.

Selected Counters

Selected Counters

The Selected Counters table is visible when the port is in one of the following administrative states:

• Multi 802.1X

• MAC-based Auth.

The table is identical to and is placed next to the Port Counters table, and will be empty if no MAC address is currently selected. To populate the table, select one of the attached MAC Addresses from the table below.

Attached MAC Addresses

Identity

Shows the identity of the supplicant, as received in the Response Identity EAPOL frame.
Clicking the link causes the supplicant's EAPOL and Backend Server counters to be shown in the Selected Counters table. If no supplicants are attached, it shows *No supplicants attached*.
This column is not available for MAC-based Auth.

MAC Address

For Multi 802.1X, this column holds the MAC address of the attached supplicant.
For MAC-based Auth., this column holds the MAC address of the attached client.
Clicking the link causes the client's Backend Server counters to be shown in the Selected Counters table. If no clients are attached, it shows *No clients attached*.

VLAN ID

This column holds the VLAN ID that the corresponding client is currently secured through the Port

Security module.

State

The client can either be authenticated or unauthenticated. In the authenticated state, it is allowed to forward frames on the port, and in the unauthenticated state, it is blocked. As long as the backend server hasn't successfully authenticated the client, it is unauthenticated. If an authentication fails for one or the other reason, the client will remain in the unauthenticated state for Hold Time seconds.

Last Authentication

Shows the date and time of the last authentication of the client (successful as well as unsuccessful).

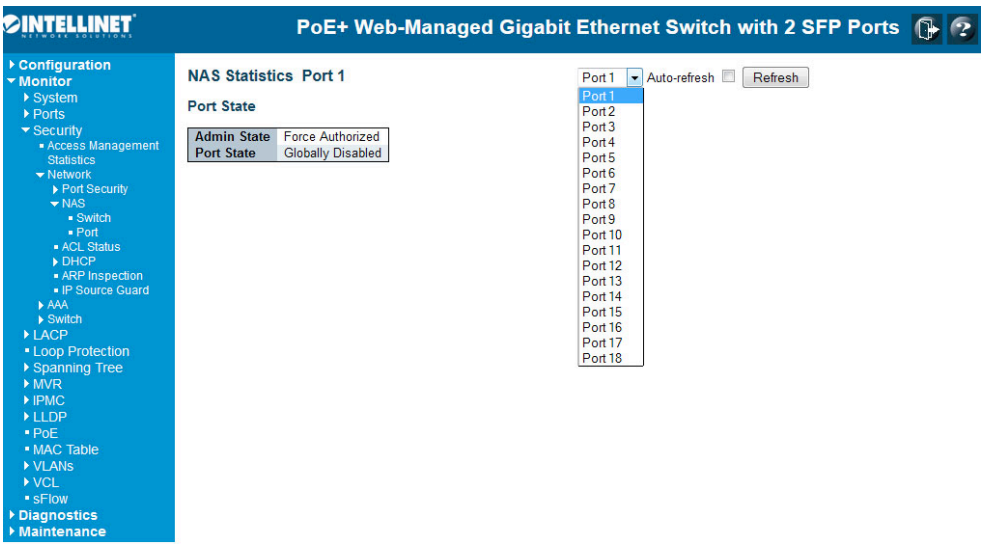

Buttons

The port select box determines which port is affected when clicking the buttons.

Auto-refresh

Check this box to enable an automatic refresh of the page at regular intervals.

Click to refresh the page immediately.

This button is available in the following modes:

• Force Authorized

• Force Unauthorized

• Port-based 802.1X

• Single 802.1X

Click to clear the counters for the selected port.

This button is available in the following modes:

• Multi 802.1X

• MAC-based Auth.X

Click to clear both the port counters and all of the attached client's counters. The "Last Client" will not be cleared, however.

This button is available in the following modes:

• Multi 802.1X

• MAC-based Auth.X

Click to clear only the currently selected client's counters.

Network / ACL Status

This page shows the ACL status by different ACL users. Each row describes the ACE that is defined. It is a conflict if a specific ACE is not applied to the hardware due to hardware limitations. The maximum number of ACEs is **256** on each switch.

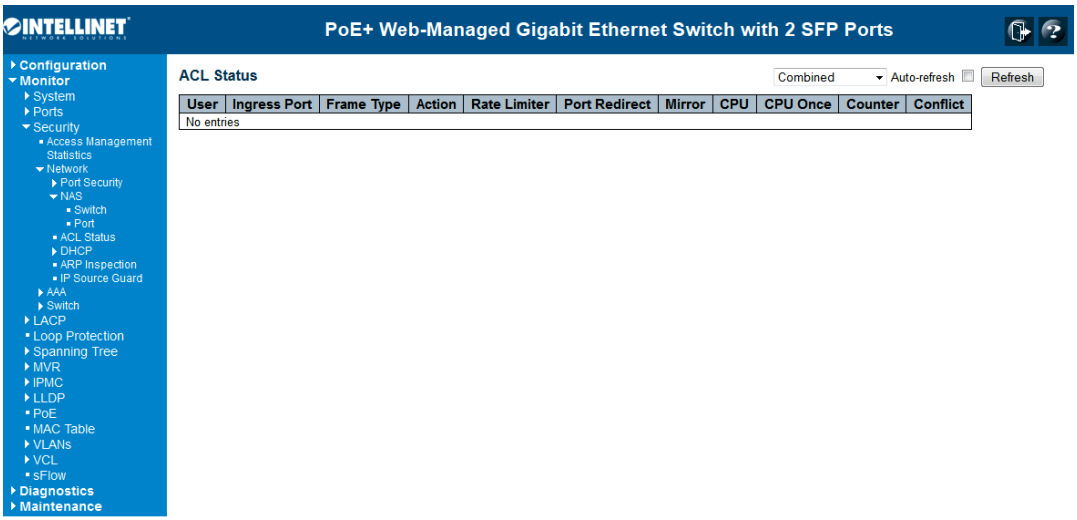

User

Indicates the ACL user.

Ingress Port

Indicates the ingress port of the ACE. Possible values:

All: The ACE will match all ingress port.

Port: The ACE will match a specific ingress port.

Frame Type

Indicates the frame type of the ACE. Possible values:

Any: The ACE will match any frame type.

EType: The ACE will match Ethernet Type frames. Note that an Ethernet Type based ACE will not get matched by IP and ARP frames.

ARP: The ACE will match ARP/RARP frames.

IPv4: The ACE will match all IPv4 frames.

IPv4/ICMP: The ACE will match IPv4 frames with ICMP protocol.

IPv4/UDP: The ACE will match IPv4 frames with UDP protocol.

IPv4/TCP: The ACE will match IPv4 frames with TCP protocol.

IPv4/Other: The ACE will match IPv4 frames, which are not ICMP/UDP/TCP.

IPv6: The ACE will match all IPv6 standard frames.

Action

Indicates the forwarding action of the ACE.

Permit: Frames matching the ACE may be forwarded and learned.

Deny: Frames matching the ACE are dropped.

Rate Limiter

Indicates the rate limiter number of the ACE. The allowed range is 1 to 16. When Disabled is displayed, the rate limiter operation is disabled.

Port Copy

Indicates the port copy operation of the ACE. Frames matching the ACE are copied to the port number. The allowed values are Disabled or a specific port number. When Disabled is displayed, the port copy operation is disabled.

Mirror

Specify the mirror operation of this port. The allowed values:

Enabled: Frames received on the port are mirrored.

Disabled: Frames received on the port are not mirrored.

The default value is "Disabled."

CPU

Forward packet that matched the specific ACE to CPU.

CPU Once

Forward first packet that matched the specific ACE to CPU.

Counter

The counter indicates the number of times the ACE was hit by a frame.

Conflict

Indicates the hardware status of the specific ACE. The specific ACE is not applied to the hardware due to hardware limitations.

Buttons

: Select the ACL status from this drop-down list.

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

DHCP Snooping Statistics

This page provides statistics for DHCP snooping. The statistics show only packet counters when DHCP snooping mode is enabled and relay mode is disabled. And it doesn't count the DHCP packets for DHCP client.

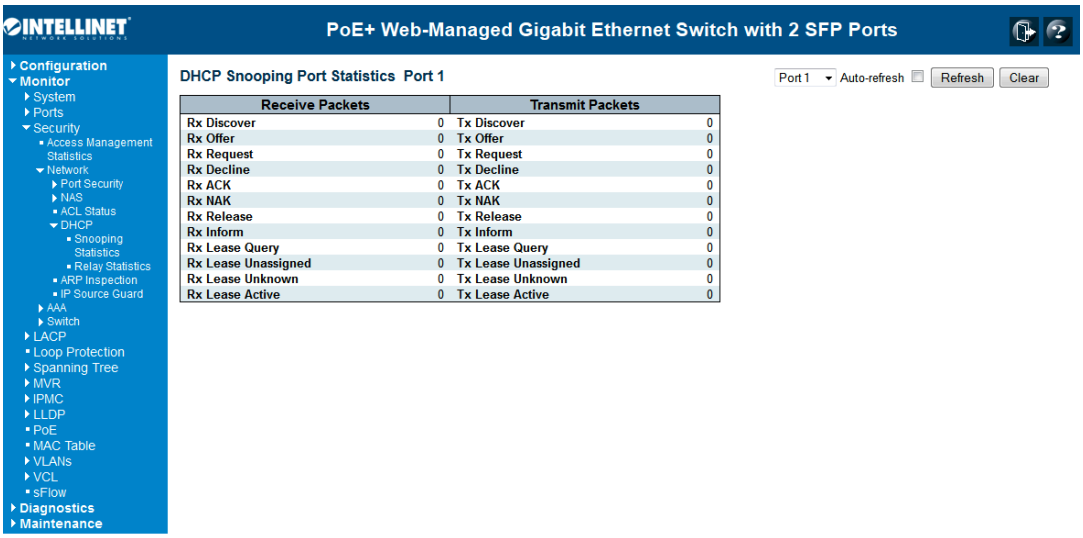

Receive and Transmit Packets

Rx and Tx Discover

The number of discover (option 53 with value 1) packets received and transmitted.

Rx and Tx Offer

The number of offer (option 53 with value 2) packets received and transmitted.

Rx and Tx Request

The number of request (option 53 with value 3) packets received and transmitted.

Rx and Tx Decline

The number of decline (option 53 with value 4) packets received and transmitted.

Rx and Tx ACK

The number of ACK (option 53 with value 5) packets received and transmitted.

Rx and Tx NAK

The number of NAK (option 53 with value 6) packets received and transmitted.

Rx and Tx Release

The number of release (option 53 with value 7) packets received and transmitted.

Rx and Tx Inform

The number of inform (option 53 with value 8) packets received and transmitted.

Rx and Tx Lease Query

The number of lease query (option 53 with value 10) packets received and transmitted.

Rx and Tx Lease Unassigned

The number of lease unassigned (option 53 with value 11) packets received and transmitted.

Rx and Tx Lease Unknown

The number of lease unknown (option 53 with value 12) packets received and transmitted.

Rx and Tx Lease Active

The number of lease active (option 53 with value 13) packets received and transmitted.

Buttons

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

Clear: Clears the counters for the selected port.

DHCP Relay Statistics

This page provides statistics for DHCP relay.

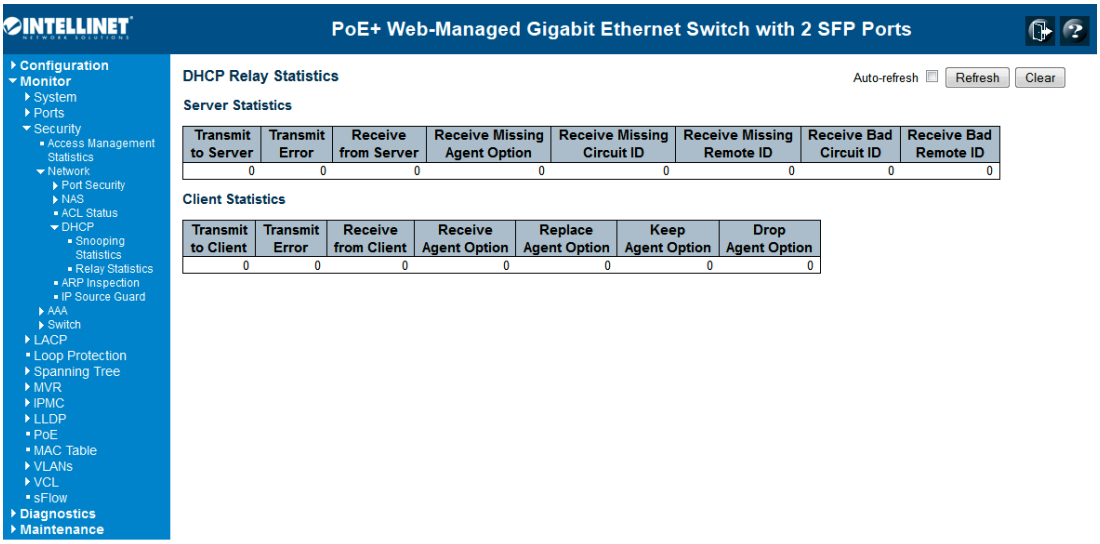

Server Statistics

Transmit to Server

The number of packets that are relayed from client to server.

Transmit Error

The number of packets that resulted in errors while being sent to clients.

Receive from Server

The number of packets received from server.

Receive Missing Agent Option

The number of packets received without agent information options.

Receive Missing Circuit ID

The number of packets received with the Circuit ID option missing.

Receive Missing Remote ID

The number of packets received with the Remote ID option missing.

Receive Bad Circuit ID

The number of packets whose Circuit ID option did not match a known circuit ID.

Receive Bad Remote ID

The number of packets whose Remote ID option did not match a known Remote ID.

Client Statistics

Transmit to Client

The number of relayed packets from server to client.

Transmit Error

The number of packets that resulted in an error while being sent to servers.

Receive from Client

The number of received packets from server.

Receive Agent Option

The number of received packets with relay agent information option.

Replace Agent Option

The number of packets which were replaced with relay agent information option.

Keep Agent Option

The number of packets whose relay agent information was retained.

Drop Agent Option

The number of packets that were dropped which were received with relay agent information.

Buttons

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

Clear: Clears statistics.

Network / Dynamic ARP Inspection Table

Entries in the Dynamic ARP Inspection Table are shown on this page. The Dynamic ARP Inspection Table contains up to 1024 entries, and is sorted first by port, then by VLAN ID, then by MAC address, and then by IP address.

Navigating the ARP Inspection Table

Each page shows up to 99 entries from the Dynamic ARP Inspection table, the default being 20, selected through the "entries per page" input field. When first visited, the Web page will show the first

20 entries from the beginning of the Dynamic ARP Inspection Table.
The "Start from port address," "VLAN," "MAC address" and "IP address" input fields allow the user to select the starting point in the Dynamic ARP Inspection Table. Clicking the button will update the displayed table starting from that or the closest next Dynamic ARP Inspection Table match. In addition, the two input fields will — upon a button click — assume the value of the first displayed entry, allowing for continuous refresh with the same start address.
The last entry of the currently displayed table is used as a basis for the next lookup. When the end is reached, "No more entries" is shown in the displayed table. Use the button to start over.

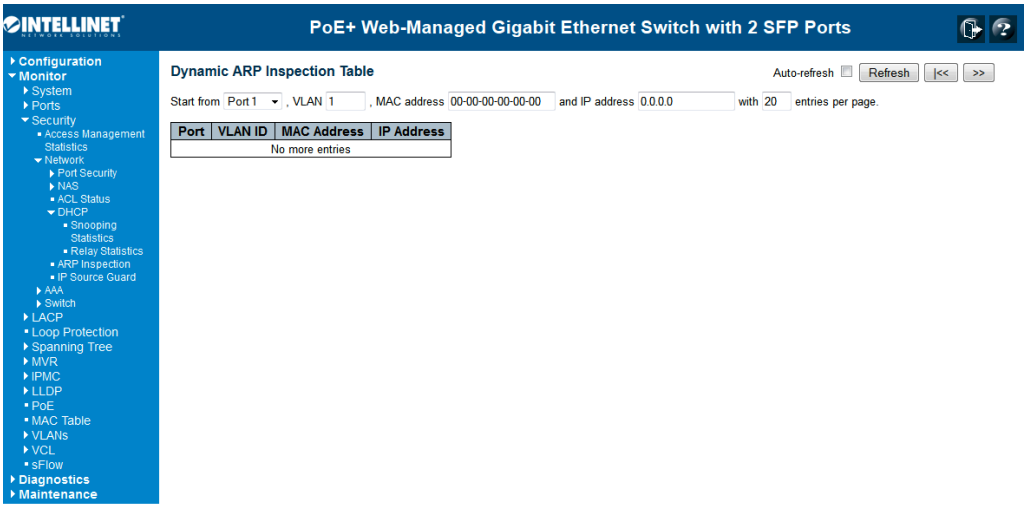

ARP Inspection Table Columns

Port

Switch Port Number for which the entries are displayed.

VLAN ID

VLAN ID in which the ARP traffic is permitted.

MAC Address

User MAC address of the entry.

IP Address

User IP address of the entry.

Buttons

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

Clear: Flushes all dynamic entries.

/<< : Updates the table starting from the first entry in the Dynamic ARP Inspection Tables.

>> : Updates the table, starting with the entry after the last entry currently displayed.

Network / Dynamic IP Source Guard Table

Entries in the Dynamic IP Source Guard Table are shown on this page. The Dynamic IP Source Guard Table is sorted first by port, then by VLAN ID, then by IP address, and then by MAC address.

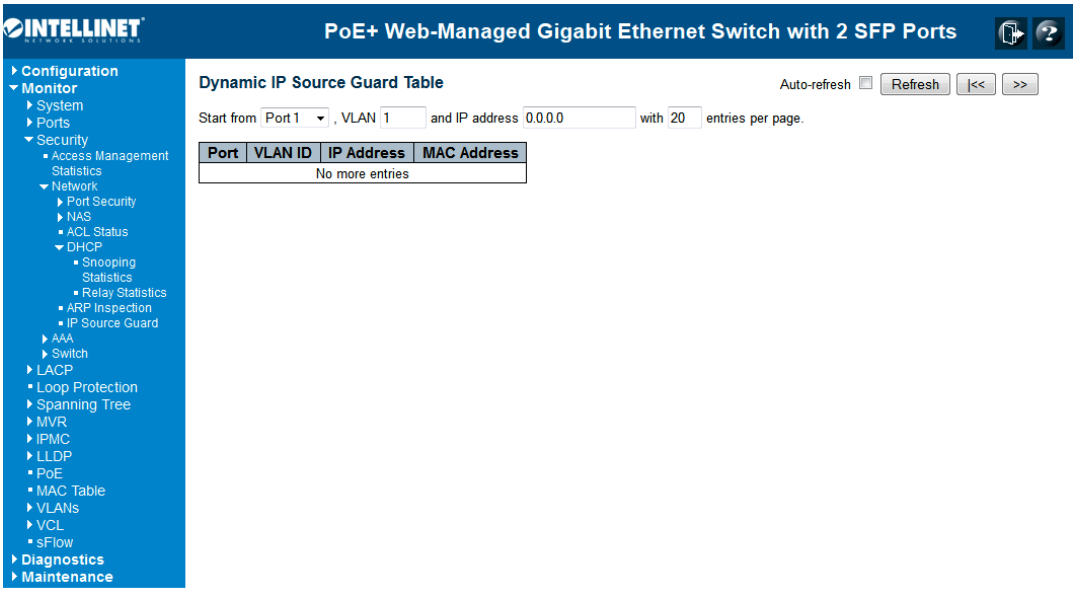

Navigating the IP Source Guard Table

Each page shows up to 99 entries from the Dynamic IP Source Guard table, default being 20, selected through the "entries per page" input field. When first visited, the Web page will show the first 20 entries from the beginning of the Dynamic IP Source Guard Table.
The "Start from port address," "VLAN" and "IP address" input fields allow the user to select the starting point in the Dynamic IP Source Guard Table. Clicking the button will update the displayed table starting from that or the closest next Dynamic IP Source Guard Table match. In addition, the two input fields will — upon a button click — assume the value of the first displayed entry, allowing for continuous refresh with the same start address.
The will use the last entry of the currently displayed table as a basis for the next lookup. When the end is reached, "No more entries" is shown in the displayed table. Use the button to start over.

IP Source Guard Table Columns

Port

Switch Port Number for which the entries are displayed.

VLAN ID

VLAN ID in which the IP traffic is permitted.

IP Address

User IP address of the entry.

MAC Address

Source MAC address.

Buttons

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

Clear: Flushes all dynamic entries.

/<<: Updates the table starting from the first entry in the Dynamic IP Source Guard Tables.

>>: Updates the table, starting with the entry after the last entry currently displayed.

6.1.3.3 Security / AAA

This page provides an overview of the status of the RADIUS servers configurable on the Authentication configuration page.

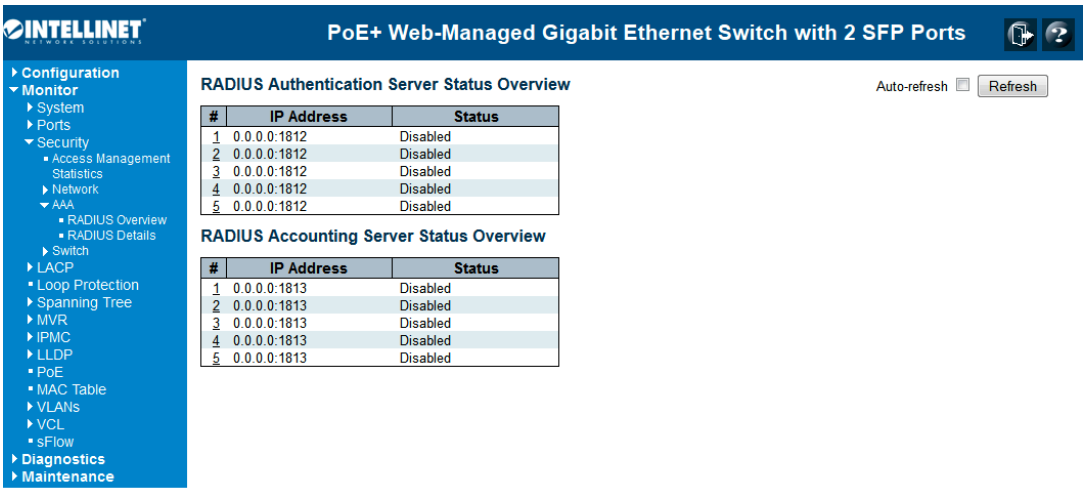

RADIUS Authentication Servers

#

The RADIUS server number. Click to navigate to detailed statistics for this server.

IP Address

The IP address and UDP port number (in <IP Address>:<UDP Port> notation) of this server.

State

The current state of the server. This field takes one of the following values:

Disabled: The server is disabled.

Not Ready: The server is enabled, but IP communication is not yet up and running.

Ready: The server is enabled, IP communication is up and running, and the RADIUS module is ready

to accept access attempts.

Dead (X seconds left): Access attempts were made to this server, but it did not reply within the configured timeout. The server has temporarily been disabled, but will get re-enabled when the dead-time expires. The number of seconds left before this occurs is displayed in parentheses. This state is only reachable when more than one server is enabled.

RADIUS Accounting Servers

#

The RADIUS server number. Click to navigate to detailed statistics for this server.

IP Address

The IP address and UDP port number (in <IP Address>:<UDP Port> notation) of this server.

State

The current state of the server. This field takes one of the following values:

Disabled: The server is disabled

Not Ready: The server is enabled, but IP communication is not yet up and running.

Ready: The server is enabled, IP communication is up and running, and the RADIUS module is ready to accept accounting attempts.

Dead (X seconds left): Accounting attempts were made to this server, but it did not reply within the configured timeout. The server has temporarily been disabled, but will get re-enabled when the dead-time expires. The number of seconds left before this occurs is displayed in parentheses. This state is only reachable when more than one server is enabled.

Buttons

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

RADIUS Authentication Statistics

This page provides detailed statistics for a particular RADIUS server.

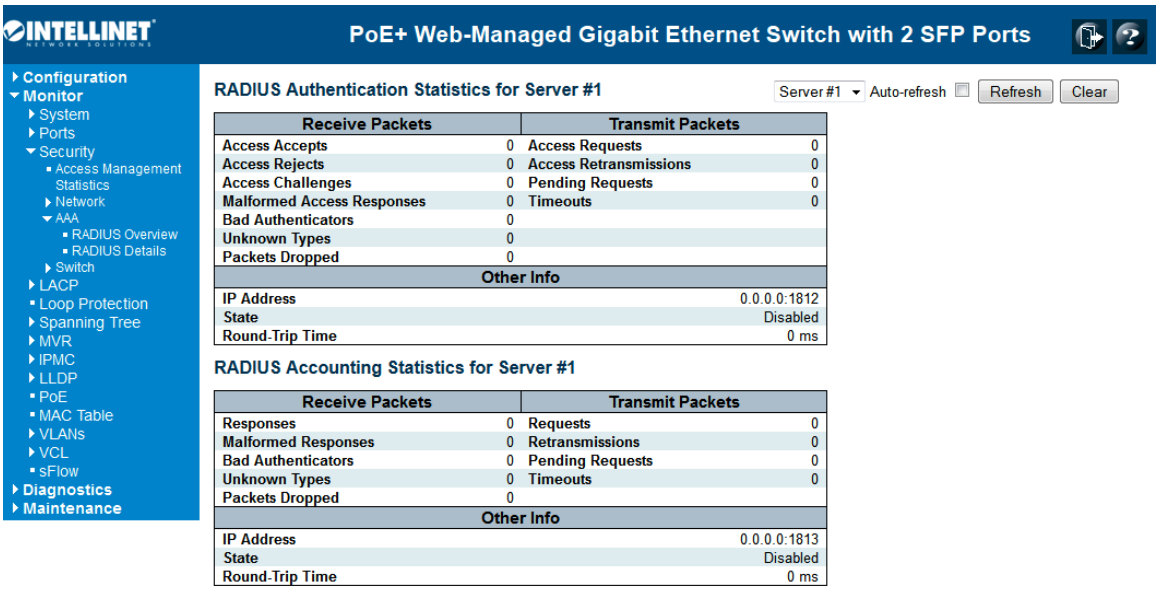

RADIUS Authentication Statistics

The statistics map closely to those specified in RFC4668-RADIUS.Authentication Client MIB.

Use the server select box to switch between the backend servers to show details.

Packet Counters

RADIUS authentication server packet counter. There are seven receive and four transmit counters.

Direction	Name	RFC4668 Name	Description
Rx	**Access Accepts**	radiusAuthClientExtAccessAccepts	The number of RADIUS Access-Accept packets (valid or invalid) received from the server.
Rx	**Access Rejects**	radiusAuthClientExtAccessRejects	The number of RADIUS Access-Reject packets (valid or invalid) received from the server.
Rx	**Access Challenges**	radiusAuthClientExtAccessChallenges	The number of RADIUS Access-Challenge packets (valid or invalid) received from the server.
Rx	**Malformed Access Responses**	radiusAuthClientExtMalformedAccessResponses	The number of malformed RADIUS Access-Response packets received from the server. Malformed packets include packets with an invalid length. Bad

			authenticators or Message Authenticator attributes or unknown types are not included as malformed access responses.
Rx	**Bad Authenticators**	radiusAuthClientExtBadAuthenticators	The number of RADIUS Access-Response packets containing invalid authenticators or Message Authenticator attributes received from the server.
Rx	**Unknown Types**	radiusAuthClientExtUnknownTypes	The number of RADIUS packets that were received with unknown types from the server on the authentication port and dropped.
Rx	**Packets Dropped**	Radius Auth Client Ext-Packets Dropped	The number of RADIUS packets that were received from the server on the authentication port and dropped for some other reason.
Tx	**Access Requests**	Radius AuthClientExtAccess Requests	The number of RADIUS Access-Request packets sent to the server. This does not include retransmissions.
Tx	**Access Retransmissions**	radiusAuthClientExtAccessRetransmissions	The number of RADIUS Access-Request packets retransmitted to the RADIUS authentication server.
Tx	**Pending Requests**	radiusAuthClientExtPendingRequests	The number of RADIUS Access-Request packets destined for the server that have not yet timed out or received a response. This variable is incremented when an Access-Request is sent and decremented due to receipt of an Access-Accept, Access-Reject, Access-Challenge, timeout or retransmission.
Tx	**Timeouts**	radiusAuthClientExtTimeouts	The number of authentication timeouts to the server. After a timeout, the client may retry to the same server, send to a different server, or give up. A retry to the same server is counted as a retransmit as well as a timeout. A send to a different server is counted as a Request as well as a timeout.

Other Info

This section contains information about the state of the server and the latest round-trip time.

Name	RFC4668 Name	Description
State	-	Shows the state of the server. It takes one of the following values: **Disabled:** The selected server is disabled. **Not Ready:** The server is enabled, but IP communication is not yet up and running. **Ready:** The server is enabled, IP communication is up and running, and the RADIUS module is ready to accept access attempts. **`Dead (X seconds left)`**: Access attempts were made to this server, but it did not reply within the configured timeout. The server has temporarily been disabled, but will get re-enabled when the dead-time expires. The number of seconds left before this occurs is displayed in parentheses. This state is only reachable when more than one server is enabled.
Round-Trip Time	Radius AuthClientExtRoundTrip Time	The time interval (measured in milliseconds) between the most recent Access-Reply/Access-Challenge and the Access-Request that matched it from the RADIUS authentication server. The granularity of this measurement is 100 ms. A value of 0 ms indicates that there hasn't been round-trip communication with the server yet.

RADIUS Accounting Statistics

The statistics map closely to those specified in RFC4670-RADIUS.Accounting Client MIB.
Use the server select box to switch between the backend servers to show details.

Packet Counters

RADIUS accounting server packet counter. There are five receive and four transmit counters.

Direction	Name	RFC4670 Name	Description
Rx	**Responses**	radiusAccClientExtResponses	The number of RADIUS packets (valid or invalid) received from the server.
Rx	**Malformed Responses**	radiusAccClientExtMalformedResponses	The number of malformed RADIUS packets received from the server. Malformed packets include packets with an invalid length. Bad authenticators or unknown types are not included as malformed access responses.
Rx	**Bad Authenticators**	radiusAcctClientExtBadAuthenticators	The number of RADIUS packets containing invalid authenticators received from the

			server.
Rx	**Unknown Types**	radiusAccClientExtUnknownTypes	The number of RADIUS packets of unknown types that were received from the server on the accounting port.
Rx	**Packets Dropped**	radiusAccClientExtPacketsDropped	The number of RADIUS packets that were received from the server on the accounting port and dropped for some other reason.
Tx	**Requests**	radiusAccClientExtRequests	The number of RADIUS packets sent to the server. This does not include retransmissions.
Tx	**Retransmissions**	radiusAccClientExtRetransmissions	The number of RADIUS packets retransmitted to the RADIUS accounting server.
Tx	**Pending Requests**	radiusAccClientExtPendingRequests	The number of RADIUS packets destined for the server that have not yet timed out or received a response. This variable is incremented when a Request is sent and decremented due to receipt of a Response, timeout, or retransmission.
Tx	**Timeouts**	radiusAccClientExtTimeouts	The number of accounting timeouts to the server. After a timeout, the client may retry to the same server, send to a different server, or give up. A retry to the same server is counted as a retransmit as well as a timeout. A send to a different server is counted as a Request as well as a timeout.

Other Info

This section contains information about the state of the server and the latest round-trip time.

Name	RFC4670 Name	Description
State	-	Shows the state of the server. It takes one of the following values: **Not Ready:** **`Disabled`**: The selected server is disabled. **Not Ready:** The server is enabled, but IP communication is not yet up and running. **aReady:** The server is enabled, IP communication is up and running, and the RADIUS module is ready to accept accounting

		attempts. **`Dead (X seconds left)`**: Accounting attempts were made to this server, but it did not reply within the configured timeout. The server has temporarily been disabled, but will get re-enabled when the dead-time expires. The number of seconds left before this occurs is displayed in parentheses. This state is only reachable when more than one server is enabled.
Round-Trip Time	radiusAccClientExtRoundTripTime	The time interval (measured in milliseconds) between the most recent Response and the Request that matched it from the RADIUS accounting server. The granularity of this measurement is 100 ms. A value of 0 ms indicates that there hasn't been round-trip communication with the server yet.

Buttons

The server select box determines which server is affected by clicking the buttons.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

Clear: Clears the counters for the selected server. The “Pending Requests” counter will not be cleared by this operation.

6.1.3.4 Switch / SNMP / RMON

RMON Statistics Overview

This page provides an overview of RMON statistics entries.

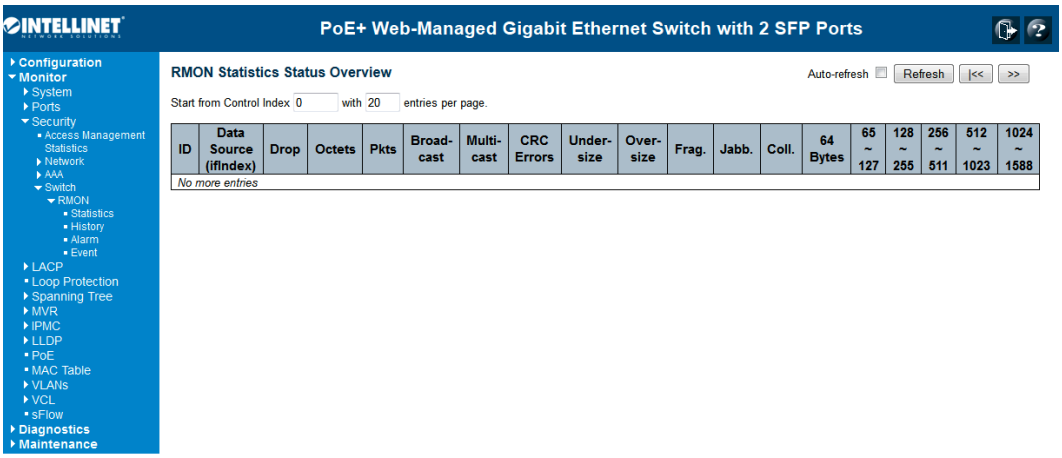

The displayed counters:

Data Source

The port ID which wants to be monitored.

Drop

The total number of events in which packets were dropped by the probe due to lack of resources.

Octets

The total number of octets of data (including those in bad packets) received on the network.

Pkts

The total number of packets (including bad packets, broadcast packets and multicast packets) received.

Broad-cast

The total number of good packets received that were directed to the broadcast address.

Multi-cast

The total number of good packets received that were directed to a multicast address.

CRC Errors

The total number of packets received that had a length (excluding framing bits, but including FCS

octets) of between 64 and 1518 octets.

Under-size

The total number of packets received that were less than 64 octets.

Over-size

The total number of packets received that were longer than 1518 octets.

Frag.

The number of frames whose size is less than 64 octets received with invalid CRC.

Jabb.

The number of frames whose size is larger than 64 octets received with invalid CRC.

Coll.

The best estimate of the total number of collisions on this Ethernet segment.

64

The total number of packets (including bad packets) received that were 64 octets in length.

65~127

The total number of packets (including bad packets) received that were 65 to 127 octets in length.

128~255

The total number of packets (including bad packets) received that were 128 to 255 octets in length.

256~511

The total number of packets (including bad packets) received that were 256 to 511 octets in length.

512~1023

The total number of packets (including bad packets) received that were 512 to 1023 octets in length.

1024~1588

The total number of packets (including bad packets) received that were 1024 to 1588 octets in length.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh : Click this box to enable an automatic refresh of the page at regular intervals.

RMON History Overview

This page provides an overview of RMON history entries.

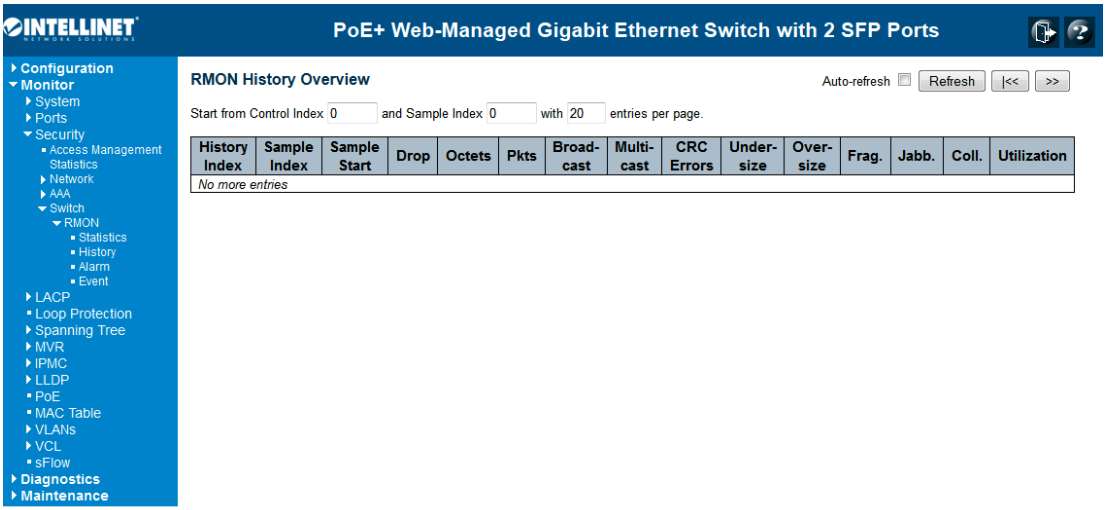

The displayed fields:

History Index

Indicates the index of History control entry.

Sample Index

Indicates the index of the data entry associated with the control entry.

Sample Start

The total number of events in which packets were dropped by the probe due to lack of resources.

Drops

The total number of events in which packets were dropped by the probe due to lack of resources.

Octets

The total number of octets of data (including those in bad packets) received on the network.

Pkts

The total number of packets (including bad packets, broadcast packets and multicast packets) received.

Broadcast

The total number of good packets received that were directed to the broadcast address.

Multicast

The total number of good packets received that were directed to a multicast address.

CRCErrors

The total number of packets received that had a length (excluding framing bits, but including FCS octets) of between 64 and 1518 octets.

Undersize

The total number of packets received that were less than 64 octets.

Oversize

The total number of packets received that were longer than 1518 octets.

Frag.

The number of frames which size is less than 64 octets received with invalid CRC.

Jabb.

The number of frames which size is larger than 64 octets received with invalid CRC.

Coll.

The best estimate of the total number of collisions on this Ethernet segment.

Utilization

The best estimate of the mean physical layer network utilization on this interface during this sampling interval, in hundredths of a percent.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

RMON Alarm Overview

This page provides an overview of RMON alarm entries.

The displayed fields:

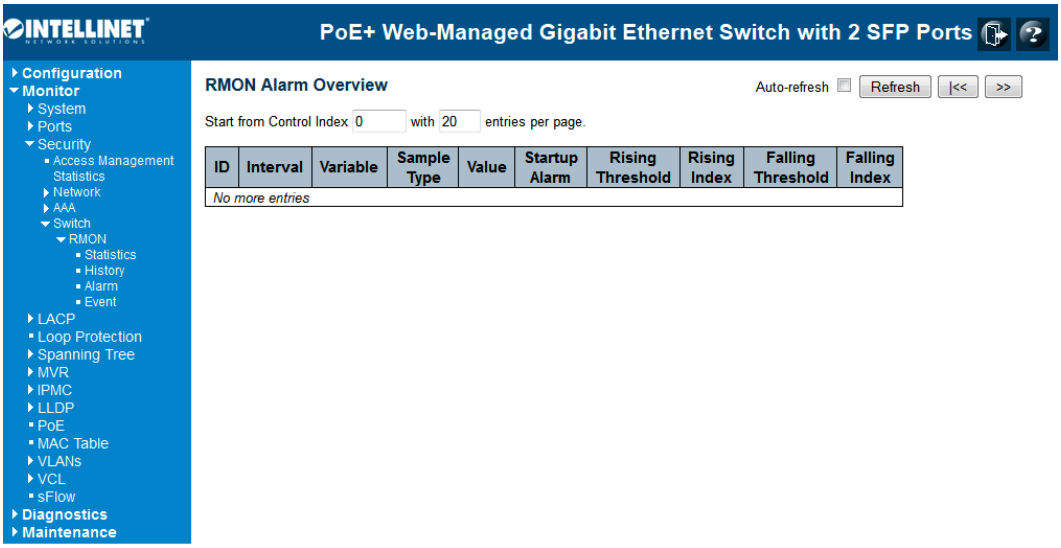

ID

Indicates the index of Alarm control entry.

Interval

Indicates the interval in seconds for sampling and comparing the rising and falling threshold.

Variable

Indicates the particular variable to be sampled.

Sample Type

The method of sampling the selected variable and calculating the value to be compared against the thresholds. Possible sample types:

Rising Threshold

Rising threshold value.

Rising Index

Rising event index.

Falling Threshold

Falling threshold value.

Falling Index

Falling event index.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

RMON Event Overview

This page provides an overview of RMON event entries.

The displayed fields:

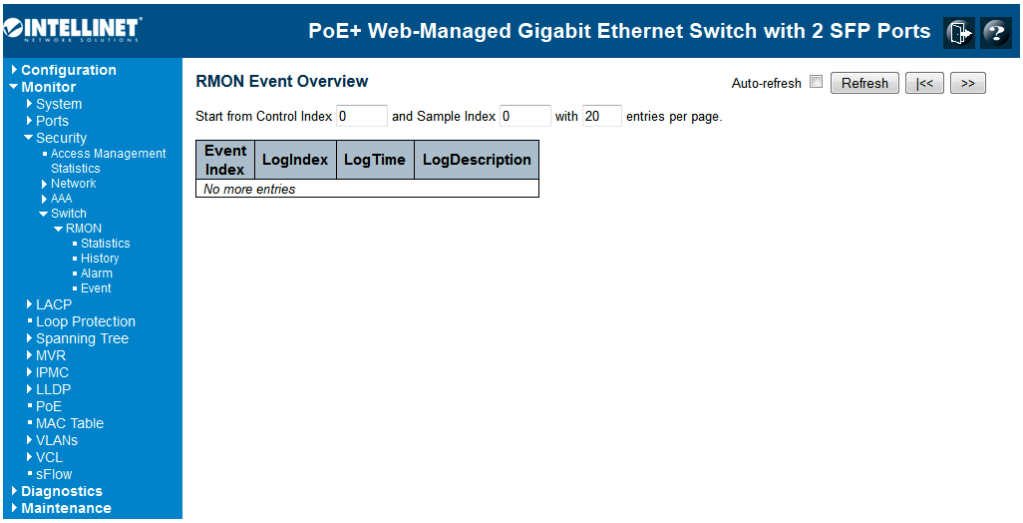

Event Index

Indicates the index of the event entry.

Log Index

Indicates the index of the log entry.

Log TIme

Indicates Event log time.

Log Description

Indicates the Event description.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

6.1.4 LACP System Status

6.1.4.1 System Status

This page provides a status overview for all LACP instances.

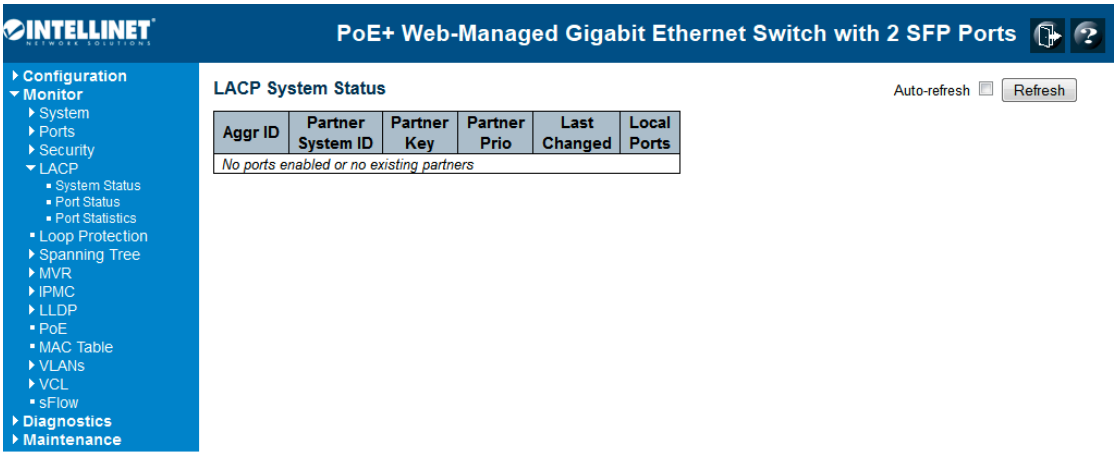

Aggr ID

The Aggregation ID associated with this aggregation instance. For LLAG, the ID is shown as "isid:aggr-id"; and for GLAGs as "aggr-id."

Partner System ID

The system ID (MAC address) of the aggregation partner.

Partner Key

The Key that the partner has assigned to this aggregation ID.

Last changed

The time since this aggregation changed.

Local Ports

Shows which ports are a part of this aggregation for this switch.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

6.1.4.2 LACP Port Status

This page provides a status overview for LACP status for all ports.

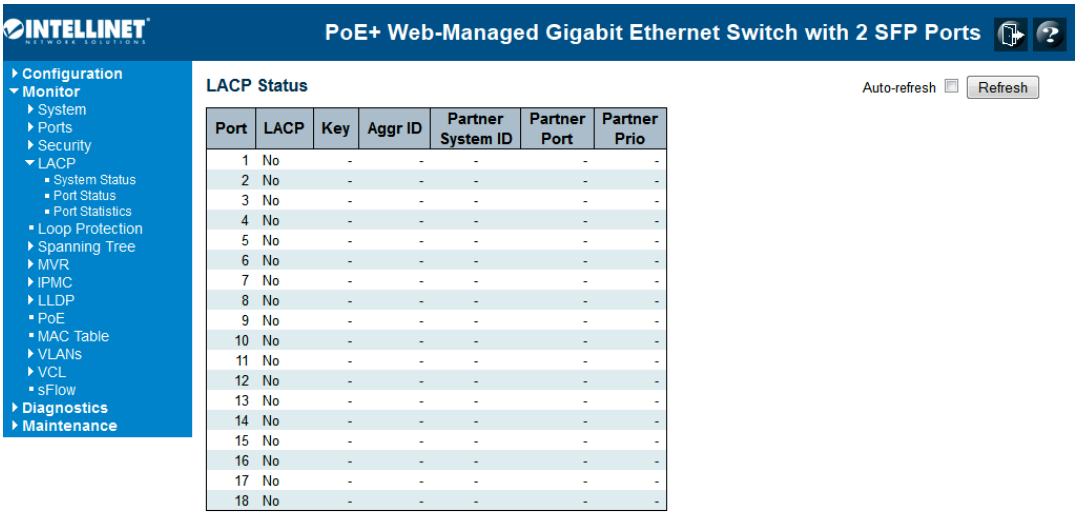

Port	LACP	Key	Aggr ID	Partner System ID	Partner Port	Partner Prio
1	No	-	-	-	-	-
2	No	-	-	-	-	-
3	No	-	-	-	-	-
4	No	-	-	-	-	-
5	No	-	-	-	-	-
6	No	-	-	-	-	-
7	No	-	-	-	-	-
8	No	-	-	-	-	-
9	No	-	-	-	-	-
10	No	-	-	-	-	-
11	No	-	-	-	-	-
12	No	-	-	-	-	-
13	No	-	-	-	-	-
14	No	-	-	-	-	-
15	No	-	-	-	-	-
16	No	-	-	-	-	-
17	No	-	-	-	-	-
18	No	-	-	-	-	-

Port

The switch port number.

LACP

“Yes” means that LACP is enabled and the port link is up. “No” means that LACP is not enabled or that the port link is down. “Backup” means that the port could not join the aggregation group, but will join if another port leaves the group. Meanwhile, its LACP status is disabled.

Key

The key assigned to this port. Only ports with the same key can aggregate together.

Aggr ID

The Aggregation ID assigned to this aggregation group.

Partner System ID

The partner's System ID (MAC address).

Partner Port

The partner's port number connected to this port.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

6.1.4.3 LACP statistics

This page provides an overview for LACP statistics for all ports.

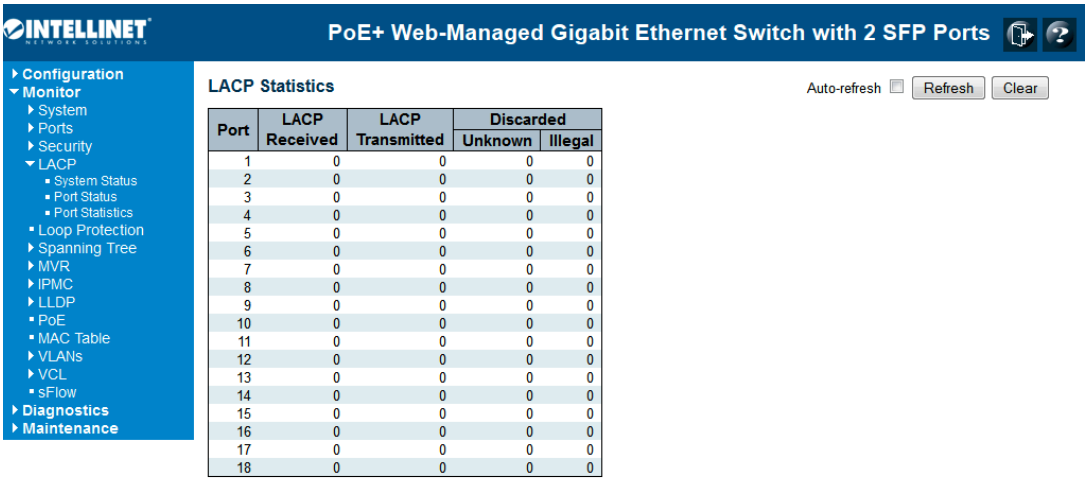

Port

The switch port number.

LACP Received

Shows how many LACP frames have been received at each port.

LACP Transmitted

Shows how many LACP frames have been sent from each port.

Discarded

Shows how many unknown or illegal LACP frames have been discarded at each port.

Buttons

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

Clear: Clears the counters for all ports.

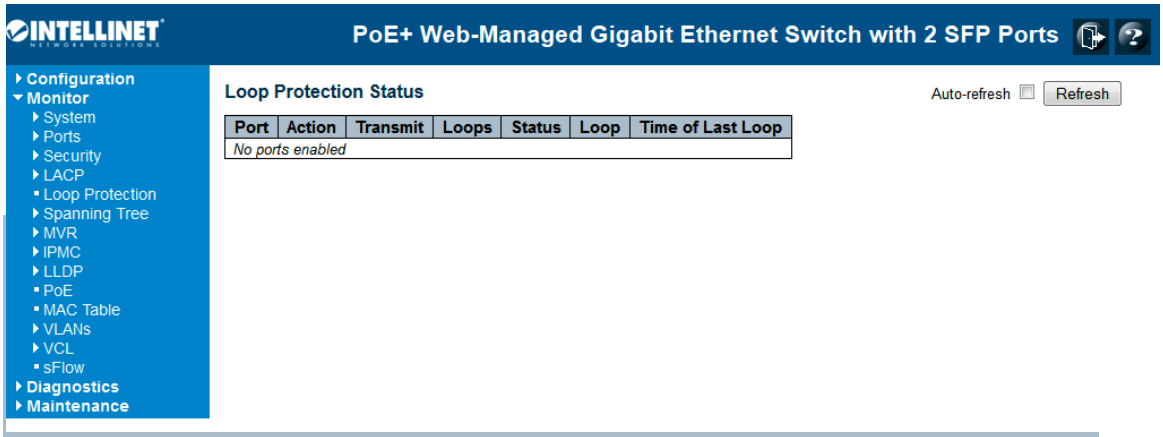

Port

The switch port number of the logical port.

Action

The currently configured port action.

Transmit

The currently configured port transmit mode.

Loops

The number of loops detected on this port.

Status

The current loop protection status of the port.

Loop

Whether a loop is currently detected on the port.

Time of Last Loop

The time of the last loop event detected.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

6.1.6 STP Bridge Status

This page provides a status overview of all STP bridge instances.

6.1.6.1 Bridge Status

The displayed table contains a row for each STP bridge instance, where the column displays the following information:

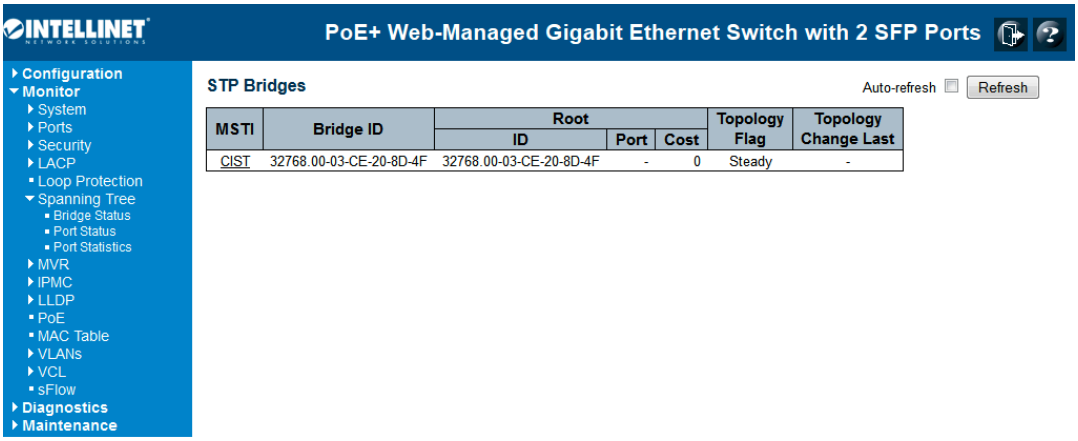

MSTI

The Bridge Instance. This is also a link to the STP Detailed Bridge Status

Bridge ID

The Bridge ID of this Bridge instance.

Root ID

The Bridge ID of the currently elected root bridge.

Root Port

The switch port currently assigned the root port role.

Root Cost

Root Path Cost. For the Root Bridge it is zero. For all other Bridges, it is the sum of the Port Path Costs on the least-cost path to the Root Bridge.

Topology Flag

The current state of the Topology Change Flag of this Bridge instance.

Topology Change Last

The time since last Topology Change occurred.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

6.1.6.2 STP Port Status

This page displays the STP CIST port status for physical ports of the switch.

STP port status:

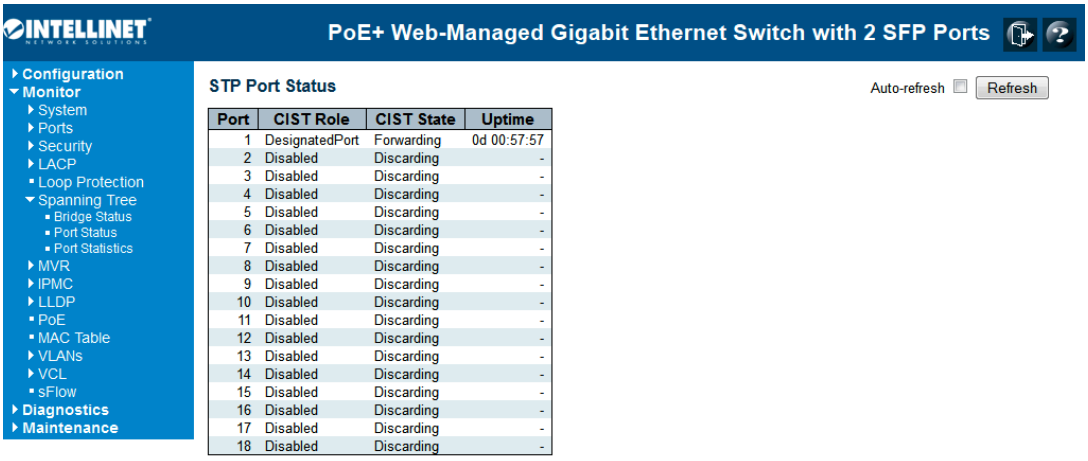

Port

The switch port number of the logical STP port.

CIST Role

The current STP port role of the CIST port. The port role can be one of the following values:

AlternatePort, BackupPort, RootPort, DesignatedPort, Disabled.

CIST State

The current STP port state of the CIST port. The port state can be one of the following values:

Discarding, Learning, Forwarding.

Uptime

The time since the bridge port was last initialized.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

6.1.6.3 STP Port Statistics

This page displays the STP port statistics counters of bridge ports in the switch.

The STP port statistics counters:

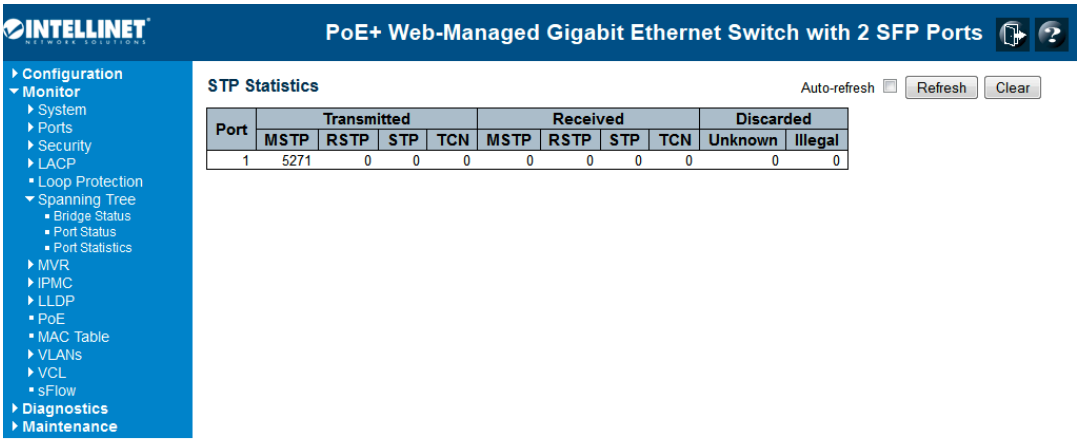

Port

The switch port number of the logical STP port.

MSTP

The number of MSTP Configuration BPDUs received/transmitted on the port.

RSTP

The number of RSTP Configuration BPDUs received/transmitted on the port.

STP

The number of legacy STP Configuration BPDUs received/transmitted on the port.

TCN

The number of (legacy) Topology Change Notification BPDUs received/transmitted on the port.

Discarded Unknown

The number of unknown Spanning Tree BPDUs received (and discarded) on the port.

Discarded Illegal

The number of illegal Spanning Tree BPDUs received (and discarded) on the port.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh ☐ : Check this box to enable an automatic refresh of the page at regular intervals.

6.1.7 MVR Status

6.1.7.1 Statistics

This page provides MVR Statistics information.

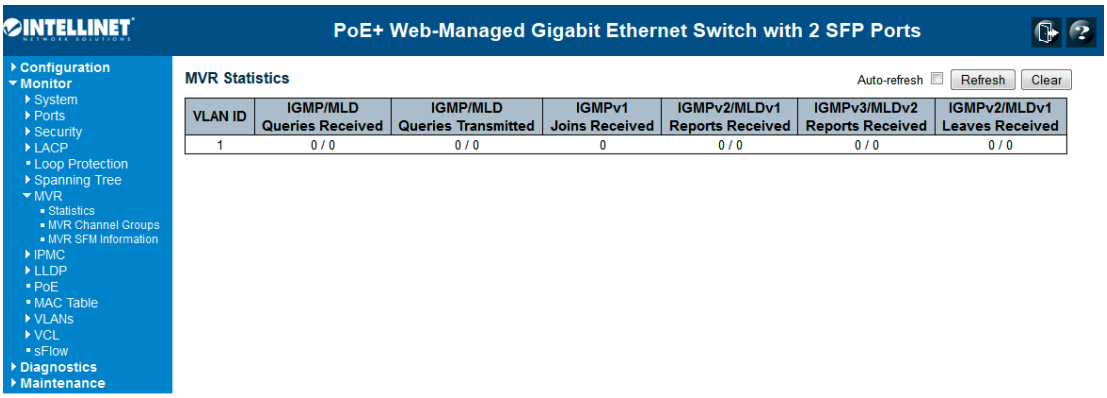

VLAN ID

The Multicast VLAN ID.

V1 Reports Received

The number of Received V1 Reports.

V2 Reports Received

The number of Received V2 Reports.

V3 Reports Received

The number of Received V3 Reports.

V2 Leaves Received

The number of Received V2 Leaves.

Buttons

Refresh: Click to refresh the page immediately.

Clear: Clears all Statistics counters.

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

6.1.7.2 MVR Group Table

Entries in the MVR Group Table are shown on this page. The MVR Group Table is sorted first by VLAN ID, and then by group.

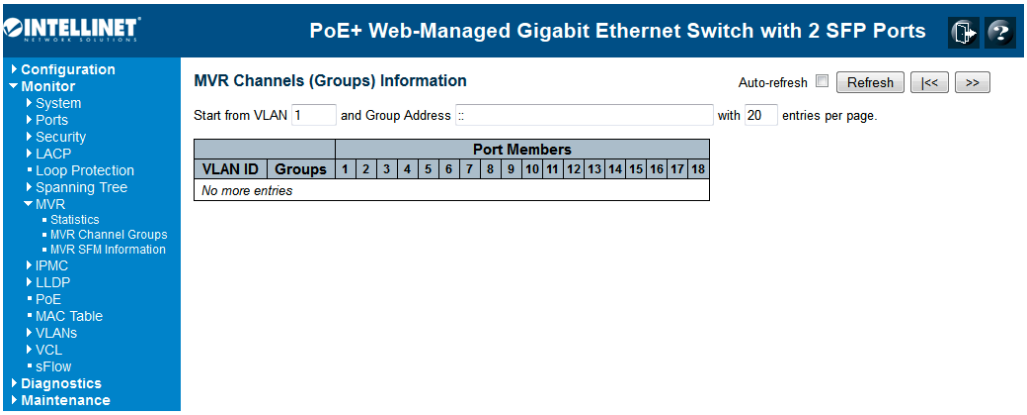

Navigating the MVR Group Table

Each page shows up to 99 entries from the MVR Group table, the default being 20, selected through the "entries per page" input field. When first visited, the Web page will show the first 20 entries from the beginning of the MVR Group Table. The "Start from VLAN" and "Group" input fields allow you to select the starting point in the MVR Group Table. Clicking the **Refresh** button will update the displayed table starting from that or the closest next MVR Group Table match. In addition, the two input fields will — upon a **Refresh** button click — assume the value of the first displayed entry, allowing for continuous refresh with the same start address.
The **>>** will use the last entry of the currently displayed table as a basis for the next lookup. When the end is reached, "No more entries" is shown in the displayed table. Use the **|<<** button to start over.

MVR Group Table Columns

VLAN ID

VLAN ID of the group.

Groups

Group ID of the group displayed.

Port Members

Ports under this group.

Buttons

Auto-refresh ☐ : Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Refreshes the displayed table starting from the input fields.

|<<: Updates the table starting from the first entry in the MVR Group Table.

>>: Updates the table, starting with the entry after the last entry currently displayed.

6.1.8 Monitor / IPMC / IGMP Snooping

6.1.8.1 IGMP Snooping

IGMP Snooping Status

This page provides IGMP Snooping status.

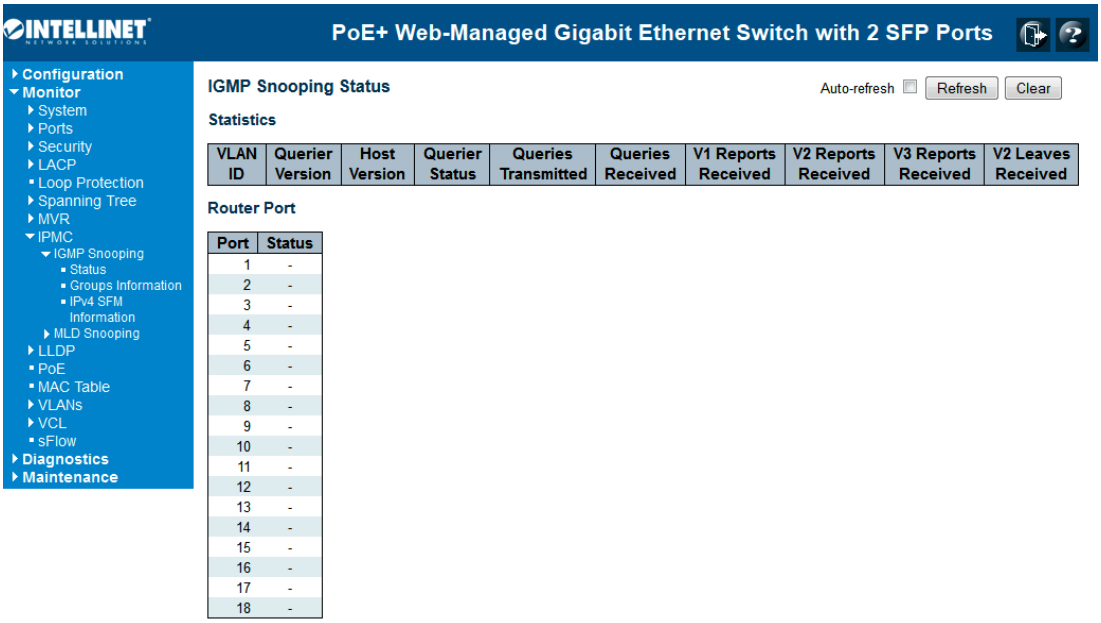

Port	Status
1	-
2	-
3	-
4	-
5	-
6	-
7	-
8	-
9	-
10	-
11	-
12	-
13	-
14	-
15	-
16	-
17	-
18	-

VLAND ID

The VLAN ID of the entry.

Querier Version

Working Querier Version currently.

Host Version

Working Host Version currently.

Querier Status

Shows the Querier status is "ACTIVE" or "IDLE."

"DISABLE" denotes the specific interface is administratively disabled.

Queries Transmitted

The number of Transmitted Queries.

Queries Received

The number of Received Queries.

V1 Reports Received

The number of Received V1 Reports.

V2 Reports Received

The number of Received V2 Reports.

V3 Reports Received

The number of Received V3 Reports.

V2 Leaves Received

The number of Received V2 Leaves.

Router Port

Display which ports act as router ports. A router port is a port on the Ethernet switch that leads toward the Layer 3 multicast device or IGMP querier.

Static denotes the specific port is configured to be a router port.

Dynamic denotes the specific port is learned to be a router port.

Both denotes the specific port is configured and learned to be a router port.

Buttons

Refresh: Click to refresh the page immediately.

Clear: Clears all Statistics counters.

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

IGMP Group Information

Entries in the IGMP Group Table are shown on this page. The IGMP Group Table is sorted first by VLAN ID, and then by group.

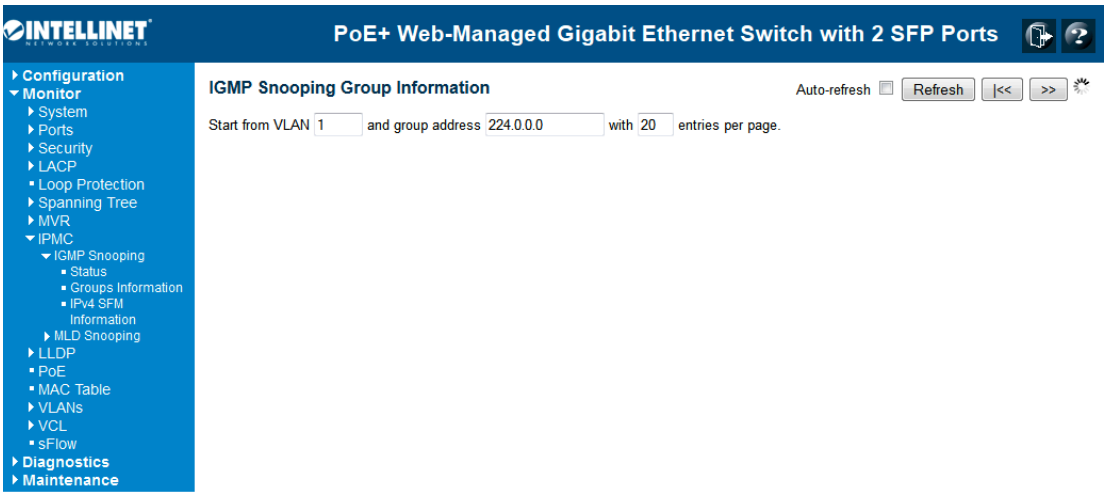

Navigating the IGMP Group Table

Each page shows up to 99 entries from the IGMP Group table, the default being 20, selected through the "entries per page" input field. When first visited, the Web page will show the first 20 entries from the beginning of the IGMP Group Table.
The "Start from VLAN" and "group" input fields allow the user to select the starting point in the IGMP Group Table. Clicking the **Refresh** button will update the displayed table starting from that or the closest next IGMP Group Table match. In addition, the two input fields will — upon a **Refresh** button click — assume the value of the first displayed entry, allowing for continuous refresh with the same start address.
The **>>** will use the last entry of the currently displayed table as a basis for the next lookup. When the end is reached, "No more entries" is shown in the displayed table. Use the **|<<** button to start over.

IGMP Group Table Columns

VLAN ID

VLAN ID of the group.

Groups

Group address of the group displayed.

Port Members

Ports under this group.

Buttons

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Refreshes the displayed table starting from the input fields.

|<<: Updates the table, starting with the first entry in the IGMP Group Table.

>>: Updates the table, starting with the entry after the last entry currently displayed.

IGMP SFM Information Table

Entries in the IGMP SFM Information Table are shown on this page. The IGMP SFM (Souce-Filtered Multicast) Information Table also contains the SSM (Source-Specific Multicast) information. This table is sorted first by VLAN ID, then by group, and then by Port No. Different source addresses belonging to the same group are treated as single entries.

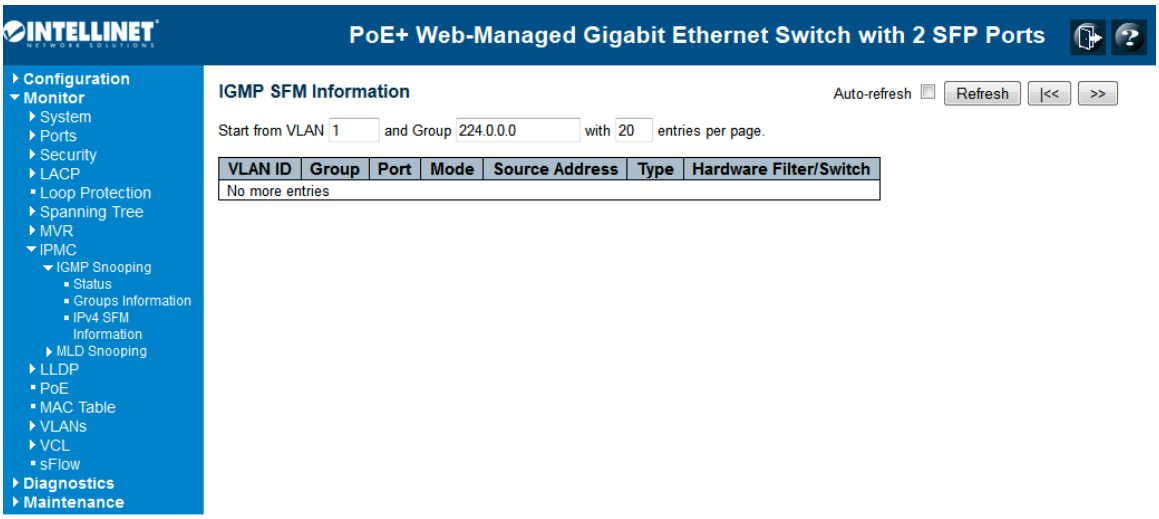

Navigating the IGMP SFM Information Table

Each page shows up to 99 entries from the IGMP SFM Information table, the default being 20, selected through the "entries per page" input field. When first visited, the Web page will show the first 20 entries from the beginning of the IGMP SFM Information Table.

The "Start from VLAN" and "group" input fields allow the user to select the starting point in the IGMP SFM Information Table. Clicking the Refresh button will update the displayed table starting from that or the closest next IGMP SFM Information Table match. In addition, the two input fields will — upon a Refresh button click — assume the value of the first displayed entry, allowing for continuous refresh with the same start address.

The **>>** will use the last entry of the currently displayed table as a basis for the next lookup. When the end is reached, "No more entries" is shown in the displayed table. Use the **|<<** button to start over.

IGMP SFM Information Table Columns

VLAN ID

VLAN ID of the group.

Group

Group address of the group displayed.

Port

Switch port number.

Mode

Indicates the filtering mode maintained per (VLAN ID, port number, Group Address) basis. It can be either Include or Exclude.

Source Address

IP Address of the source. Currently, system limits the total number of IP source addresses for filtering to 128.

Type

Indicates the Type. It can be either Allow or Deny.

Buttons

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Refreshes the displayed table starting from the input fields.

|<<: Updates the table starting from the first entry in the IGMP SFM Information Table.

>>: Updates the table, starting with the entry after the last entry currently displayed.

6.1.8.2 MLD Snooping Status

This page provides MLD Snooping status.

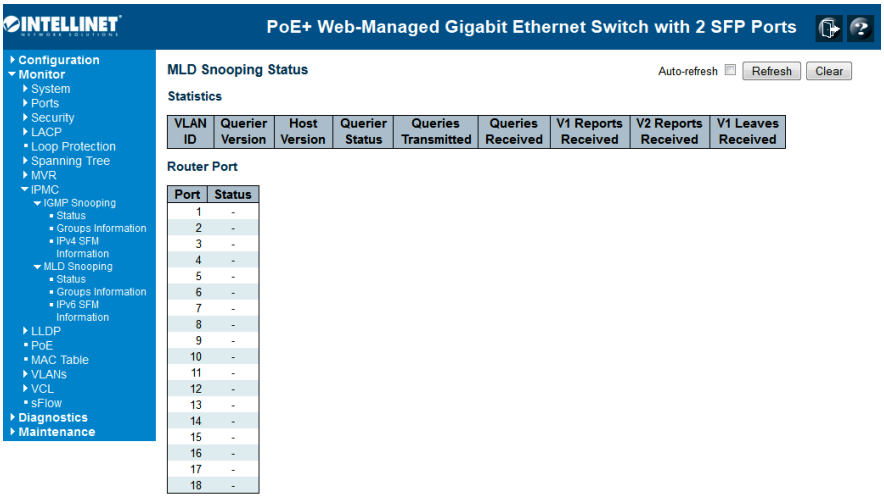

VLAND ID

The VLAN ID of the entry.

Querier Version

Working Querier Version currently.

Host Version

Working Host Version currently.

Querier Status

Show the Querier status is "ACTIVE" or "IDLE."

"DISABLE" denotes the specific interface is administratively disabled.

Queries Transmitted

The number of Transmitted Queries.

Queries Received

The number of Received Queries.

V1 Reports Received

The number of Received V1 Reports.

V2 Reports Received

The number of Received V2 Reports.

V1 Leaves Received

The number of Received V1 Leaves.

Router Port

Display which ports act as router ports. A router port is a port on the Ethernet switch that leads toward the Layer 3 multicast device or IGMP querier.

Static denotes the specific port is configured to be a router port.

Dynamic denotes the specific port is learned to be a router port.

Both denotes the specific port is configured and learned to be a router port.

Buttons

Refresh: Click to refresh the page immediately.

Clear: Clears all Statistics counters.

Auto-refresh ☐ : Check this box to enable an automatic refresh of the page at regular intervals.

MLD Group Table

Entries in the MLD Group Table are shown on this page. The MLD Group Table is sorted first by VLAN ID, and then by group.

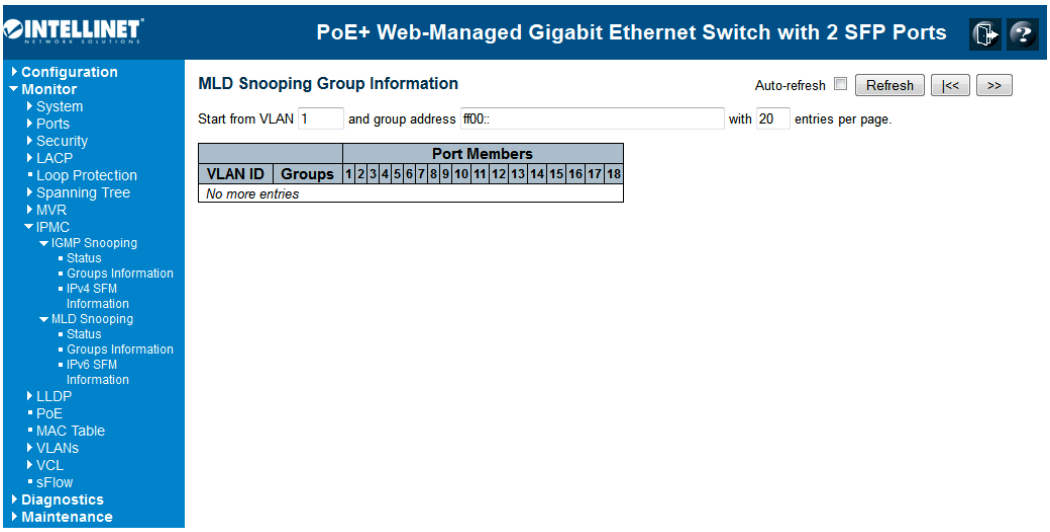

Navigating the MLD Group Table

Each page shows up to 99 entries from the MLD Group table, the default being 20, selected through the "entries per page" input field. When first visited, the Web page will show the first 20 entries from the beginning of the MLD Group Table.

The "Start from VLAN" and "group" input fields allow the user to select the starting point in the MLD Group Table. Clicking the Refresh button will update the displayed table starting from that or the next closest MLD Group Table match. In addition, the two input fields will -— upon a Refresh button click — assume the value of the first displayed entry, allowing for continuous refresh with the same start address.

The **>>** will use the last entry of the currently displayed as a basis for the next lookup. When the end is reached, "No more entries" is shown in the displayed table. Use the **|<<** button to start over.

Buttons

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Refreshes the displayed table starting from the input fields.

|<<: Updates the table starting from the first entry in the MLD Group Table.

>>: Updates the table, starting with the entry after the last entry currently displayed.

MLD SFM Information Table

Entries in the MLD SFM Information Table are shown on this page. The MLD SFM (Souce-Filtered Multicast) Information Table also contains the SSM (Source-Specific Multicast) information. This table is sorted first by VLAN ID, then by group, and then by Port No. Different source addresses belonging to the same group are treated as single entries.

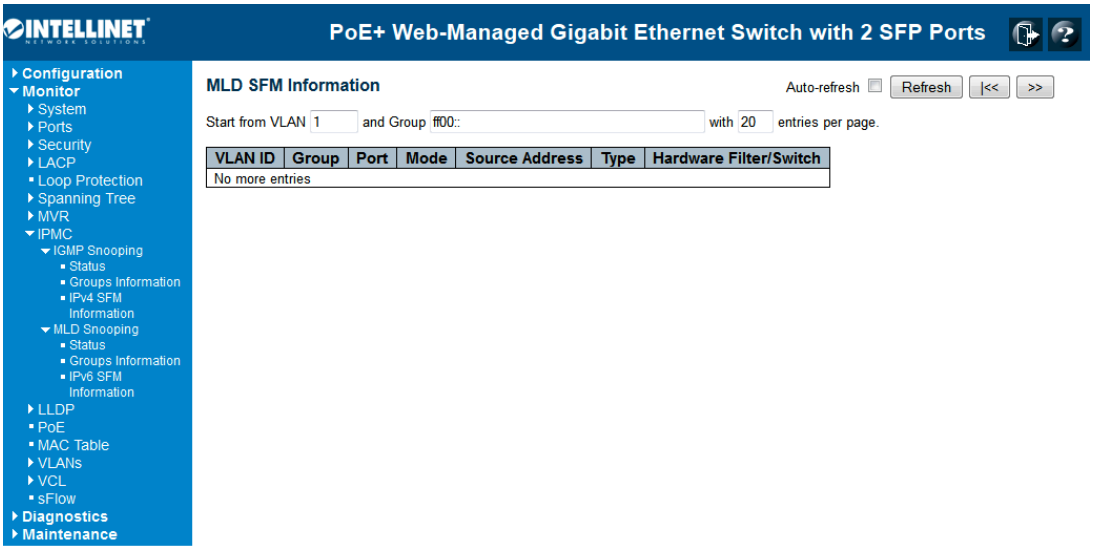

Navigating the MLD SFM Information Table

Each page shows up to 64 entries from the MLD SFM Information table, the default being 20, selected through the "entries per page" input field. When first visited, the Web page will show the first 20 entries from the beginning of the MLD SFM Information Table.

The "Start from VLAN" and "group" input fields allow the user to select the starting point in the MLD SFM Information Table. Clicking the button will update the displayed table starting from that or the closest next MLD SFM Information Table match. In addition, the two input fields will — upon a button click — assume the value of the first displayed entry, allowing for continuous refresh with the same start address.

The will use the last entry of the currently displayed as a basis for the next lookup. When the end is reached, "No more entries" is shown in the displayed table. Use the button to start over.

MLD SFM Information Table Columns

VLAN ID

VLAN ID of the group.

Group

Group address of the group displayed.

Port

Switch port number.

Mode

Indicates the filtering mode maintained per (VLAN ID, port number, Group Address) basis. It can be either Include or Exclude.

Source Address

IP Address of the source. Currently, system limits the total number of IP source addresses for filtering to 128.

Type

Indicates the Type. It can be either Allow or Deny.

Buttons

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Refreshes the displayed table starting from the input fields.

|<<: Updates the table starting from the first entry in the MLD SFP Information Table.

>>: Updates the table, starting with the entry after the last entry currently displayed.

6.1.9 Monitor / LLDP

6.1.9.1 LLDP / Neighbor

This page provides a status overview for all LLDP neighbors. The displayed table contains a row for each port on which an LLDP neighbor is detected. The columns hold the following information:

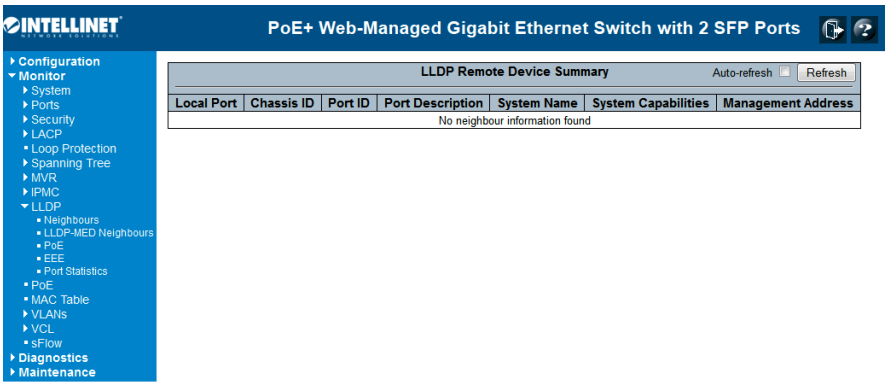

Local Port

The port on which the LLDP frame was received.

Chassis ID

The **Chassis ID** is the identification of the neighbor's LLDP frames.

Remote Port ID

The **Remote Port ID** is the identification of the neighbor port.

System Name

System Name is the name advertised by the neighbor unit.

Port Description

Port Description is the port description advertised by the neighbor unit.

System Capabilities

System Capabilities describes the neighbor unit's capabilities. The possible capabilities:

1. Other
2. Repeater
3. Bridge
4. WAN Access Point
5. Router
6. Telephone
7. DOCSIS cable device
8. Station only
9. Reserved

When a capability is enabled, the capability is followed by (+). If the capability is disabled, the capability is followed by (-).

Management Address

Management Address is the neighbor unit's address that is used for higher-layer entities to assist discovery by the network management. This could, for instance, hold the neighbor's IP address.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh ☐ : Check this box to enable an automatic refresh of the page at regular intervals.

6.1.9.2 LLDP MED Neighbors

This page provides a status overview of all LLDP-MED neighbors. The displayed table contains a row for each port on which an LLDP neighbor is detected. This function applies to VoIP devices which support LLDP-MED. The columns hold the following information:

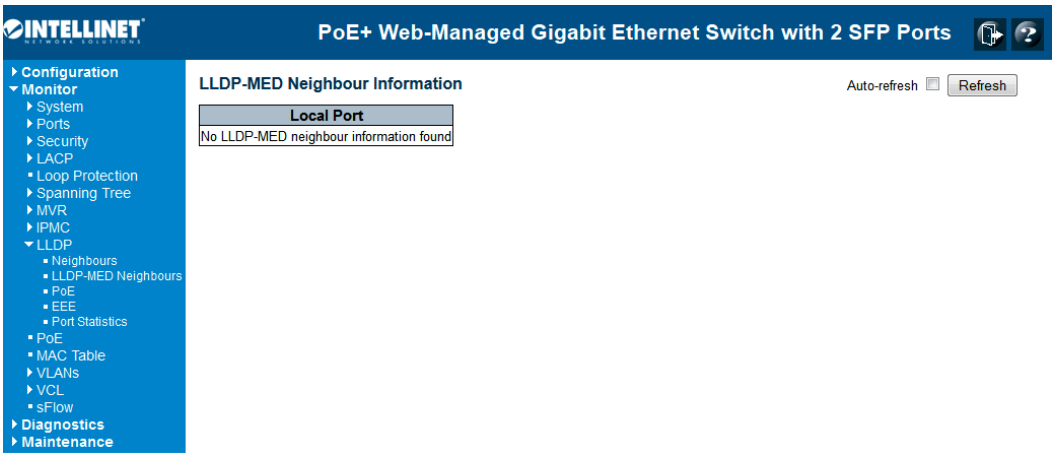

Port

The port on which the LLDP frame was received.

Device Type

LLDP-MED Devices are composed of two primary **Device Types**: Network Connectivity Devices and Endpoint Devices.

LLDP-MED Network Connectivity Device Definition

LLDP-MED Network Connectivity Devices, as defined in TIA-1057, provide access to the IEEE 802-based LAN infrastructure for LLDP-MED Endpoint Devices. An LLDP-MED Network Connectivity Device is a LAN access device based on any of the following technologies:

1. LAN Switch / Router
2. IEEE 802.1 Bridge
3. IEEE 802.3 Repeater (included for historical reasons)
4. IEEE 802.11 Wireless Access Point
5. Any device that supports the IEEE 802.1AB and MED extentions defined by TIA-1057 and can relay IEEE 802 frames via any method.

LLDP-MED Endpoint Device Definition

LLDP-MED Endpoint Devices, as defined in TIA-1057, are located at the IEEE 802 LAN network edge, and participate in IP communication service using the LLDP-MED framework.

Within the LLDP-MED Endpoint Device category, the LLDP-MED scheme is broken into further Endpoint Device Classes, as defined in the following.

Each LLDP-MED Endpoint Device Class is defined to build upon the capabilities defined for the previous Endpoint Device Class. For example, any LLDP-MED Endpoint Device claiming compliance as a Media Endpoint (Class II) also supports all aspects of TIA-1057 applicable to Generic Endpoints (Class I), and any LLDP-MED Endpoint Device claiming compliance as a Communication Device (Class III) will also support all aspects of TIA-1057 applicable to both Media Endpoints (Class II) and Generic Endpoints (Class I).

LLDP-MED Generic Endpoint (Class I)

The LLDP-MED Generic Endpoint (Class I) definition is applicable to all endpoint products that require the base LLDP discovery services defined in TIA-1057 but which do not support IP media or act as an end-user communication appliance. Such devices may include (but are not limited to) IP Communication Controllers, other communication related servers, or any device requiring basic services as defined in TIA-1057.

Discovery services defined in this class include LAN configuration, device location, network policy, power management and inventory management.

LLDP-MED Media Endpoint (Class II)

The LLDP-MED Media Endpoint (Class II) definition is applicable to all endpoint products that have IP media capabilities but which may or may not be associated with a particular end user. Capabilities include all of the capabilities defined for the previous Generic Endpoint Class (Class I), and are extended to include aspects related to media streaming. Example product categories expected to adhere to this class include (but are not limited to) Voice / Media Gateways, Conference Bridges and Media Servers.

Discovery services defined in this class include media type-specific network layer policy discovery.

LLDP-MED Communication Endpoint (Class III)

The LLDP-MED Communication Endpoint (Class III) definition is applicable to all endpoint products that act as end user communication appliances supporting IP media. Capabilities include all of the

capabilities defined for the previous Generic Endpoint (Class I) and Media Endpoint (Class II) classes, and are extended to include aspects related to end user devices. Example product categories expected to adhere to this class include (but are not limited to) end user communication appliances, such as IP Phones, PC-based softphones, or other communication appliances that directly support the end user.

Discovery services defined in this class include provision of location identifier (including ECS / E911 information), embedded L2 switch support and inventory management.

LLDP-MED Capabilities

LLDP-MED Capabilities describes the neighbor unit's LLDP-MED capabilities. The possible capabilities:

1. LLDP-MED capabilities
2. Network Policy
3. Location Identification
4. Extended Power via MDI-PSE
5. Extended Power via MDI-PD
6. Inventory
7. Reserved

Application Type

Application Type indicating the primary function of the application(s) defined for this network policy, advertised by an Endpoint or Network Connectivity Device. The possible application types are shown below.

1. Voice - for use by dedicated IP Telephony handsets and other similar appliances supporting interactive voice services. These devices are typically deployed on a separate VLAN for ease of deployment and enhanced security by isolation from data applications.

2. Voice Signalling - for use in network topologies that require a different policy for the voice signalling than for the voice media.

3. Guest Voice - to support a separate limited feature-set voice service for guest users and visitors with their own IP Telephony handsets and other similar appliances supporting interactive voice services.

4. Guest Voice Signalling - for use in network topologies that require a different policy for the guest voice signalling than for the guest voice media.

5. Softphone Voice - for use by softphone applications on typical data centric devices, such as PCs or laptops.

6. Video Conferencing - for use by dedicated Video Conferencing equipment and other similar appliances supporting real-time interactive video/audio services.

7. Streaming Video - for use by broadcast- or multicast-based video content distribution and other similar applications supporting streaming video services that require specific network policy treatment. Video applications relying on TCP with buffering would not be an intended use of this application type.

8. Video Signalling - for use in network topologies that require a separate policy for the video signalling than for the video media.

Policy

Policy indicates that an Endpoint Device wants to explicitly advertise that the policy is required by the device. Can be either Defined or Unknown.

Unknown: The network policy for the specified application type is currently unknown.

Defined: The network policy is defined.

TAG

TAG is indicative of whether the specified application type is using a tagged or an untagged VLAN. Can be Tagged or Untagged.

Untagged: The device is using an untagged frame format and, as such, does not include a tag header as defined by IEEE 802.1Q-2003.

Tagged: The device is using the IEEE 802.1Q tagged frame format.

VLAN ID

VLAN ID is the VLAN identifier (VID) for the port as defined in IEEE 802.1Q-2003. A value of 1 through 4094 is used to define a valid VLAN ID. A value of 0 (Priority Tagged) is used if the device is using priority tagged frames as defined by IEEE 802.1Q-2003, meaning that only the IEEE 802.1D priority level is significant and the default PVID of the ingress port is used instead.

Priority

Priority is the Layer 2 priority to be used for the specified application type. There are eight priority levels (0 through 7).

DSCP

DSCP is the DSCP value to be used to provide Diffserv node behavior for the specified application type as defined in IETF RFC 2474. Contains one of 64 code point values (0 through 63).

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

6.1.9.3 LLDP PoE

This page provides a status overview for all LLDP PoE neighbors. The displayed table contains a row for each port on which an LLDP PoE neighbor is detected. The columns hold the following information:

Local Port

The port for this switch on which the LLDP frame was received.

Power Type

Power Type represents whether the device is a Power Sourcing Entity (PSE) or Power Device (PD). If the Power Type is unknown, it is represented as "Reserved."

Power Source

The Power Source represents the power source being utilized by a PSE or PD device.

If the device is a PSE device, it can either run on its Primary Power Source or its Backup Power Source. If it is unknown whether the PSE device is using its Primary Power Source or its Backup Power Source it is indicated as "Unknown."

If the device is a PD device, it can either run on its local power supply or it can use the PSE as power source. It can also use both its local power supply and the PSE.

If it is unknown what power supply the PD device is using it is indicated as "Unknown."

Power Priority

Power Priority represents the priority of the PD device, or the power priority associated with the PSE type device's port that is sourcing the power. There are three levels of power priority: Critical, High and Low. If the power priority is unknown it is indicated as "Unknown."

Maximum Power

The **Maximum Power** Value contains a numerical value that indicates the maximum power in watts required by a PD device from a PSE device, or the minimum power a PSE device is capable of sourcing over a maximum length cable based on its current configuration.

The maximum allowed value is 102.3 W. If the device indicates value higher than 102.3 W, it is represented as "reserved."

Buttons

Auto-refresh : Check this box to refresh the page automatically. Automatic refresh occurs every 3 seconds.

Refresh: Click to refresh the page.

6.1.9.4 LLDP EEE

By using EEE, power savings can be achieved at the expense of traffic latency. This latency occurs because the circuits EEE turn off to save power or need time to boot up before sending traffic over the link. This time is called "wakeup time." To achieve minimal latency, devices can use LLDP to exchange information about their respective tx and rx "wakeup time" as a way to agree upon the minimum wakeup time they need.

This page provides an overview of EEE information exchanged by LLDP.

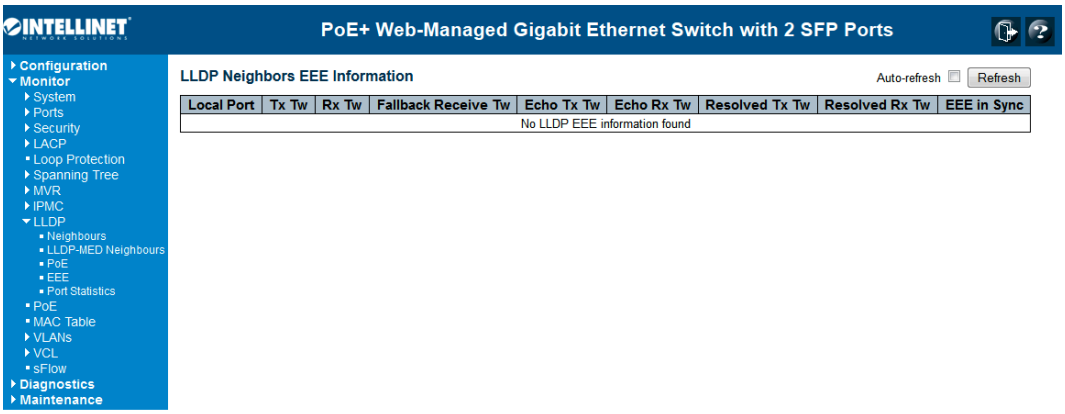

LLDP Neighbors EEE Information

The displayed table contains a row for each port. The columns hold the following information:

Local Port

The port on which LLDP frames are received or transmitted.

Tx Tw

The link parther's maximum time that transmit path can hold off sending data after deassertion of LPI.

Rx Tw

The link parther's time that receiver would like the transmitter to hold off to allow time for the receiver to wake from sleep.

Fallback Receive Tw

The link parther's fallback receive Tw.

A receiving link partner may inform the transmitter of an alternate desired Tw_sys_tx. Since a receiving link partner is likely to have discrete levels for savings, this provides the transmitter with additional information that it may use for a more efficient allocation. Systems that do not implement this option default the value to be the same as that of the Receive Tw_sys_tx.

Echo Tx Tw

The link partner's Echo Tx Tw value.

The respective echo values shall be defined as the local link partner’s reflection (echo) of the remote link partner’s respective values. When a local link partner receives its echoed values from the remote link partner, it can determine whether or not the remote link partner has received, registered and processed its most recent values. For example, if the local link partner receives echoed parameters that do not match the values in its local MIB, then the local link partner infers that the remote link partner’s request was based on stale information.

Echo Rx Tw

The link partner's Echo Rx Tw value.

Resolved Tx Tw

The resolved Tx Tw for this link. Note: NOT the link parther.

The resolved value that is the actual "tx wakeup time" used for this link (based on EEE information exchanged via LLDP).

Resolved Rx Tw

The resolved Rx Tw for this link. Note: NOT the link parther.

The resolved value that is the actual "tx wakeup time" used for this link (based on EEE information exchanged via LLDP).

EEE activated

Shows if the switch and the link partner have agree upon which wakeup times to use.

Red - Switch and link partner have not agreed upon wakeup time.

Green - Switch and link partner have agreed upon wakeup time.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh ☐ : Check this box to enable an automatic refresh of the page at regular intervals.

6.1.9.5 LLDP Statistics

This page provides an overview of all LLDP traffic.

Two types of counters are shown. Global counters are counters that refer to the whole switch, while local counters refer to per port counters for the currently selected switch.

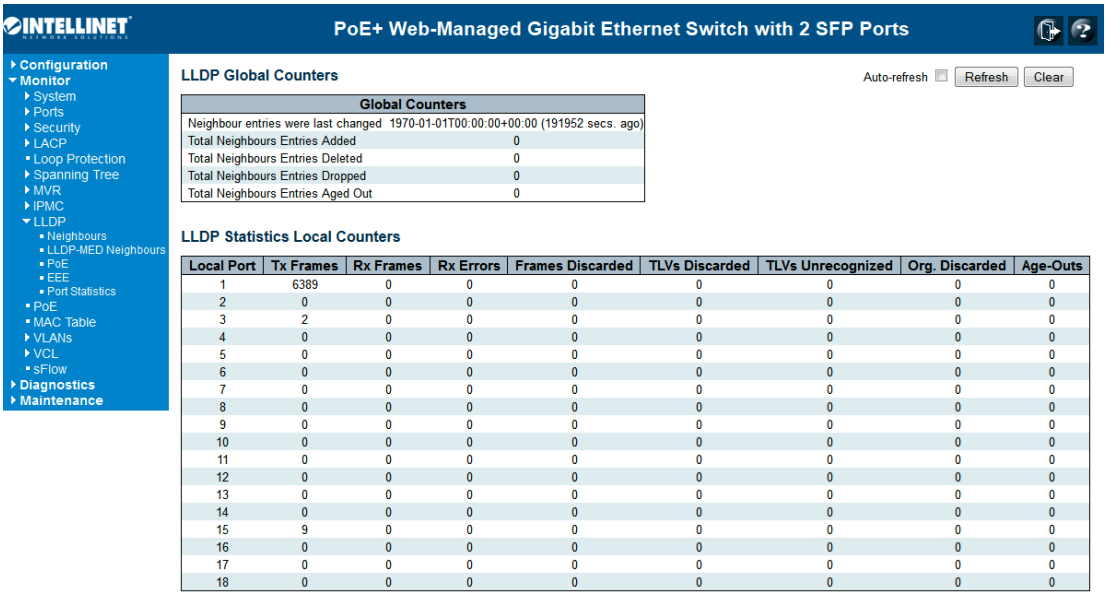
PoE+ Web-Managed Gigabit Ethernet Switch with 2 SFP Ports
Configuration
Monitor
System
Ports
Security
LACP
Loop Protection
Spanning Tree
MVR
IPMC
LLDP
Neighbours
LLDP-MED Neighbours
PoE
EEE
Port Statistics
PoE
MAC Table
VLANs
VCL
sFlow
Diagnostics
Maintenance
LLDP Global Counters
Auto-refresh
Refresh
Clear
Global Counters
Neighbour entries were last changed 1970-01-01T00:00:00+00:00 (191952 secs. ago)
Total Neighbours Entries Added 0
Total Neighbours Entries Deleted 0
Total Neighbours Entries Dropped 0
Total Neighbours Entries Aged Out 0
LLDP Statistics Local Counters
Local Port | Tx Frames | Rx Frames | Rx Errors | Frames Discarded | TLVs Discarded | TLVs Unrecognized | Org. Discarded | Age-Outs
1 6389 0 0 0 0 0 0 0
2 0 0 0 0 0 0 0 0
3 2 0 0 0 0 0 0 0
4 0 0 0 0 0 0 0 0
5 0 0 0 0 0 0 0 0
6 0 0 0 0 0 0 0 0
7 0 0 0 0 0 0 0 0
8 0 0 0 0 0 0 0 0
9 0 0 0 0 0 0 0 0
10 0 0 0 0 0 0 0 0
11 0 0 0 0 0 0 0 0
12 0 0 0 0 0 0 0 0
13 0 0 0 0 0 0 0 0
14 0 0 0 0 0 0 0 0
15 9 0 0 0 0 0 0 0
16 0 0 0 0 0 0 0 0
17 0 0 0 0 0 0 0 0
18 0 0 0 0 0 0 0 0

Global Counters

Neighbor entries were last changed on

It also shows the time when the last entry was last deleted or added. It also shows the time elapsed since the last change was detected.

Total Neighbors Entries Added

Shows the number of new entries added since switch reboot.

Total Neighbors Entries Deleted

Shows the number of new entries deleted since switch reboot.

Total Neighbors Entries Dropped

Shows the number of LLDP frames dropped due to the entry table being full.

Total Neighbors Entries Aged Out

Shows the number of entries deleted due to Time-To-Live expiring.

Local Counters

The displayed table contains a row for each port. The columns hold the following information:

Local Port

The port on which LLDP frames are received or transmitted.

Tx Frames

The number of LLDP frames transmitted on the port.

Rx Frames

The number of LLDP frames received on the port.

Rx Errors

The number of received LLDP frames containing some kind of error.

Frames Discarded

If an LLDP frame is received on a port, and the switch's internal table has run full, the LLDP frame is counted and discarded. This situation is known as "Too Many Neighbors" in the LLDP standard. LLDP frames require a new entry in the table when the Chassis ID or Remote Port ID is not already contained within the table. Entries are removed from the table when a given port's link is down, when an LLDP shutdown frame is received, or when the entry ages out.

TLVs Discarded

Each LLDP frame can contain multiple pieces of information, known as TLVs (TLV is short for "Type Length Value"). If a TLV is malformed, it is counted and discarded.

TLVs Unrecognized

The number of well-formed TLVs, but with an unknown type value.

Org. Discarded

The number of organizationally received TLVs.

Age-Outs

Each LLDP frame contains information about how long time the LLDP information is valid (age-out time). If no new LLDP frame is received within the age-out time, the LLDP information is removed and the **Age-Out** counter is incremented.

Buttons

Refresh: Click to refresh the page immediately.

Clear: Clears the local counters. All counters (including global counters) are cleared upon reboot.

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

6.1.10 Dynamic MAC Table

Entries in the MAC Table are shown on this page. The MAC Table contains up to 8192 entries and is sorted first by VLAND ID, then by MAC address.

Navigating the MAC Table

Each page shows up to 999 entries from the MAC table, the default being 20, selected through the "entries per page" input field. When first visited, the Web page will show the first 20 entries from the beginning of the MAC Table. The first displayed will be the one with the lowest VLAN ID and the lowest MAC address found in the MAC Table.

The "Start from MAC address" and "VLAN" input fields allow the user to select the starting point in the MAC Table. Clicking the button will update the displayed table starting from that or the closest next MAC Table match. In addition, the two input fields will — upon a button click — assume the value of the first displayed entry, allowing for continuous refresh with the same start address.

The last entry of the currently displayed VLAN/MAC address pairs is used as a basis for the next lookup. When the end is reached, "No more entries" is shown in the displayed table. Use the button to start over.

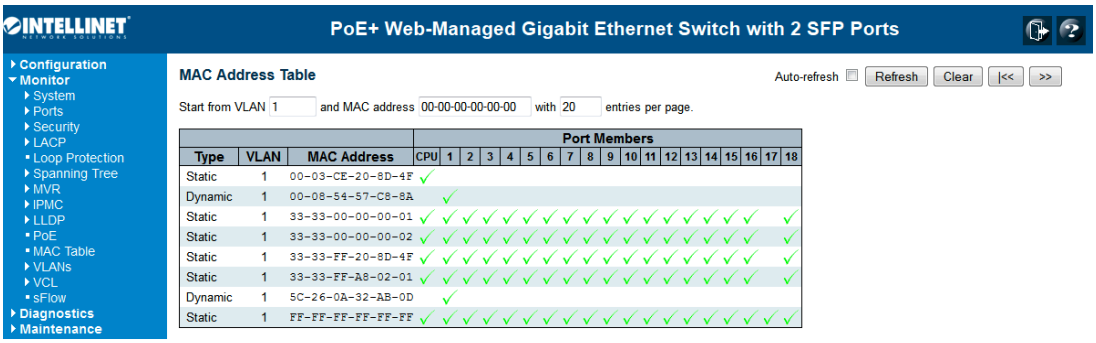

MAC Table Columns

Switch (stack only)

The stack unit where the entry is learned.

Type

Indicates whether the entry is a static or a dynamic entry.

MAC address

The MAC address of the entry.

VLAN

The VLAN ID of the entry.

Port Members

The ports that are members of the entry.

Buttons

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Refreshes the displayed table starting from the "Start from MAC address" and "VLAN" input fields.

Clear: Flushes all dynamic entries.

|<<: Updates the table starting from the first entry in the MAC Table; i.e., the entry with the lowest VLAN ID and MAC address.

>>: Updates the table, starting with the entry after the last entry currently displayed.

6.1.11 VLAN Membership Status

This page provides an overview of membership status of VLAN users.

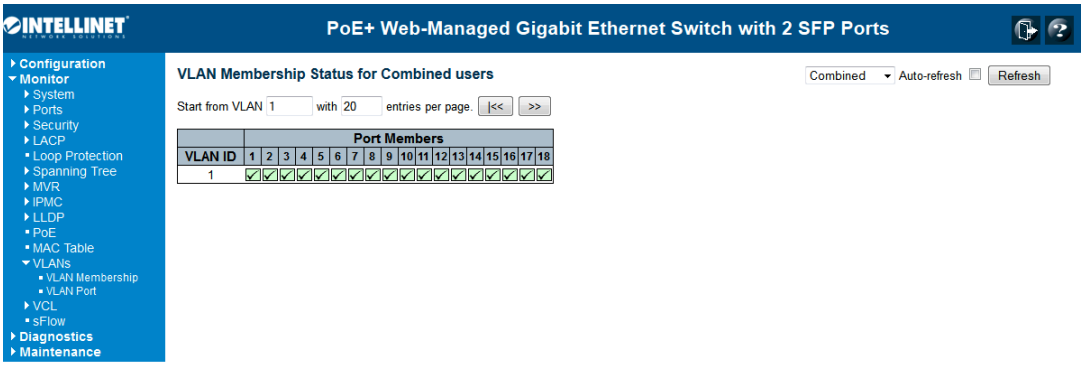

VLAN USER

VLAN User module uses services of the VLAN management functionality to configure VLAN memberships and VLAN port configurations, such as PVID and UVID. Currently, the following VLAN user types are supported:

CLI/Web/SNMP: These are referred to as static.

NAS: NAS provides port-based authentication, which involves communication between a Supplicant, Authenticator and an Authentication Server.

MVRP: Multiple VLAN Registration Protocol (MVRP) allows dynamic registration and deregistration of VLANs on ports on a VLAN-bridged network.

Voice VLAN: Voice VLAN is a VLAN configured specially for voice traffic typically originating from IP phones.

MVR: MVR is used to eliminate the need to duplicate multicast traffic for subscribers in each VLAN. Multicast traffic for all channels is sent only on a single (multicast) VLAN.

MSTP: The 802.1s Multiple Spanning Tree protocol (MSTP) uses VLANs to create multiple spanning trees in a network, which significantly improves network resource utilization while maintaining a loop-free environment.

Port Members

A row of check boxes for each port is displayed for each VLAN ID.
If a port is included in a VLAN, an image will be displayed.
If a port is included in a Forbidden port list, an image will be displayed.
If a port is included in a Forbidden port list and dynamic VLAN user register VLAN on same Forbidden port, then conflict port will be displayed as .

VLAN Membership

The VLAN Membership Status Page will show the current VLAN port members for all VLANs configured by a selected VLAN User (selection shall be allowed by a Combo Box). When ALL VLAN Users are selected, it will show this information for all the VLAN Users, and this is by default. VLAN membership allows the frames classified to the VLAN ID to be forwarded on the respective VLAN member ports.

Navigating the VLAN Monitor page

Each page shows up to 99 entries from the VLAN table, the default being 20, selected through the "entries per page" input field. When first visited, the Web page will show the first 20 entries from the beginning of the VLAN Table. The first displayed will be the one with the lowest VLAN ID found in the VLAN Table.
The "VLAN" input fields allow the user to select the starting point in the VLAN Table. Clicking the button will update the displayed table starting from that or the closest next VLAN Table match. The last entry of the currently displayed VLAN entry is used as a basis for the next lookup. When the end is reached, "No more entries" is shown in the displayed table. Use the button to start over.

Buttons

: Select VLAN Users from this drop-down list.

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

VLAN Port Status

This page provides VLAN Port Status.

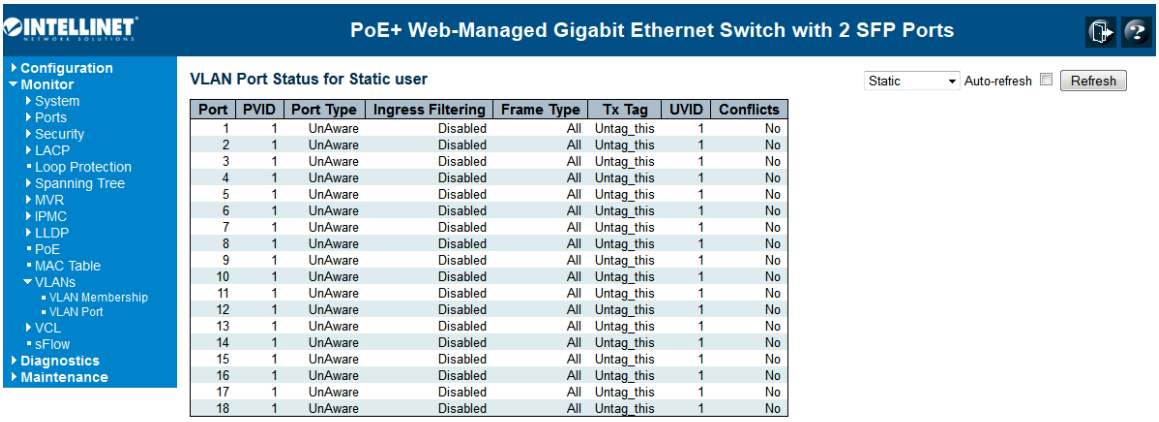

Port	PVID	Port Type	Ingress Filtering	Frame Type	Tx Tag	UVID	Conflicts
1	1	UnAware	Disabled	All	Untag_this	1	No
2	1	UnAware	Disabled	All	Untag_this	1	No
3	1	UnAware	Disabled	All	Untag_this	1	No
4	1	UnAware	Disabled	All	Untag_this	1	No
5	1	UnAware	Disabled	All	Untag_this	1	No
6	1	UnAware	Disabled	All	Untag_this	1	No
7	1	UnAware	Disabled	All	Untag_this	1	No
8	1	UnAware	Disabled	All	Untag_this	1	No
9	1	UnAware	Disabled	All	Untag_this	1	No
10	1	UnAware	Disabled	All	Untag_this	1	No
11	1	UnAware	Disabled	All	Untag_this	1	No
12	1	UnAware	Disabled	All	Untag_this	1	No
13	1	UnAware	Disabled	All	Untag_this	1	No
14	1	UnAware	Disabled	All	Untag_this	1	No
15	1	UnAware	Disabled	All	Untag_this	1	No
16	1	UnAware	Disabled	All	Untag_this	1	No
17	1	UnAware	Disabled	All	Untag_this	1	No
18	1	UnAware	Disabled	All	Untag_this	1	No

VLAN User

VLAN User module uses services of the VLAN management functionality to configure VLAN memberships and VLAN port configuration, such as PVID and UVID. Currently, the following VLAN User types are supported:

CLI/Web/SNMP: These are referred to as static.

NAS: NAS provides port-based authentication, which involves communications between a Supplicant, Authenticator and an Authentication Server.

MVRP: Multiple VLAN Registration Protocol (MVRP) allows dynamic registration and deregistration of VLANs on ports on a VLAN-bridged network.

Voice VLAN: Voice VLAN is a VLAN configured specially for voice traffic, typically originating from IP phones.

MVR: MVR is used to eliminate the need to duplicate multicast traffic for subscribers in each VLAN. Multicast traffic for all channels is sent only on a single (multicast) VLAN.

MSTP: The 802.1s Multiple Spanning Tree protocol (MSTP) uses VLANs to create multiple spanning trees in a network, which significantly improves network resource utilization while maintaining a loop-free environment.

Port

The logical port for the settings contained in the same row.

PVID

Shows the VLAN identifier for that port. The allowed values are 1 through 4095. The default value is 1.

Port Type

Shows the Port Type. Port type can be any of Unaware, C-port, S-port, Custom S-port.

If Port Type is Unaware, all frames are classified to the Port VLAN ID and tags are not removed.

C-port is Customer Port. S-port is Service port. Custom S-port is S-port with Custom TPID.

Ingress Filtering

Shows the ingress filtering on a port. This parameter affects VLAN ingress processing. If ingress filtering is enabled and the ingress port is not a member of the classified VLAN, the frame is discarded.

Frame Type

Shows whether the port accepts all frames or only tagged frames. This parameter affects VLAN ingress processing. If the port only accepts tagged frames, untagged frames received on that port are discarded.

Tx Tag

Shows egress filtering frame status whether tagged or untagged.

UVID

Shows UVID (untagged VLAN ID). Port's UVID determines the packet's behavior at the egress side.

Conflicts

Shows status of Conflicts whether exists or not. When a Volatile VLAN User requests to set VLAN membership or VLAN port configuration, the following conflicts can occur:

Functional Conflicts between features.

Conflicts due to hardware limitation.

Direct conflict between user modules.

Buttons

: Select VLAN Users from this drop down list.

Auto-refresh : Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

6.1.13 VCL MAC-Based VLAN Status

This page shows MAC-based VLAN entries configured by various MAC-based VLAN users. Currently, the following VLAN User types are supported:

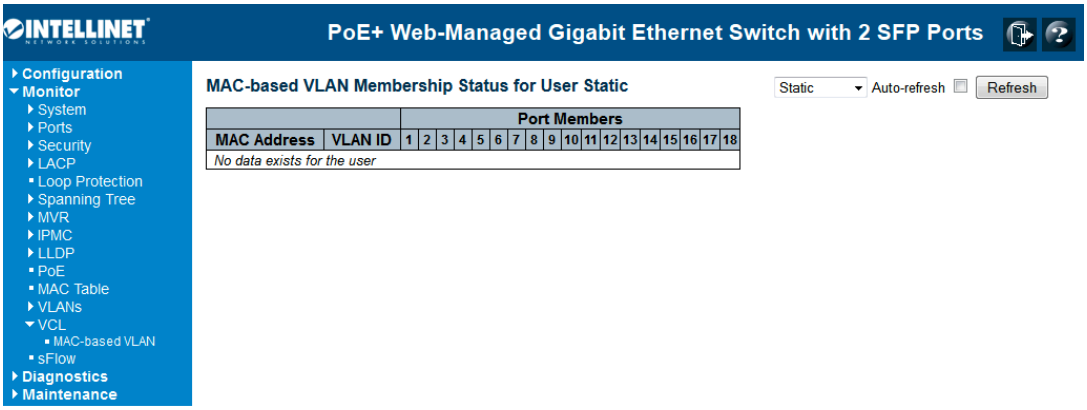

CLI/Web/SNMP: These are referred to as static.

NAS: NAS provides port-based authentication, which involves communications between a Supplicant, Authenticator and an Authentication Server.

MAC Address

Indicates the MAC address.

VLAN ID

Indicates the VLAN ID.

Port Members

Port members of the MAC-based VLAN entry.

Buttons

Refresh: Refreshes the displayed table.

6.1.14 sFlow

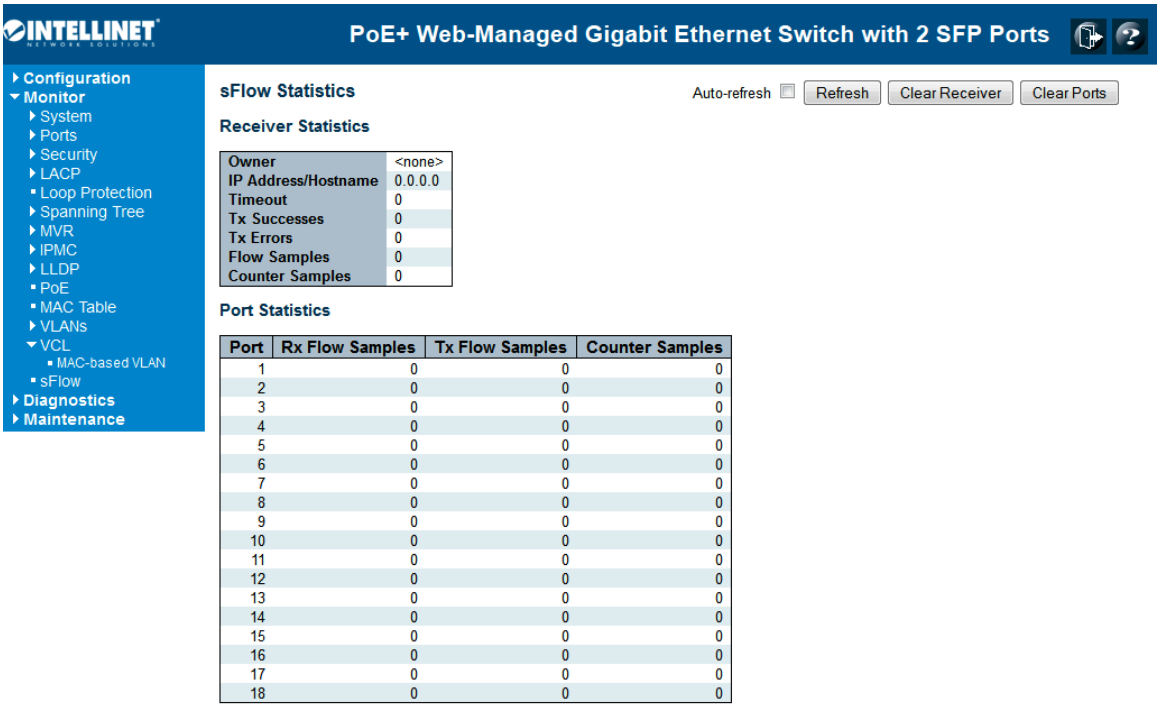

This page shows the sFlow Statistics.

Flow Sampling

Packet flow sampling refers to arbitrarily choosing some packets out of a specified number, reading the first "Max Hdr Size" bytes and exporting the sampled datagram for analysis.
The attributes associated with the flow sampling are sampler type, sampling rate, maximum header size.

Counter Sampling

Counter sampling performs periodic, time-based sampling or polling of counters associated with an interface enabled for sFlow.
The attribute associated with counter sampling is polling interval.

sFlow Ports

List of the port numbers on which sFlow is configured.

Sampler Type

Configured sampler type on the port and could be any of these types: None, RX, TX, ALL.

6.2 Diagnostic

This section provides some convenient tools for you to do switch diagnostics from a remote site.

6.2.1 Ping

This page allows you to issue ICMP PING packets to troubleshoot IP connectivity issues.

Type the IP Address, ping length (default = 56 bytes), ping count (default=5) and ping interval (default =1). Then click "Start" to start pinging a remote host. After you click "Start," 5 ICMP packets are transmitted, and the sequence number and round-trip time are displayed upon reception of a reply. The page refreshes automatically until responses to all packets are received, or until a timeout occurs.

ICMP Ping Output Result

PING server 192.168.2.100, 56 bytes of data.

64 bytes from 192.168.2.100: icmp_seq=0, time=0ms

64 bytes from 192.168.2.100: icmp_seq=1, time=0ms

64 bytes from 192.168.2.100: icmp_seq=2, time=0ms

64 bytes from 192.168.2.100: icmp_seq=3, time=0ms

64 bytes from 192.168.2.100: icmp_seq=4, time=0ms

Sent 5 packets, received 5 OK, 0 bad

IP Address
The destination IP Address.
Ping Length
The payload size of the ICMP packet. Values range from 2 bytes to 1452 bytes.
Ping Count
The count of the ICMP packet. Values range from 1 time to 60 times.
Ping Interval
The interval of the ICMP packet. Values range from 0 seconds to 30 seconds.

6.2.2 Ping6

This page allows you to issue ICMPv6 PING packets to troubleshoot IPv6 connectivity issues.

Type the IPv6 Address, ping length (default = 56 bytes), ping count (default=5) and ping interval (default =1). Then click "Start" to start ping a remote host. After you click "Start," 5 ICMPv6 packets are transmitted, and the sequence number and round-trip time are displayed upon reception of a reply. The page refreshes automatically until responses to all packets are received, or until a timeout occurs.

ICMPv6 Ping Output

PING6 server ::10.10.132.20
64 bytes from ::10.10.132.20: icmp_seq=0, time=0ms
64 bytes from ::10.10.132.20: icmp_seq=1, time=0ms
64 bytes from ::10.10.132.20: icmp_seq=2, time=0ms
64 bytes from ::10.10.132.20: icmp_seq=3, time=0ms
64 bytes from ::10.10.132.20: icmp_seq=4, time=0ms
Sent 5 packets, received 5 OK, 0 bad

You can configure the following properties of the issued ICMP packets:

IP Address
The destination IP Address.
Ping Length
The payload size of the ICMP packet. Values range from 2 bytes to 1452 bytes.
Ping Count
The count of the ICMP packet. Values range from 1 time to 60 times.
Ping Interval
The interval of the ICMP packet. Values range from 0 seconds to 30 seconds.

6.2.3 VeriPHY Cable Diagnostic

This page is used for running the VeriPHY Cable Diagnostics.

Select the port and then press **Start** to run the diagnostics. This will take approximately 5 seconds. If all ports are selected, this can take approximately 15 seconds. When completed, the page refreshes automatically, and you can view the cable diagnostics results in the cable status table. Note that VeriPHY is only accurate for cables lengths of 7-140 meters.

10 and 100 Mbps ports will be linked down while running VeriPHY. Therefore, running VeriPHY on a 10 or 100 Mbps management port will cause the switch to stop responding until VeriPHY is complete.

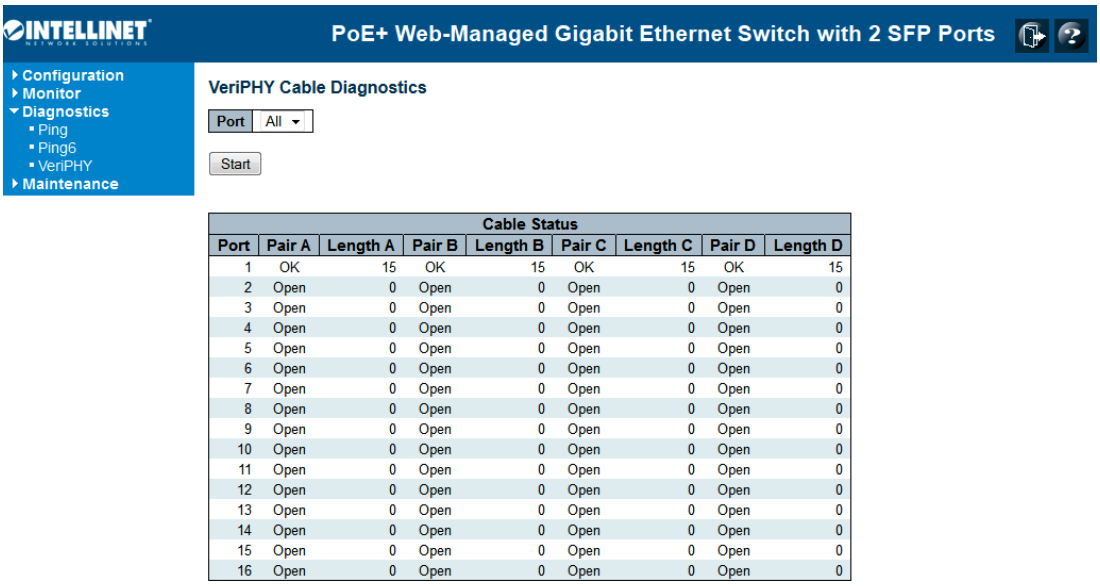
INTELLINET
PoE+ Web-Managed Gigabit Ethernet Switch with 2 SFP Ports
Configuration
Monitor
Diagnostics
Ping
Ping6
VeriPHY
Maintenance
VeriPHY Cable Diagnostics
Port
All
Start
Cable Status
Port Pair A Length A Pair B Length B Pair C Length C Pair D Length D
1 OK 15 OK 15 OK 15 OK 15
2 Open 0 Open 0 Open 0 Open 0
3 Open 0 Open 0 Open 0 Open 0
4 Open 0 Open 0 Open 0 Open 0
5 Open 0 Open 0 Open 0 Open 0
6 Open 0 Open 0 Open 0 Open 0
7 Open 0 Open 0 Open 0 Open 0
8 Open 0 Open 0 Open 0 Open 0
9 Open 0 Open 0 Open 0 Open 0
10 Open 0 Open 0 Open 0 Open 0
11 Open 0 Open 0 Open 0 Open 0
12 Open 0 Open 0 Open 0 Open 0
13 Open 0 Open 0 Open 0 Open 0
14 Open 0 Open 0 Open 0 Open 0
15 Open 0 Open 0 Open 0 Open 0
16 Open 0 Open 0 Open 0 Open 0

Port

The port where you are requesting VeriPHY Cable Diagnostics.

Cable Status

Port: Port number.

Pair: The status of the cable pair.

The status of the cable pair.
OK - Correctly terminated pair
Open - Open pair
Short - Shorted pair
Short A - Cross-pair short to pair A
Short B - Cross-pair short to pair B
Short C - Cross-pair short to pair C
Short D - Cross-pair short to pair D
Cross A - Abnormal cross-pair coupling with pair A
Cross B - Abnormal cross-pair coupling with pair B
Cross C - Abnormal cross-pair coupling with pair C

Cross D - Abnormal cross-pair coupling with pair D

Length: The length (in meters) of the cable pair.

6.3 Maintenance

The section allows you to maintain the switch, such as Reset Factory Default, Firmware upgrading, Configuration Save/Restore and Restart the device.

6.3.1 Restart Device

You can restart the switch on this page. After restart, the switch will boot normally.

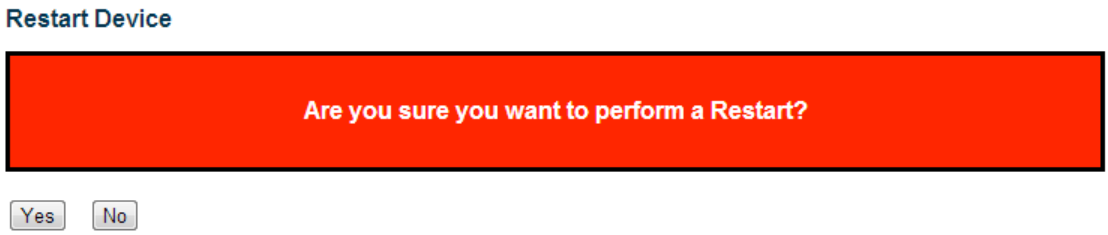

Yes: Click to restart device.

No: Click to return to the Port State page without restarting.

6.3.2 Factory Defaults

You can reset the configuration of the switch on this page. Only the IP configuration is retained.

The new configuration is available immediately, which means that no restart is necessary.

Yes: Click to reset the configuration to Factory Defaults.

No: Click to return to the Port State page without resetting the configuration.

Note: Restoring factory defaults can also be performed by making a physical loopback between port 1 and port 2 within the first minute from switch reboot. In the first minute after boot, “loopback” packets

will be transmitted at port 1. If a “loopback” packet is received at port 2 the switch will do a restore to default.

6.3.3 Software Upload

6.3.3.1 Firmware Update

This page facilitates an update of the firmware controlling the switch.

Browse to the location of a software image, you can see the file name in the right of the Browse command. Click **Upload** to start the process.

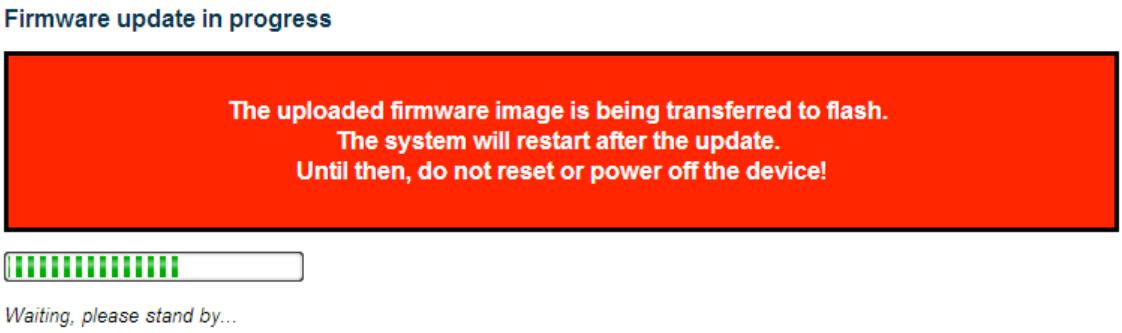
Firmware update in progress
The uploaded firmware image is being transferred to flash.
The system will restart after the update.
Until then, do not reset or power off the device!
Waiting, please stand by...

After the software image is uploaded, a page announces that the firmware update is initiated. After about a minute, the firmware is updated and the switch restarts.

***Warning**: While the firmware is being updated, Web access appears to be defunct. The front LED flashes Green/Off with a frequency of 10 Hz while the firmware update is in progress.* ***Do not restart or power off the device at this time** or the switch may fail to function afterward.*

6.3.3.2 Image Select

There are two images saved within the switch.

This page provides information about the active and alternate (backup) firmware images in the device, and allows you to revert to the alternate image.

The Web page displays two tables with information about the active and alternate firmware images.

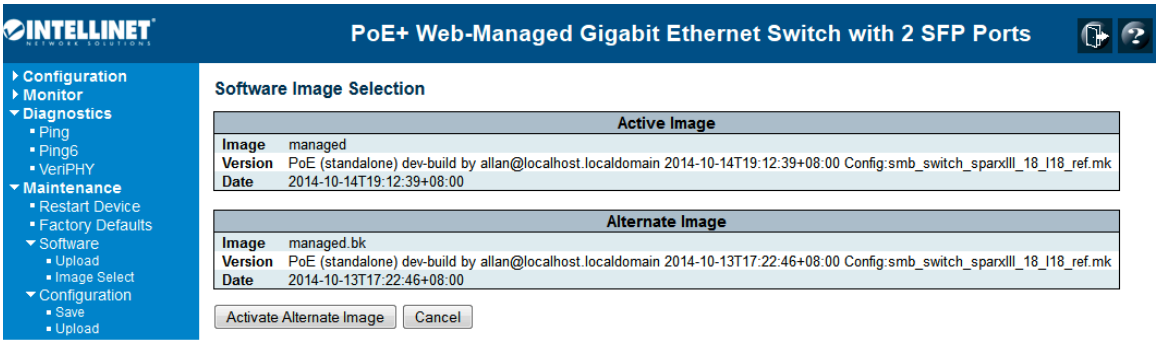

Note:

1. In case the active firmware image is the alternate image, only the "Active Image" table is shown. In this case, the Activate Alternate Image button is also disabled.
2. If the alternate image is active (due to a corruption of the primary image or by manual intervention), uploading a new firmware image to the device will automatically use the primary image slot and activate this.
3. The firmware version and date information may be empty for older firmware releases. This does not constitute an error.

Image Information

Image

The flash index name of the firmware image. The name of primary (preferred) image is image**;** the alternate image is named image.bk.

Version

The version of the firmware image.

Date

The date where the firmware was produced.

Buttons

Activate Alternate Image: Click to use the alternate image. This button may be disabled depending on system state.

Cancel: Cancel activating the backup image. Navigates away from this page.

6.3.4 Configuration

You can save/view or load the switch configuration. The configuration file is in XML format with a hierarchy of tags:

Header tags: <?xml version="1.0"?> and <configuration>. These tags are mandatory and must be present at the beginning of the file.

Section tags: <platform>, <global> and <switch>. The platform section must be the first section tag and this section must include the correct platform ID and version. The global section is optional and includes configuration that is not related to specific switch ports. The switch section is optional and includes configuration that is related to specific switch ports.

Module tags: <ip>, <mac>, <port> etc. These tags identify a module controlling specific parts of the configuration.

Group tags: <port table>, <vlan table> etc. These tags identify a group of parameters, typically a table.

Parameter tags: <mode>, <entry> etc. These tags identify parameters for the specific section, module and group. The <entry> tag is used for table entries.

Configuration parameters are represented as attribute values. When saving the configuration from the switch, the entire configuration, including syntax descriptions, is included in the file. The file may then be modified using an editor and loaded to a switch.

The example below shows a small configuration file only, including configuration of the MAC address age time and the learning mode per port. When loading this file, only the included parameters will be changed. This means that the age time will be set to 200 and the learn mode will be set to automatic.

```
< ?xml version="1.0"?>
<configuration>
<platform>
<pid val="3"></pid>
<version val="1"></version>
</platform>
<global>
<mac>
<age val="200"></age>>
</mac>
</global>
<switch sid="1">
<mac>
<entry port="1-24" learn mode="auto"></entry>
</mac>
</switch>
< /configuration>
```

Save: Click to save the configuration file.

Upload: Click to upload the configuration file.

Revision History

Edition	Date	Modifications
V1.1	15-Nov. 2012	ℓ Add Command Line Interface Configuration Guide in Chapter 5. ℓ Modify the Format of the chapters. Move the Monitor, Diagnostic and Maintenance to Chapter 6 from Chapter 4. ℓ Add more description for the key features in Chapter 4, such as IPMC, SSH, HTTPS, RMON, MSTP, MVR, VLAN, Private VLAN, Access Management, Loop Protection, sFlow, Firmware Update, etc. ℓ Remove incorrect information, such as Thermal Protection, Front LED, LED status, MRP description, etc. and some incorrect wordings and figures.